


LD26RIC-AT

Remodel IC Shallow Housing for use with Triac Dimmable LED Module lighting component

SAME DAY
SHIPPING AVAILABLE

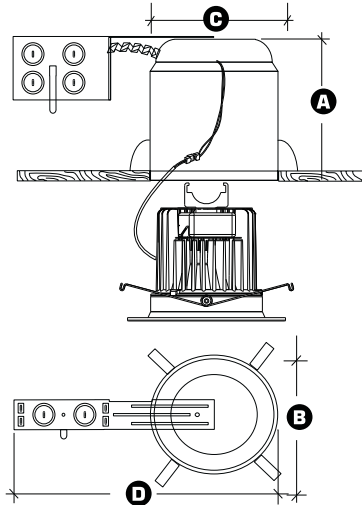

- A** Height = 5"
- B** Cut-out = 6-1/2"
- C** Length = 13"



IC
RATED

DESCRIPTION - 6" Remodel IC shallow housing for use with RL600 LED series LED Module trims. Designed for remodel installations and suitable for use in insulation covered ceilings. The LD26RIC-AT housing is engineered with a unique 'EZ-connect' wiring system, that when used with the RL600 trim, with California Title-24 (compliances pending). The unique EZ-connect system also meets other state and national regulatory mandates. LED Module connects effortlessly to housing, virtually eliminating mis-wiring and potential shock hazards.

NOTE - Complete system includes LD26RIC-AT housing and LED Modules RL600 series trim. RL600 LED Modules trim must be ordered separately.

HOUSING - Die-formed aluminum for maximum heat dissipation and rust protection. Housing can be installed in 1/2" to 1-3/8" thick ceilings. Housing is IC rated for direct contact with insulation and can be used in IC and NON-IC applications. May be installed in 2" x 8" joist construction.

CONNECTION - Polarity-specific EZ-connect system engineered to match with Elite LED Module trims. Meets strict code requirements where Edison Base Sockets have been banned. Additional wires are included for 0-10V dimming modules.

INSTALLATION - For fast and easy installation in existing plaster or mechanical ceilings the housing installs from below the ceiling. Four preinstalled spring clips with secure the housing firmly into ceiling to accommodate different ceiling thicknesses from 1/2" to 1-3/8".

JUNCTION BOX - UL Listed for through-branch circuit wiring, provided with eight 1/2" knockouts and four Romex knockouts with true pry-out slots and strain clamps.

THERMAL PROTECTION - Standard thermal protection device guards against improper installation and misuse of insulation material.

ELITE LED MODULE SOLD SEPARATELY - LD26RIC-AT unique 'EZ-connect' wiring system is Title 24-2013 compliant when used with the RL600 series module. RL600 series modules are rated to last up to 50,000hrs as tested in accordance with LM-80 standards. Driver and LED Engine are found on the module itself. The Elite **LED Module** system is fully dimmable down to 10% of initial light output with a 0-10 Volt dimmer when ordered with the following options (DIM10-MVOLT). Triac & Electronic Low Voltage dimming driver also available when ordered with the following options (DIMTR-120). Consult Factory for details.

AIR-SHUT - Provided with gasket to prevent airflow from heated or air- conditioned spaces. Meets or exceeds all national air flow requirements.

LISTING

c-UL-us - listed for Damp location
c-UL-us - listed for feed Through Wiring
LM79/LM80

DIMMING INFORMATION

DIMTR (Triac Dimming)



Example: LD26RIC-AT-RL625-750L-DIMTR-120

HOUSING TYPE				
LD26RIC-AT-DIMTR-120 - Used For Triac Dimming Module				
TRIM TYPE	750L SERIES	CCT	CRI	FINISH
RL625 (Baffle)	750L-DIMTR-120	30K 40K	85+ 90+	W-WH
TRIM TYPE	1000L SERIES	CCT	CRI	FINISH
RL670	1000L-DIMTR-120	27K 30K 40K	85+ 90+	W-WH