


MOUNTING

- Standard versatile mounting arm accommodates multiple drilling patterns as well as square and round poles
- Wall Mount available for direct wall mounting and J-box mounting
- Optional for cast aluminum slipfitter mounting adapter (Compatible with more MESTER mounting adaptors such as Tenon, suits for various application)



OAL-101/201/301-ACC-SFM
Slipfitter Mount

An optional cast aluminum mast arm adapter secures fixture head to nominal 2-3/8" O.D. horizontal steel tenon arm.



OAL-101/201/301-ACC-PM
Arm Mount

(4" and 5" Square and Round poles)
Standard versatile mounting arm is simple to install and can be used with existing poles for retrofit installations.



OAL-101/201/301-ACC-WM
Wall Mount

Wall Mount is easy to install for direct wall mounting with 1/2" conduit wiring or standard J-box mounting




OAL-101/201/301-ACC-TRN
Yoke Mount

Die-cast Aluminum trunnion is easily adapted to many surfaces and allows easy fixture aiming angles.


DIMENSION

unit: inch/mm


40W/70W/100W (Slipfitter Mount)

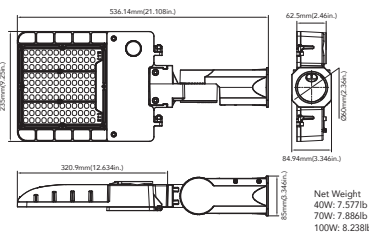


150W/200W (Slipfitter Mount)




250W/300W (Slipfitter Mount)

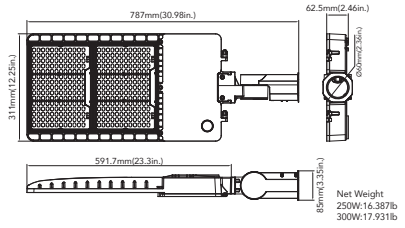


40W/70W/100W (Pole Mount)




150W/200W (Pole Mount)




250W/300W (Pole Mount)

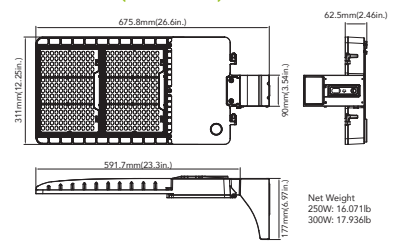


40W/70W/100W (Wall Mount)

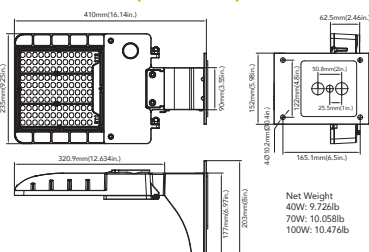


150W/200W (Wall Mount)

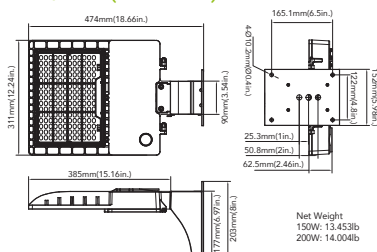


250W/300W (Wall Mount)

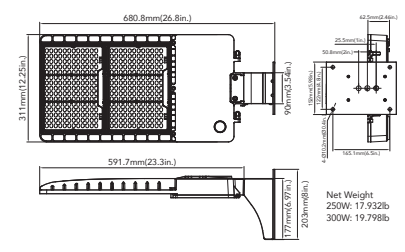


40W/70W/100W (Yoke Mount)

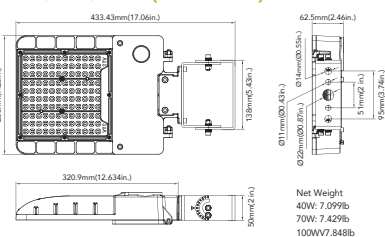

150W/200W (Yoke Mount)

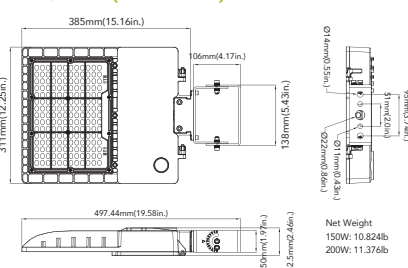

250W/300W (Yoke Mount)

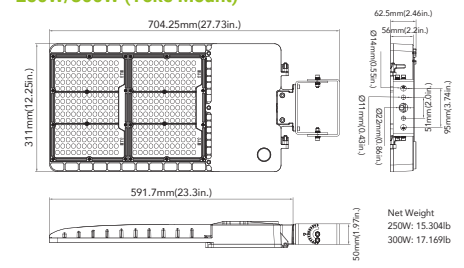

ADDITIONAL MOUNTING ACCESSORIES

POLE BRACKET • For mounting one fixture on an existing pole			
	<p>OAL-ACC-4-SQPM 4" Square Pole Mount with 2-3/8" O.D. Tenon</p> <p>Finish: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>		<p>OAL-ACC-4-RQPM 4" Round Pole Mount with 2-3/8" O.D. Tenon</p> <p>Finish: Dark Bronze USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
	<p>OAL-ACC-5-SQPM 5" Square Pole Mount with 2-3/8" O.D. Tenon</p> <p>Finish: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>		<p>OAL-ACC-5-RQPM 5" Round Pole Mount with 2-3/8" O.D. Tenon</p> <p>Finish: Dark Bronze USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.</p>
	<p>OAL-ACC-TMA Pole Bracket accessories-Tenon & Yoke Adaptor</p> <p>Finish: Dark Bronze USE: The 2-3/8" OD Tenon Mount Adaptor for Yoke Fixtures is designed to mount MESTER light fixtures that are equipped with a yoke mount onto a 2-3/8" OD tenon. It may be utilized with the Mester Flood Light Series of light fixtures.</p>		
WALL BRACKET • Attaches to any flat surface • Provides wiring access		Mid-Pole tenon Bracket	
	<p>OAL-ACC-90-WMB 90° Wall Mount Bracket with 2-3/8" O.D. Tenon</p> <p>Finish: Dark Bronze USE: The 90° wall mount bracket with 2-3/8" tenon attaches an MESTER floodlight to almost any surface: wall, roof, or wood pole. Provides wiring access and abuilt-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slipfitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.</p>		<p>OAL-ACC-HOR-TMB 2-3/8" OD Horizontal Tenon Mid-Pole Bracket</p> <p>Finish: Dark Bronze USE: 2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with an adjustable slipfitter onto a 2-3/8" OD horizontal tenon</p>
Round External Mount Horizontal Tenon • To mount 2/3/4 fixtures on a existing pole			
	<p>OAL-ACC-2-90-HOR-TA Double 90° Horizontal Tenon Adaptor</p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>		<p>OAL-ACC-3-120-HOR-TA Triple 120° Horizontal Tenon Adaptor</p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>
	<p>OAL-ACC-2-180-HOR-TA Double 180° Horizontal Tenon Adaptor</p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>		<p>OAL-ACC-4-90-HOR-TA Quad 90° Horizontal Tenon Adaptor</p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>
	<p>OAL-ACC-3-90-HOR-TA Triple 90° Horizontal Tenon Adaptor</p> <p>Finish: Dark Bronze USE: The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>		