

OFL-102-LED

LED Architectural Floodlight Series

up to 30 Wattage / up to 3600 Lumens

Catalog Number:	
Project Name:	
Note:	Type:




APPLICATIONS:

The architectural LED floodlight is the ideal compact solution when illuminating buildings, facades, displays, and small signage. Multiple lumen packages, standard 1-10V dimming, and four color temperatures provide the options needed for the design versatility that you crave. Long-lasting LEDs allow for years of maintenance free operation, saving time and money compared to traditional MH options.

FEATURES:

- Using the material of ADC 12 Aluminum alloy as radiator, the LED pin temperature does not exceed 65 °C
- Within 1000hrs, the light decay is less than 3%, while the traditional attenuation on of incandescent lamp is least 30%. It can light up to 8 years and equipped with a 5 years warranty.
- MVOLT 120-277V
- Light output from 3600 lm with efficacy up to 120L/W
- Fixtures are suitable for use in ambients from -34°C to 40°C (-30°F to 104°F)
- UL/cUL wet location listed

DIMENSION:

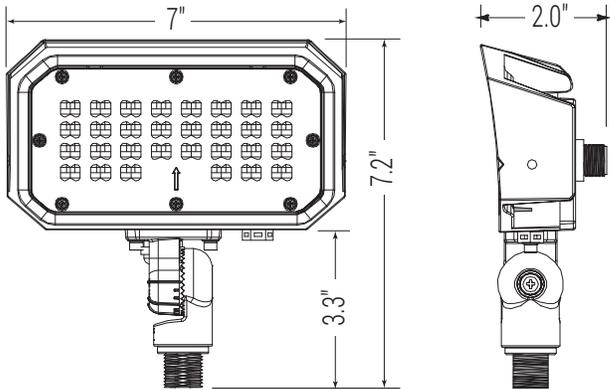

SPECIFICATIONS:

LUMENS	3600 lumens
WATTAGE	30W
CCT	40K, 50K
CRI	70
LIGHT EFFICIENCY	120 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 40°C



* For list of qualified DLC fixture, please consult factory



Ordering Guide > Example: **OFL-102-LED-3600L-DIM10-MVOLT-40K-BZ**

OFL-102-LED					
SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH
OFL-102-LED	3600L - 3600 lumens	DIM10 - 1-10V Dimming	MVOLT - 120-277V	40K - 4000K 50K - 5000K	BZ - Bronze



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.