

OFL-201-LED

LED Architectural Medium Floodlight Series

up to 90 Wattage / up to 10000 Lumens

| | |
|------------------------|--------------|
| Catalog Number: | |
| Project Name: | |
| Note: | Type: |



APPLICATIONS:

The medium architectural LED floodlight is the ideal compact solution when illuminating buildings, facades, displays, and small signage. Multiple lumen packages, standard 0-10V dimming, and four color temperatures provide the options needed for the design versatility that you crave. Long-lasting LEDs allow for years of maintenance free operation, saving time and money compared to traditional MH options.


FEATURES:

- Die-cast aluminum body with integrated heat sinking to maximize performance and long fixture life
- MVOLT 120-277V
- Light output from 6000-10000lm with efficacy up to 115 lm/W
- Replacing 250-400W MH
- Fixtures are suitable for use in ambients from -34°C to 40°C (-30°F to 104°F)
- UL/cUL wet location listed


LED LIGHT ENGINE:

LED light engine eliminates the need for a glass lens, providing the maximum amount of light output. Use of the latest generation LEDs means a higher lumen output from fewer LEDs, resulting in lower costs with greater efficacy.

DIMENSION:

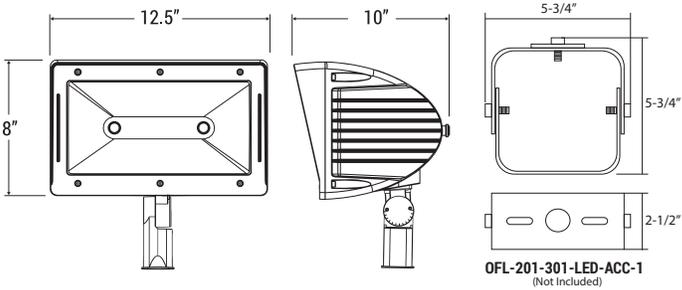

PHOTOMETRICS:

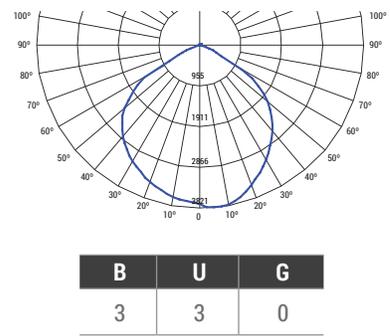

DLC PREMIUM
* For list of qualified DLC fixture, please consult factory

UL US LISTED FOR **WET LOCATION**

5 YEARS LIMITED WARRANTY

DIMMABLE 0-10V DIMMING

SPECIFICATIONS:

| | |
|-------------------------------|----------------------------|
| LUMENS | 6000 / 8000 / 10000 lumens |
| WATTAGE | 50W / 67W / 79W |
| CCT | 30K, 35K, 40K, 50K |
| CRI | 70 |
| LIGHT EFFICIENCY | 115 lumens/watt |
| VOLTAGE | 120-277 VAC |
| POWER FREQUENCY | 50/60 Hz |
| FINISH | Bronze |
| APPLICABLE ENVIRONMENT | Dry/Damp/Wet location |
| WORKING TEMPERATURE | -40°C to 40°C |

Ordering Guide > Example: **OFL-201-LED-10000L-DIM10-MVOLT-40K-BZ**

| | | | | | | |
|--------------------|--|-----------------------|------------------|--|---------------|--|
| OFL-201-LED | | | | | | |
| SERIES | PERFORMANCE | DIMMING | VOLTAGE | CCT | FINISH | OPTION |
| OFL-201-LED | 6000L - 6000 lumens 8000L - 8000 lumens 10000L - 9486 lumens | DIM10 - 0-10V Dimming | MVOLT - 120-277V | 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K | BZ - Bronze | OFL-201-301-LED-ACC-1 - Trunnion Bracket |



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.