

OFL-402-LED

LED Architectural Floodlight Series

up to 150 Wattage / up to 19500 Lumens

Catalog Number:

Project Name:

Note:

Type:




APPLICATIONS:

The architectural LED floodlight is the ideal compact solution when illuminating buildings, facades, displays, and small signage. Multiple lumen packages, standard 1-10V dimming, and four color temperatures provide the options needed for the design versatility that you crave. Long-lasting LEDs allow for years of maintenance free operation, saving time and money compared to traditional MH options.

FEATURES:

- Aluminum Alloy A383 construction is corrosion-resistant, lightweight, and durable.
- MVOLT 120-277V
- Light output from 19500 lm with efficacy up to 130L/W
- Fixtures are suitable for use in ambients from -34°C to 40°C (-30°F to 104°F)
- UL/cUL wet location listed

DIMENSION:

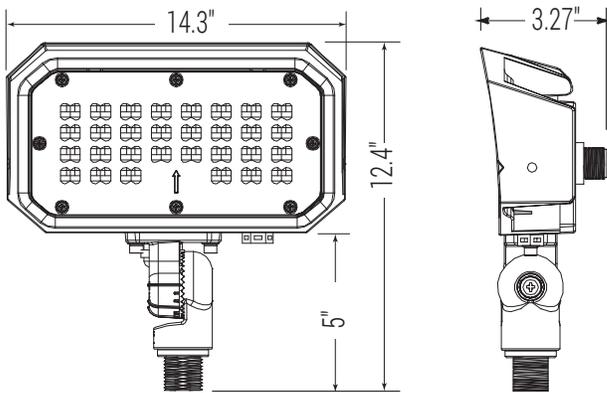

SPECIFICATIONS:

LUMENS	19500 lumens
WATTAGE	150W
CCT	40K, 50K
CRI	70
LIGHT EFFICIENCY	130 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 40°C



* For list of qualified DLC fixture, please consult factory



Ordering Guide > Example: OFL-402-LED-19500L-DIM10-MVOLT-40K-BZ

OFL-402-LED						
SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH	MOUNTING
OFL-402-LED	19500L - 195000 lumens	DIM10 - 1-10V Dimming	MVOLT - 120-277V	40K - 4000K 50K - 5000K	BZ - Bronze	OFL-402-LED-ACC-1 - TRUNNION BRACKET OFL-302/402-LED-ACC-2 - SLIP FITTER



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

Issued-B1118-Rev. 1

OFL-402-LED

LED Architectural Floodlight Series

Catalog Number:

Project Name:

Note:

Type:



OFL-402-LED-ACC-1
TRUNNION BRACKET



OFL-302/402-LED-ACC-2
SLIP FITTER

