

OFL-SL-302-LED

LED Mini Slimline Floodlight Series

45 Wattage / 5400 Lumens

Catalog Number:

Project Name:

Note:

Type:



APPLICATIONS:

The LED large slimline flood light is the perfect fixture for illuminating landscaping and building accents. With its compact design you are able to put the light where you need it. The extremely efficient long-lasting LEDs come in three color temperatures and are encased in a rugged aluminum housing with a polycarbonate lens and UV resistant powder coat to protect it from the elements.


FEATURES:

- Rugged aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection
- LED driver MVOLT 120-277V
- Lumen output of 4500 lm with efficacy of 100 lm/W
- Fixtures are IP66 rated and suitable for use in ambients from -40°C to 45°C (-40°F to 113°F)
- UL Wet location listed
- DLC qualified**


LENS:

Polycarbonate lens suitable for outdoor use with respect to exposure to ultraviolet light, water exposure, and immersion.

DIMENSION:

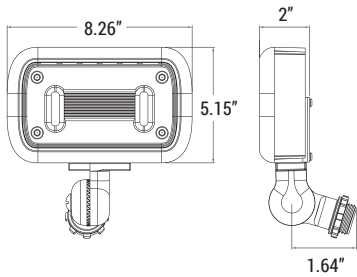

PHOTOMETRICS:

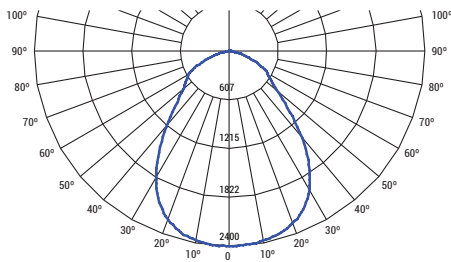

B	U	G
2	1	1



SPECIFICATIONS:

LUMENS	5400 lumens
WATTAGE	45W
CCT	30K, 40K, 50K
CRI	70
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location

Ordering Guide > Example: OFL-SL-302-LED-5400L-MVOLT-40K-BZ

OFL-SL-302-LED				
SERIES	PERFORMANCE	VOLTAGE	CCT	FINISH
OFL-SL-302-LED	5400L - 5400 lumens	MVOLT - 120/277V	30K - 3000K 40K - 4000K 50K - 5000K	BZ - Bronze

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

Issued-B1118-Rev. 1