

OFL-SL-Square Series

LED Square Slimline Floodlight Series

up to 50W / up to 5000 Lumens

Catalog Number:

Project Name:

Note:

Type:




The LED square slim line flood light is an ideal fixture for illuminating landscaping and building accents. With its compact design you are able to put the light where you need it. The extremely efficient long-lasting LEDs come in three color temperatures and are encased in an aluminum housing with an ultra clear lens.

FEATURES:

- Designed with high purity aluminum alloy housing with ultra clear high strength and toughening treatment glass cover
- Outstanding corrosion protection
- Ultra-thin and light weight
- Voltage is 120V & MVOLT (120-277V)
- Lumen output of 5000 lm with efficacy of 100 lm/W
- Fixtures are IP65 rated and suitable for use in ambients from -40°C to 45°C (-40°F to 113°F)
- UL Wet location listed

DIMENSION:

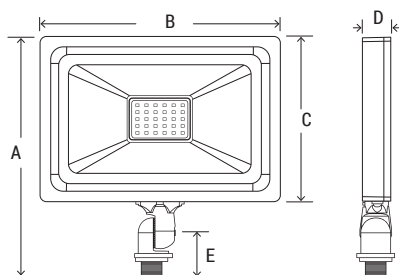

SERIES	A	B	C	D	E
OFL-SL-106-LED	6.45"	5.3"	3.5"	.8"	1.7"
OFL-SL-206-LED	8"	7.4"	5"	.9"	1.7"
OFL-SL-306-LED	9.3"	9.4"	6.5"	1.1"	1.7"
OFL-SL-406-LED	11.1"	11.8"	8.25"	1.4"	1.7"

SPECIFICATIONS:

LUMENS	1000 / 2000 / 3000 / 5000 lumens
WATTAGE	10W / 20W / 30W / 50W
CCT	30K, 40K, 50K
CRI	80
VOLTAGE	120 VAC / MVOLT
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location



Ordering Guide > Example: OFL-SL-406-LED-5000L-MVOLT-40K-BZ



SERIES

OFL-SL-106-LED-1000L-120
OFL-SL-206-LED-2000L-120
OFL-SL-306-LED-3000L-MVOLT
OFL-SL-406-LED-5000L-MVOLT



CCT

30K - 3000K
40K - 4000K
50K - 5000K



FINISH

BZ - Bronze

OFL-SL-Square Series

LED Square Slimline Floodlight Series

up to 50W / up to 5000 Lumens

Catalog Number:



Project Name:

Note:

Type:



PHOTOMETRICS:

OFL-SL-106-LED-1000L-120

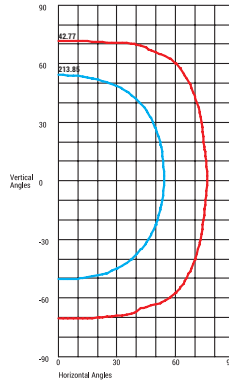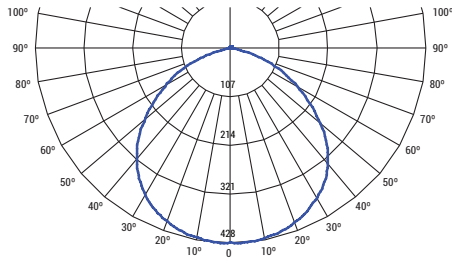



B	U	G
1	2	0

OFL-SL-206-LED-2000L-120

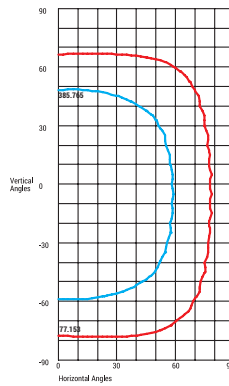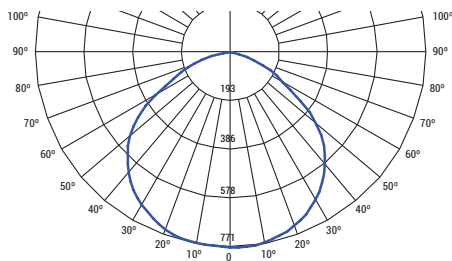



B	U	G
1	0	0

OFL-SL-306-LED-3000L-MVOLT

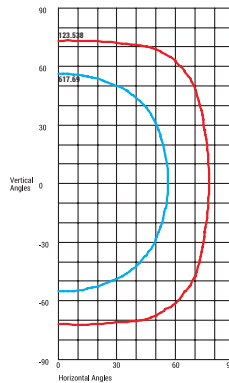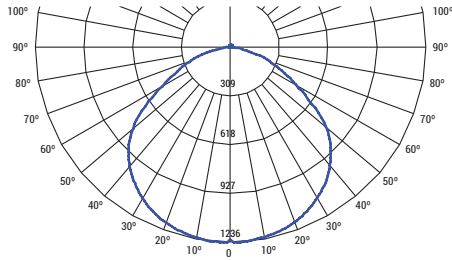

B	U	G
1	2	0

OFL-SL-406-LED-5000L-MVOLT

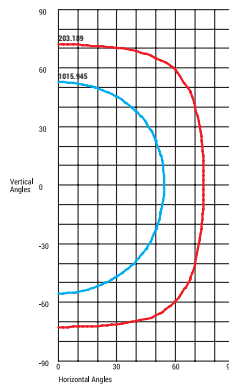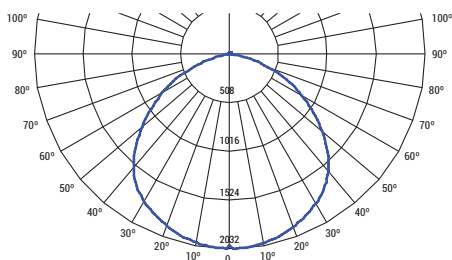

B	U	G
2	3	0