



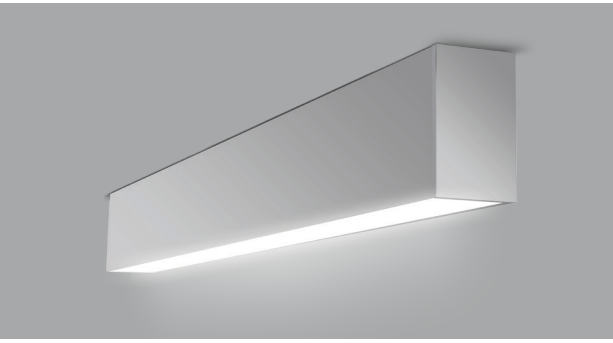

CUSTOM
COLORS

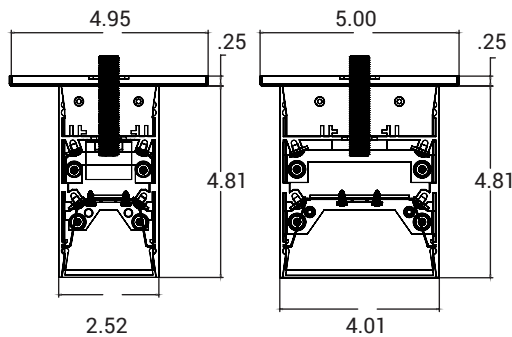

2" PROFILE

4" PROFILE

LUMENS/FT	WATTS/FT
1500	12.7
1250	10.5
1000	9.5
750	6.5
500	4.5


FEATURES

FLEX Architectural LED Ceiling Mount Linear delivers an endless array of flexibility, from straight runs to complex 90° turns. Available in small standard profiles of 2" and 4", or custom lengths, it accommodates most surfaces and installations, with fully illuminated corners to provide seamless, continuous lengths of light. Be inspired to create a long-lasting impression with a unique design that complements corporate offices, educational, commercial, and retail spaces.


LUMENS PER FOOT	500, 750, 1000, 1250, 1500 or Custom
CCT & DYNAMIC PLATFORMS	27K, 30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	85+ Standard, 90+
COLOR QUALITY	3 Step MacAdam Ellipses
WIDTHS	2", 4"
LENGTHS	2', 4', 6', 8', Continuous with 1" Increments
DISTRIBUTION PATTERNS	Standard, Wall Wash
CONFIGURATION PATTERNS & LENGTHS	Single, Continous, Square, Rectangular, L-Shape, Custom with 90, 60, or 45 ° Angles
MOUNTING	Surface
FINISH	WH (White), BK (Black), SI (Silver), Custom RAL
DIMMING & CONTROLS	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUT2W, DIMST, ELDO10.1, ELDODMX.1, DALI.1
EMERGENCY	10W - Up to 1000L Output 20W - Up to 2000L Output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



Distribution Pattern:
Standard



Distribution Pattern:
Wall Wash



OPTICS & PERFORMANCE

Fabricated from 20-gauge aluminum, with mitered corners, and post-painted with 95% reflective premium paint. The optical system delivers high efficiency LED light that passes through a high-quality acrylic lens for optimal distribution patterns, creating a glare-free and even distribution. Distributions include Direct Downlight or Wall Wash, with zero light leakage.

CONSTRUCTION

One-piece rigid aluminum extrusion, made of T6063-T5 aluminum, with cast aluminum end caps. A precision cut, smooth white extruded frosted lens with snap in design attaches firmly into the grooves of the body and can be easily removed for access to the driver and LED boards.

OPTICAL ASSEMBLY

Reflector is fabricated from 20-gauge aluminum, and post-painted finish with 95% reflective premium paint. Wall Wash reflectors are positioned at an angle.

DISTRIBUTION PATTERNS & DIFFUSER

Standard Distribution: A high-quality, smooth white frosted efficient acrylic lens is shipped standard for optimal distribution patterns, for most applications, and provides glare-free, even illumination.

Wall Wash Distribution: Illuminates from the ceiling, down, for uniform vertical illumination.

CRM INSTALLATION

For continuous row mounting, the first luminaire in the row will always be the power supply feed. After plugging in the male and female harnesses, which are supplied with each luminaire, they will easily slide together, then secured with two screws from opposite directions in the connecting brackets.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and female 18-gauge 6 wire plug connectors are included with every luminaire to allow for simple hassle-free continuous wiring, and each luminaire must be installed male to female.

LED DYNAMIC PLATFORM OPTIONS



Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)



Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3500K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)



RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver Forward Phase Control, 1% dimming in 120V only.

LUTH - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

DALI - DALI DT6, DT8 dimming down to 1%.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMST - Step Dimming

WARRANTY

Five-year warranty for parts and components. (Labor not included)





LISTINGS

c-UL-us - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory.

UL Listed for Damp location

Example: OLS-CM-LED-2-REC-W8-L6-500L-DIM10-MVOLT-35K-85-WH

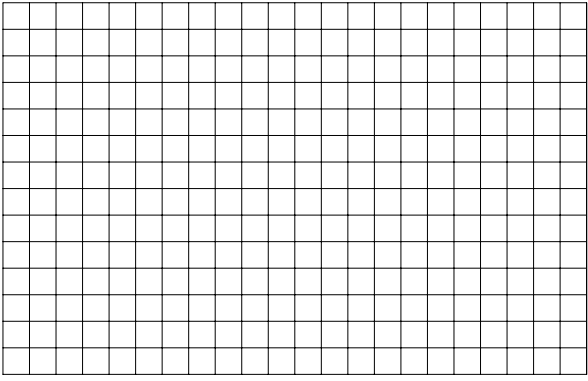OLS-CM-LED		Single Run		2, 4, 6 OR 8'		LUMENS		DISTRIBUTION		DIMMING		VOLTAGE		CRI		FINISH	
SERIES OLS-CM-LED-Oracle Ceiling Mount LED Linear		WIDTH 2 - 2" 4 - 4"				500L - per ft. 750L - per ft. 1000L - per ft. 1250L - per ft. 1500L - per ft.		(blank) - Standard WW - Wall Wash		DIM10 - 0-10V Dimming DIMST - Step Dimming LUTH - Lutron HiLum LUT2W - Lutron 2- Wire ELDO10.1 - EldoLED 0-10V DALI.1 - EldoLED DALI Type 8 ELDODMX.1 - EldoLED DMX		120 277 MVOLT 347* * Consult factory for details		85 90		WH - White SI - Silver BK - Black RAL - Consult factory	
SHAPE S - Single Unit CR - Continuous Run REC - Rectangle CUS - Custom (Consult Factory)		Cont. Run		XX . YY*		*XX is Length in Feet YY is Fraction in Inches e.g. 22.6 is 22 feet and 6 inches						CCT 30K 35K 40K 50K		EMERGENCY O-EMG-LED-10W O-EMG-LED-20W O-EMG-LED-G2-10W-SDT*		OTHER OPTIONS FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interf. Sensor USA - Made in America Compliance	
				TOTAL RUN													
		Rectangle		W		L											
		Custom		WIDTH		LENGTH											
																	
								DRAW YOUR CUSTOM SHAPE HERE									
																	

- LUT2W available in 120V
- ELDO10, ELDODMX, LUTH available 120-277
- * Consult Factory

OLS-CM-LED-2-S-4-750L-DIM10-MVOLT-40K-85

INPUT WATTS: **27**

LUMENS: **3042**


CRI: **85**

EFFICACY: **113**

CCT: **4000K**

TEST NO.: **EL081811**

Candle Power Distribution (Candelas)

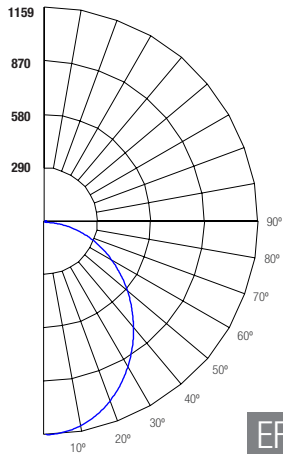

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	867.19	28.50	28.50
0-40°	1394.29	45.80	45.80
0-60°	2382.03	78.30	78.30
0-90°	3010.49	98.90	99.00
0-180°	3042.13	100.00	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	15844	14976	14258
45°	14896	13902	13092
55°	13973	12937	12131
65°	12587	11689	11017
75°	11742	11027	10542

Candela Tabulation

	0	45	90
0	1157.13	1157.13	1157.13
5	1148.97	1147.74	1147.74
15	1096.82	1086.31	1078.26
25	998.43	975.07	955.13
35	864.91	830.35	801.53
45	708.41	669.61	637.50
55	540.28	504.22	474.84
65	373.41	345.71	324.17
75	206.00	191.31	180.31
85	64.71	60.77	58.10
90	8.26	9.26	9.92

Spacing Criteria

0-180°	: 1.22
90-270°	: 1.16
Diagonal	: 1.3

EFFICACY: 113 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

ROOM CAVITY RATIO	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
	0	119	119	119	119	116	116	116	116	110	110	110	106	106	106	101	101	101	99			
	1	108	104	99	95	106	101	97	94	97	94	91	93	90	88	89	87	85	83			
	2	99	90	84	78	96	88	82	77	85	79	75	81	77	73	78	74	71	69			
	3	90	80	71	65	87	78	70	64	75	68	63	72	66	62	69	65	61	58			
	4	83	71	62	55	80	69	61	55	67	59	54	58	53	52	62	57	52	50			
	5	76	63	54	48	74	62	54	47	60	52	47	58	51	46	56	50	46	43			
	6	70	57	48	42	68	56	48	42	54	47	41	52	46	41	51	45	40	38			
	7	65	52	43	37	63	51	43	37	49	42	36	48	41	36	46	40	36	34			
	8	61	47	39	33	59	47	39	33	45	38	33	44	37	32	43	37	32	30			
	9	57	44	35	30	55	43	35	30	42	35	30	40	34	29	39	33	29	27			
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25				
RC - Ceiling Cavity Reflectance					RW - Wall Reflectance																	

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

OLS-CM-LED-2-S-4-1000L-DIM10-MVOLT-40K-85

INPUT WATTS: **38.1**

LUMENS: **4163**


CRI: **85**

EFFICACY: **109**

CCT: **4000K**

TEST NO.: **EL081815**

Candle Power Distribution (Candelas)

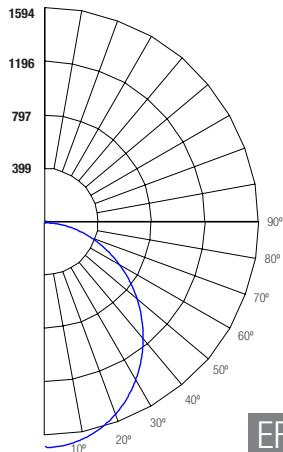

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	1189.77	28.60	28.60
0-40°	1908.1	45.80	45.80
0-60°	3259.33	78.30	78.30
0-90°	4119.56	99.00	99.00
0-180°	4163.00	100.00	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	21822	20557	19573
45°	20499	19063	17990
55°	18997	17519	16455
65°	17290	16014	15136
75°	16095	15093	14563

Candela Tabulation

	0	45	90
0	1588.334	1588.334	1588.334
5	1584.100	1578.230	1576.730
15	1511.610	1492.910	1480.760
25	1375.910	1339.440	1311.160
35	1191.740	1139.840	1100.770
45	975.700	919.140	875.140
55	743.480	691.410	652.480
65	507.670	468.160	439.740
75	282.960	262.080	247.720
85	88.700	83.180	80.260
90	10.850	12.490	14.070

Spacing Criteria

0-180°	: 1.22
90-270°	: 1.16
Diagonal	: 1.3

EFFICACY: 109 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

ROOM CAVITY RATIO	RC	80%				70%				50%			30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
	1	108	104	99	95	106	101	97	94	97	94	91	93	90	88	89	87	85	83
	2	99	90	84	78	96	88	82	77	85	79	75	81	77	73	78	75	71	69
	3	90	80	71	65	88	78	70	64	75	68	63	72	66	62	69	65	61	58
	4	83	71	62	55	80	69	61	55	67	60	54	64	58	53	62	57	52	50
	5	76	63	54	48	74	62	54	47	60	52	47	58	51	46	56	50	46	43
	6	70	57	48	42	68	56	48	42	54	47	41	52	46	41	51	45	40	38
	7	65	52	43	37	63	51	43	37	49	42	37	48	41	36	46	40	36	34
	8	61	47	39	33	59	47	39	33	45	38	33	44	37	32	43	37	32	30
	9	57	44	35	30	55	43	35	30	42	35	30	41	34	29	39	33	29	27
10	53	40	32	27	52	40	32	27	39	32	27	38	31	27	37	31	27	25	
RC - Ceiling Cavity Reflectance					RW - Wall Reflectance														

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

OLS-CM-LED-2-S-4-1000L-WW-DIM10-MVOLT-40K-85

INPUT WATTS: **38.1**


LUMENS: **4134**

CRI: **85**

EFFICACY: **109**

CCT: **4000K**

Candle Power Distribution (Candelas)

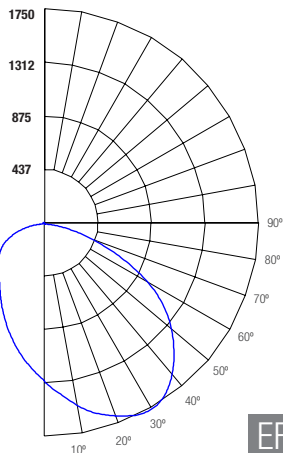

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-30°	1037.92	25.10	25.10
0-40°	1736.47	42.00	42.00
0-60°	3169.87	76.70	76.70
0-90°	4083.58	98.80	98.80
0-180°	4134.47	100.00	100.00

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0°	Average 45°	Average 90°
0°	18869	32824	33644
45°	17376	32795	33323
55°	15137	31570	28666
65°	12400	27097	19678
75°	7984	20382	13293

Candela Tabulation

	0	45	90
0	1280.719	1280.719	1280.719
5	1284.620	1357.100	1386.590
15	1242.170	1491.500	1597.080
25	1153.210	1564.260	1726.410
35	1019.980	1583.000	1714.380
45	843.700	1467.650	1504.310
55	630.210	1189.440	1208.590
65	404.510	843.650	766.060
75	202.940	443.470	322.050
85	44.000	112.330	73.260
90	4.070	21.980	17.600

Spacing Criteria

0-180°	: 1.28
90-270°	: 1.82
Diagonal	: 1.5

EFFICACY: 109 LM/W

Coefficients of Utilization - Zonal Cavity Method
Effective Floor Cavity Reflectance 20% = PF

ROOM CAVITY RATIO	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
	0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99			
	1	108	103	99	95	105	101	97	93	96	93	90	92	90	87	88	86	84	82			
	2	98	90	83	77	95	88	81	76	84	78	74	80	76	72	77	73	70	68			
	3	89	78	70	63	87	77	69	63	73	67	61	71	65	60	68	63	59	57			
	4	81	69	60	53	79	68	59	53	65	58	52	63	56	51	60	55	50	48			
	5	75	62	52	46	72	60	52	45	58	50	45	56	49	44	54	48	43	41			
	6	69	55	46	40	67	54	46	39	52	45	39	50	44	38	49	43	38	36			
	7	64	50	41	35	62	49	41	35	47	40	34	46	39	34	44	38	34	32			
8	59	45	37	31	58	45	36	31	43	36	30	42	35	30	41	35	30	28				
9	55	42	33	28	54	41	33	28	40	32	27	39	32	27	37	31	27	25				
10	52	38	30	25	50	38	30	25	37	30	25	36	29	25	35	29	24	23				
DC - Ceiling Cavity Reflectance										DW - Wall Reflectance												

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated contol systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON®	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	☐ LEDRU LED Relay Zone Controller 0-10V ¹	☐ FCJS-0-10 Lutron Vive 0-10V Individual Control Models ^{1 4}	☐ CU-4E-FMH Fixture Mount Control Unit ¹⁵	☐ ZL027 –NOW Intellect Power Control Module ^{1 6}	☐ EN-WCM2-ZB-DR Wireless Control Module ^{1 7}	☐ XITANIUM SR LED DRIVER The Philips Advance Xitanium SR LED driver ^{1 8}	☐ LMFC-011 ON/OFF/0-10V dimming fixture controller ^{1 9}
	☐ LEDDU LED Zone Controller 0-10V ¹	☐ FCJS-ECO Lutron Vive Eco-system Individual Control Models ^{1 4}		☐ ZL027 –DLE Intellect Power Control Module ^{1 6}	☐ EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ^{1 7}		☐ FS-PP-V2 FS-PP Fixture Integrated Sensor Power Pack ^{1 9}
INTEGRATED OCCUPANCY& DAYLIGHT SENSOR	N/A	☐ DFCSJ-OEM-OCC Clear Connect (RF) and Occupancy/ Daylight Sensing ²	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Indipendent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Serface Mount Sensor (Must be Specified with CU- 4E-FMH Control Unit) ²	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ²	☐ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor	☐ SNS200 SNS200 for grouping ²	☐ FD-301 Fixture integrated Daylight Dimming Sensor ²
			☐ ZL00J-DOW Intellect Intelligent Fixture Control System ²	☐ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM ²	☐ SNS300 SNS300 for networks ²	☐ FS-205 Fixture integrated passive infrared occupancy sensor ²	
*WIRELESS OCCUPANCY SENSOR	☐ EOSCU-W-EO Occupancy Sensor - Ceiling Mounted ³	☐ LRF2-OCR2B-P-WH Ceiling mount360° ,occupancy/vacancy sensor ³	N/A	N/A	☐ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	☐ ELLSU-W-EO Light Level Sensor - Ceiling Mounted ³	☐ LRF2-DCRB-WH Ceiling-mount daylight sensor ³	N/A	N/A	☐ EN-SCPPH- 1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³	N/A	☐ LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	☐ SU-5E-IoT IoT Node Micro Sensor ☐ SU-5E-CL Connected Micro Sensor ☐ SU-5E-IL Indipendent Micro Sensor ☐ SU-5S-H(IoT/CL/IL) Serface Mount Sensor (Must be specified with CU- 4E-FMH Control Unit) ³	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ☐ ZL00J-DOW Intellect Intelligent Fixture Control System (Must be specified with ZL027-NOW and ZL00J- DOW Control unit) ³	☐ EN-CLM- PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ ZBHA- CLM-DIM-ENC Connected Lighting Module DIM (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit) ³	☐ SNS200-CMP SNS-200 for Grouping ³	N/A
ACCESSORIES	N/A	N/A	☐ TMC-SU-5E Tile Mount Carrier ☐ CBL-5E-CU4-30N 30 Inch Sensor cable for CU-4 and IoT Ready ☐ CBL-5E-CU4-7F 7 Foot sensor cable for CU-4 and IoT Ready Driver	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/ vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors	6- Luminaire will be compatible with LEVITON I ntellect APP & Keypad room controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor	8- Luminaire will be compatible with philips field and wireless switch	9- Luminaire will be compatible with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand.