





CUSTOM  
COLORS



2" PROFILE



4" PROFILE

| LUMENS/FT | WATTS/FT |
|-----------|----------|
| 1500      | 12.7     |
| 1250      | 10.5     |
| 1000      | 9.5      |
| 750       | 6.5      |
| 500       | 4.5      |


## FEATURES

FLEX Architectural LED Wall Mount Linear delivers an endless array of flexibility, from straight runs to complex 90° turns. Available in small standard profiles of 2" and 4", or custom lengths, it accommodates most surfaces and installations, with fully illuminated corners to provide seamless, continuous lengths of light. Be inspired to create a long-lasting impression with a unique design that complements corporate offices, educational, commercial, and retail spaces.


|                                  |                                                                                                                |
|----------------------------------|----------------------------------------------------------------------------------------------------------------|
| LUMENS PER FOOT                  | 500, 750, 1000, 1250, 1500 or Custom                                                                           |
| CCT & DYNAMIC PLATFORMS          | 27K, 30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White                                              |
| CRI                              | 85+ Standard, 90+                                                                                              |
| COLOR QUALITY                    | 3 Step MacAdam Ellipses                                                                                        |
| WIDTHS                           | 2", 4"                                                                                                         |
| LENGTHS                          | 2', 4', 6', 8', Continuous with 1" Increments                                                                  |
| DISTRIBUTION PATTERNS            | Standard, Wall Wash                                                                                            |
| CONFIGURATION PATTERNS & LENGTHS | Single, Continous, Square, Rectangular, L-Shape, Custom with 90, 60, or 45 ° Angles                            |
| MOUNTING                         | Wall                                                                                                           |
| FINISH                           | WH (White), BK (Black), SI (Silver), Custom RAL                                                                |
| DIMMING & CONTROLS               | 0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUT2W, DIMST, ELDO10.1, ELDODMX.1, DALI.1                |
| EMERGENCY                        | 10W - Up to 1000L Output<br>20W - Up to 2000L Output<br>EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory) |
| LIFETIME                         | L70 at 50,000 Hours                                                                                            |
| PHOTOMETRIC TESTS                | In Accordance with IES LM79-08, LM80 and TM-30, TM-21                                                          |



Distribution Pattern:  
Standard



Distribution Pattern:  
Wall Wash



### OPTICS & PERFORMANCE

Fabricated from 20-gauge aluminum, with mitered corners, and post-painted with 95% reflective premium paint. The optical system delivers high efficiency LED light that passes through a high-quality acrylic lens for optimal distribution patterns, creating a glare-free and even distribution. Distributions include Direct Downlight or Wall Wash, with zero light leakage.

### CONSTRUCTION

One-piece rigid aluminum extrusion, made of T6063-T5 aluminum, with cast aluminum end caps. A precision cut, smooth white extruded frosted lens with snap in design attaches firmly into the grooves of the body and can be easily removed for access to the driver and LED boards.

### OPTICAL ASSEMBLY

Reflector is fabricated from 20-gauge aluminum, and post-painted finish with 95% reflective premium paint. Wall Wash reflectors are positioned at an angle.

### DISTRIBUTION PATTERNS & DIFFUSER

Standard Distribution: A high-quality, smooth white frosted efficient acrylic lens is shipped standard for optimal distribution patterns, for most applications, and provides glare-free, even illumination.

Wall Wash Distribution: Illuminates from the ceiling, down, for uniform vertical illumination.

### CRM INSTALLATION

For continuous row mounting, the first luminaire in the row will always be the power supply feed. After plugging in the male and female harnesses, which are supplied with each luminaire, they will easily slide together, then secured with two screws from opposite directions in the connecting brackets.

### DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00. Male and female 18-gauge 6 wire plug connectors are included with every luminaire to allow for simple hassle-free continuous wiring, and each luminaire must be installed male to female.

### LED DYNAMIC PLATFORM OPTIONS



**Tunable White with Smart White Technology** utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)



**Dims to Warm with Smart Dimming Technology.** At 100% full brightness the luminaire is at 3500K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)



**RGB+White with Smart Hue Technology** provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

### DIMMING & DRIVER INFORMATION

**DIM10** - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

**LUT2W** - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver Forward Phase Control, 1% dimming in 120V only.

**LUTH** - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology.

**ELDO10.1** - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

**DALI** - DALI DT6, DT8 dimming down to 1%.

**ELDODMX** - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

**DIMST** - Step Dimming

### WARRANTY

Five-year warranty for parts and components. (Labor not included)


### LISTINGS

c-UL-us - Listed for Feed Through Wiring.

All LED luminaires are rated and tested to LM-79 and LM-80 standards by an independent laboratory. Listed for DLC, California Title 24 compliant.

UI Listed for Damp location.

Example: **OLS-WD-LED-2-REC-W8-L6-500L-DIM10-MVOLT-35K-85-WH**

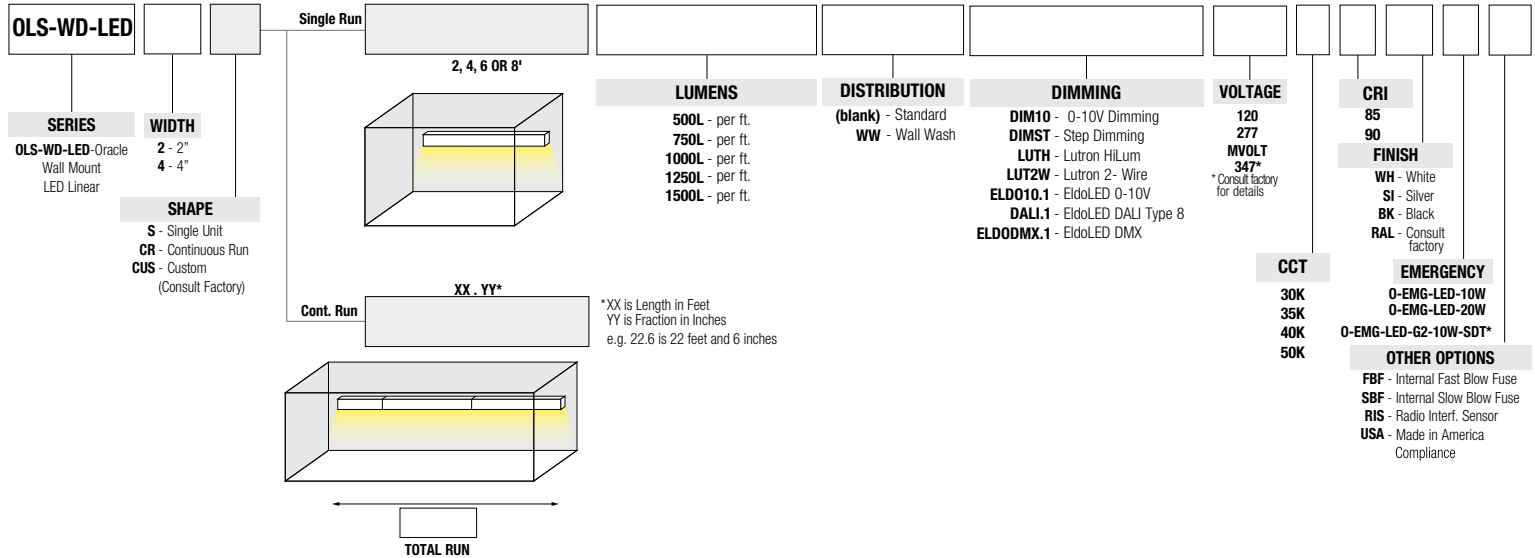

- LUT2W available in 120V
- ELDO10, ELDODMX, LUTH available 120-277
- \* Consult Factory

**OLS-WD-LED-2-S-4-750L-DIM10-MVOLT-40K-85**

TEST NO.: **EL081811**

INPUT WATTS: **27**


LUMENS: **3042**

CRI: **85**

EFFICACY: **113**

CCT: **4000K**

**Candle Power Distribution (Candelas)**

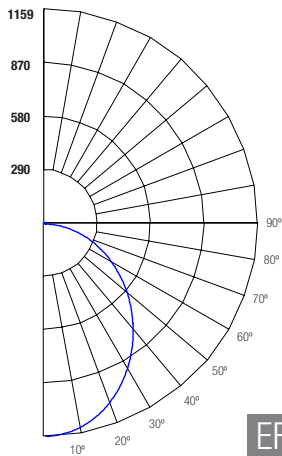

**Zonal Lumens Summary**

| Zone   | Lumens  | %Lamp  | %Fixt  |
|--------|---------|--------|--------|
| 0-30°  | 867.19  | 28.50  | 28.50  |
| 0-40°  | 1394.29 | 45.80  | 45.80  |
| 0-60°  | 2382.03 | 78.30  | 78.30  |
| 0-90°  | 3010.49 | 98.90  | 99.00  |
| 0-180° | 3042.13 | 100.00 | 100.00 |

**Luminance Data (cd/sq.m)**

| Angle In Degrees | Average 0° | Average 45° | Average 90° |
|------------------|------------|-------------|-------------|
| 0°               | 15844      | 14976       | 14258       |
| 45°              | 14896      | 13902       | 13092       |
| 55°              | 13973      | 12937       | 12131       |
| 65°              | 12587      | 11689       | 11017       |
| 75°              | 11742      | 11027       | 10542       |

**Candela Tabulation**

|    | 0       | 45      | 90      |
|----|---------|---------|---------|
| 0  | 1157.13 | 1157.13 | 1157.13 |
| 5  | 1148.97 | 1147.74 | 1147.74 |
| 15 | 1096.82 | 1086.31 | 1078.26 |
| 25 | 998.43  | 975.07  | 955.13  |
| 35 | 864.91  | 830.35  | 801.53  |
| 45 | 708.41  | 669.61  | 637.50  |
| 55 | 540.28  | 504.22  | 474.84  |
| 65 | 373.41  | 345.71  | 324.17  |
| 75 | 206.00  | 191.31  | 180.31  |
| 85 | 64.71   | 60.77   | 58.10   |
| 90 | 8.26    | 9.26    | 9.92    |

**Spacing Criteria**

|          |        |
|----------|--------|
| 0-180    | : 1.22 |
| 90-270   | : 1.16 |
| Diagonal | : 1.3  |

**EFFICACY: 113 LM/W**

**Coefficients of Utilization - Zonal Cavity Method**  
Effective Floor Cavity Reflectance 20% = PF

| ROOM CAVITY RATIO               | RC | 80% |     |     |                       | 70% |     |     |     | 50% |     |     |     | 30% |     |     |     | 10% |    |  |  | 0% |
|---------------------------------|----|-----|-----|-----|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|--|--|----|
|                                 | RW | 70% | 50% | 30% | 10%                   | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% |  |  |    |
|                                 | 0  | 119 | 119 | 119 | 119                   | 116 | 116 | 116 | 116 | 110 | 110 | 110 | 106 | 106 | 106 | 101 | 101 | 101 | 99 |  |  |    |
|                                 | 1  | 108 | 104 | 99  | 95                    | 106 | 101 | 97  | 94  | 97  | 94  | 91  | 93  | 90  | 88  | 89  | 87  | 85  | 83 |  |  |    |
|                                 | 2  | 99  | 90  | 84  | 78                    | 96  | 88  | 82  | 77  | 85  | 79  | 75  | 81  | 77  | 73  | 78  | 74  | 71  | 69 |  |  |    |
|                                 | 3  | 90  | 80  | 71  | 65                    | 87  | 78  | 70  | 64  | 75  | 68  | 63  | 72  | 66  | 62  | 69  | 65  | 61  | 58 |  |  |    |
|                                 | 4  | 83  | 71  | 62  | 55                    | 80  | 69  | 61  | 55  | 67  | 59  | 54  | 64  | 58  | 53  | 57  | 52  | 50  | 48 |  |  |    |
|                                 | 5  | 76  | 63  | 54  | 48                    | 74  | 62  | 54  | 47  | 60  | 52  | 47  | 58  | 51  | 46  | 56  | 50  | 46  | 43 |  |  |    |
|                                 | 6  | 70  | 57  | 48  | 42                    | 68  | 56  | 48  | 42  | 54  | 47  | 41  | 52  | 46  | 41  | 51  | 45  | 40  | 38 |  |  |    |
|                                 | 7  | 65  | 52  | 43  | 37                    | 63  | 51  | 43  | 37  | 49  | 42  | 36  | 48  | 41  | 36  | 46  | 40  | 36  | 34 |  |  |    |
|                                 | 8  | 61  | 47  | 39  | 33                    | 59  | 47  | 39  | 33  | 45  | 38  | 33  | 44  | 37  | 32  | 43  | 37  | 32  | 30 |  |  |    |
|                                 | 9  | 57  | 44  | 35  | 30                    | 55  | 43  | 35  | 30  | 42  | 35  | 30  | 40  | 34  | 29  | 39  | 33  | 29  | 27 |  |  |    |
|                                 | 10 | 53  | 40  | 32  | 27                    | 52  | 40  | 32  | 27  | 39  | 32  | 27  | 38  | 31  | 27  | 37  | 31  | 27  | 25 |  |  |    |
| RC - Ceiling Cavity Reflectance |    |     |     |     | RW - Wall Reflectance |     |     |     |     |     |     |     |     |     |     |     |     |     |    |  |  |    |

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

**OLS-WD-LED-2-S-4-1000L-DIM10-MVOLT-40K-85**

TEST NO.: **EL081815**

INPUT WATTS: **38.1**


LUMENS: **4163**

CRI: **85**

EFFICACY: **109**

CCT: **4000K**

**Candle Power Distribution (Candelas)**

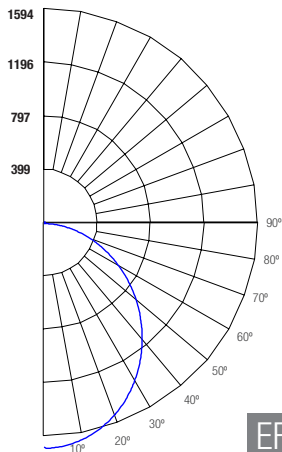

**Zonal Lumens Summary**

| Zone   | Lumens  | %Lamp  | %Fixt  |
|--------|---------|--------|--------|
| 0-30°  | 1189.77 | 28.60  | 28.60  |
| 0-40°  | 1908.1  | 45.80  | 45.80  |
| 0-60°  | 3259.33 | 78.30  | 78.30  |
| 0-90°  | 4119.56 | 99.00  | 99.00  |
| 0-180° | 4163.00 | 100.00 | 100.00 |

**Luminance Data (cd/sq.m)**

| Angle In Degrees | Average 0° | Average 45° | Average 90° |
|------------------|------------|-------------|-------------|
| 0°               | 21822      | 20557       | 19573       |
| 45°              | 20499      | 19063       | 17990       |
| 55°              | 18997      | 17519       | 16455       |
| 65°              | 17290      | 16014       | 15136       |
| 75°              | 16095      | 15093       | 14563       |

**Candela Tabulation**

|    | 0        | 45       | 90       |
|----|----------|----------|----------|
| 0  | 1588.334 | 1588.334 | 1588.334 |
| 5  | 1584.100 | 1578.230 | 1576.730 |
| 15 | 1511.610 | 1492.910 | 1480.760 |
| 25 | 1375.910 | 1339.440 | 1311.160 |
| 35 | 1191.740 | 1139.840 | 1100.770 |
| 45 | 975.700  | 919.140  | 875.140  |
| 55 | 743.480  | 691.410  | 652.480  |
| 65 | 507.670  | 468.160  | 439.740  |
| 75 | 282.960  | 262.080  | 247.720  |
| 85 | 88.700   | 83.180   | 80.260   |
| 90 | 10.850   | 12.490   | 14.070   |

**Spacing Criteria**

|          |        |
|----------|--------|
| 0-180    | : 1.22 |
| 90-270   | : 1.16 |
| Diagonal | : 1.3  |

**EFFICACY: 109 LM/W**

**Coefficients of Utilization - Zonal Cavity Method**  
Effective Floor Cavity Reflectance 20% = PF

| ROOM CAVITY RATIO               | RC | 80% |     |     |                       | 70% |     |     |     | 50% |     |     |     | 30% |     |     |     | 10% |    |  |  | 0% |
|---------------------------------|----|-----|-----|-----|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|--|--|----|
|                                 | RW | 70% | 50% | 30% | 10%                   | 70% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% |  |  |    |
|                                 | 0  | 119 | 119 | 119 | 119                   | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 101 | 101 | 101 | 99 |  |  |    |
|                                 | 1  | 108 | 104 | 99  | 95                    | 106 | 101 | 97  | 94  | 97  | 94  | 91  | 93  | 90  | 88  | 89  | 87  | 85  | 83 |  |  |    |
|                                 | 2  | 99  | 90  | 84  | 78                    | 96  | 88  | 82  | 77  | 85  | 79  | 75  | 81  | 77  | 73  | 78  | 75  | 71  | 69 |  |  |    |
|                                 | 3  | 90  | 80  | 71  | 65                    | 88  | 78  | 70  | 64  | 75  | 68  | 63  | 72  | 66  | 62  | 69  | 65  | 61  | 58 |  |  |    |
|                                 | 4  | 83  | 71  | 62  | 55                    | 80  | 69  | 61  | 55  | 67  | 60  | 54  | 64  | 58  | 53  | 62  | 57  | 52  | 50 |  |  |    |
|                                 | 5  | 76  | 63  | 54  | 48                    | 74  | 62  | 54  | 47  | 60  | 52  | 47  | 58  | 51  | 46  | 56  | 50  | 46  | 43 |  |  |    |
|                                 | 6  | 70  | 57  | 48  | 42                    | 68  | 56  | 48  | 42  | 54  | 47  | 41  | 52  | 46  | 41  | 51  | 45  | 40  | 38 |  |  |    |
|                                 | 7  | 65  | 52  | 43  | 37                    | 63  | 51  | 43  | 37  | 49  | 42  | 37  | 48  | 41  | 36  | 46  | 40  | 36  | 34 |  |  |    |
|                                 | 8  | 61  | 47  | 39  | 33                    | 59  | 47  | 39  | 33  | 45  | 38  | 33  | 44  | 37  | 32  | 43  | 37  | 32  | 30 |  |  |    |
|                                 | 9  | 57  | 44  | 35  | 30                    | 55  | 43  | 35  | 30  | 42  | 35  | 30  | 41  | 34  | 29  | 39  | 33  | 29  | 27 |  |  |    |
| 10                              | 53 | 40  | 32  | 27  | 52                    | 40  | 32  | 27  | 39  | 32  | 27  | 38  | 31  | 27  | 37  | 31  | 27  | 25  |    |  |  |    |
| RC - Ceiling Cavity Reflectance |    |     |     |     | RW - Wall Reflectance |     |     |     |     |     |     |     |     |     |     |     |     |     |    |  |  |    |

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

**OLS-WD-LED-2-S-4-1000L-WW-DIM10-MVOLT-40K-85**

INPUT WATTS: **38.1**


LUMENS: **4134**

CRI: **85**

EFFICACY: **109**

CCT: **4000K**

**Candle Power Distribution (Candelas)**

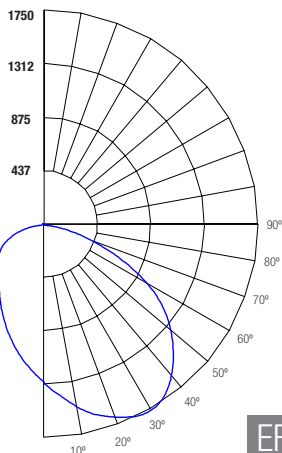

**Zonal Lumens Summary**

| Zone   | Lumens  | %Lamp  | %Fixt  |
|--------|---------|--------|--------|
| 0-30°  | 1037.92 | 25.10  | 25.10  |
| 0-40°  | 1736.47 | 42.00  | 42.00  |
| 0-60°  | 3169.87 | 76.70  | 76.70  |
| 0-90°  | 4083.58 | 98.80  | 98.80  |
| 0-180° | 4134.47 | 100.00 | 100.00 |

**Luminance Data (cd/sq.m)**

| Angle In Degrees | Average 0° | Average 45° | Average 90° |
|------------------|------------|-------------|-------------|
| 0°               | 18869      | 32824       | 33644       |
| 45°              | 17376      | 32795       | 33323       |
| 55°              | 15137      | 31570       | 28666       |
| 65°              | 12400      | 27097       | 19678       |
| 75°              | 7984       | 20382       | 13293       |

**Candela Tabulation**

|    | 0        | 45       | 90       |
|----|----------|----------|----------|
| 0  | 1280.719 | 1280.719 | 1280.719 |
| 5  | 1284.620 | 1357.100 | 1386.590 |
| 15 | 1242.170 | 1491.500 | 1597.080 |
| 25 | 1153.210 | 1564.260 | 1726.410 |
| 35 | 1019.980 | 1583.000 | 1714.380 |
| 45 | 843.700  | 1467.650 | 1504.310 |
| 55 | 630.210  | 1189.440 | 1208.590 |
| 65 | 404.510  | 843.650  | 766.060  |
| 75 | 202.940  | 443.470  | 322.050  |
| 85 | 44.000   | 112.330  | 73.260   |
| 90 | 4.070    | 21.980   | 17.600   |

**Spacing Criteria**

|          |        |
|----------|--------|
| 0-180    | : 1.28 |
| 90-270   | : 1.82 |
| Diagonal | : 1.5  |

**EFFICACY: 109 LM/W**

**Coefficients of Utilization - Zonal Cavity Method**  
Effective Floor Cavity Reflectance 20% = PF

| ROOM CAVITY RATIO               | RC | 80% |     |     |     | 70% |     |     |     | 50%                   |     |     |     | 30% |     |     |     | 10% |    |  |  | 0% |
|---------------------------------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------------|-----|-----|-----|-----|-----|-----|-----|-----|----|--|--|----|
|                                 | RW | 70% | 50% | 30% | 10% | 70% | 50% | 30% | 10% | 50%                   | 30% | 10% | 50% | 30% | 10% | 50% | 30% | 10% | 0% |  |  |    |
|                                 | 0  | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 110                   | 110 | 110 | 105 | 105 | 105 | 101 | 101 | 101 | 99 |  |  |    |
|                                 | 1  | 108 | 103 | 99  | 95  | 105 | 101 | 97  | 93  | 96                    | 93  | 90  | 92  | 90  | 87  | 88  | 86  | 84  | 82 |  |  |    |
|                                 | 2  | 98  | 90  | 83  | 77  | 95  | 88  | 81  | 76  | 84                    | 78  | 74  | 80  | 76  | 72  | 77  | 73  | 70  | 68 |  |  |    |
|                                 | 3  | 89  | 78  | 70  | 63  | 87  | 77  | 69  | 63  | 73                    | 67  | 61  | 71  | 65  | 60  | 68  | 63  | 59  | 57 |  |  |    |
|                                 | 4  | 81  | 69  | 60  | 53  | 79  | 68  | 59  | 53  | 65                    | 58  | 52  | 63  | 56  | 51  | 60  | 55  | 50  | 48 |  |  |    |
|                                 | 5  | 75  | 62  | 52  | 46  | 72  | 60  | 52  | 45  | 58                    | 50  | 45  | 56  | 49  | 44  | 54  | 48  | 43  | 41 |  |  |    |
|                                 | 6  | 69  | 55  | 46  | 40  | 67  | 54  | 46  | 39  | 52                    | 45  | 39  | 50  | 44  | 38  | 49  | 43  | 38  | 36 |  |  |    |
|                                 | 7  | 64  | 50  | 41  | 35  | 62  | 49  | 41  | 35  | 47                    | 40  | 34  | 46  | 39  | 34  | 44  | 38  | 34  | 32 |  |  |    |
| 8                               | 59 | 45  | 37  | 31  | 58  | 45  | 36  | 31  | 43  | 36                    | 30  | 42  | 35  | 30  | 41  | 35  | 30  | 28  |    |  |  |    |
| 9                               | 55 | 42  | 33  | 28  | 54  | 41  | 33  | 28  | 40  | 32                    | 27  | 39  | 32  | 27  | 37  | 31  | 27  | 25  |    |  |  |    |
| 10                              | 52 | 38  | 30  | 25  | 50  | 38  | 30  | 25  | 37  | 30                    | 25  | 36  | 29  | 25  | 35  | 29  | 24  | 23  |    |  |  |    |
| RC - Ceiling Cavity Reflectance |    |     |     |     |     |     |     |     |     | RW - Wall Reflectance |     |     |     |     |     |     |     |     |    |  |  |    |

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated contol systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

| BRAND                                          | EASYFIT<br>by EnOcean                                                                       | LUTRON                                                                                                                                                                                        | enlighted                                                                                                                                                                                                                                                                                                                                          | LEVITON®                                                                                                                                                                                                                                                                              | OSRAM                                                                                                                                                                                                                                                                                            | PHILIPS<br>EasySense                                                                                                  | legrand®                                                                                                          |
|------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| CONTROL UNIT                                   | <input type="checkbox"/> LEDRU<br>LED Relay Zone<br>Controller 0-10V <sup>1</sup>           | <input type="checkbox"/> FCJS-0-10<br>Lutron Vive 0-10V Individual<br>Control Models <sup>1 4</sup>                                                                                           | <input type="checkbox"/> CU-4E-FMH<br>Fixture Mount Control<br>Unit <sup>1 5</sup>                                                                                                                                                                                                                                                                 | <input type="checkbox"/> ZL027 –NOW<br>Intellect Power Control<br>Module <sup>1 6</sup>                                                                                                                                                                                               | <input type="checkbox"/> EN-WCM2-ZB-DR<br>Wireless Control<br>Module <sup>1 7</sup>                                                                                                                                                                                                              | <input type="checkbox"/> XITANIUM<br>SR LED DRIVER<br>The Philips<br>Advance Xitanium<br>SR LED driver <sup>1 8</sup> | <input type="checkbox"/> LMFC-011<br>ON/OFF/0-10V<br>dimming fixture<br>controller <sup>1 9</sup>                 |
|                                                | <input type="checkbox"/> LEDDU<br>LED Zone Controller<br>0-10V <sup>1</sup>                 | <input type="checkbox"/> FCJS-ECO<br>Lutron Vive Eco-system<br>Individual Control Models <sup>1 4</sup>                                                                                       |                                                                                                                                                                                                                                                                                                                                                    | <input type="checkbox"/> ZL027 –DLE<br>Intellect Power Control<br>Module <sup>1 6</sup>                                                                                                                                                                                               | <input type="checkbox"/> EN- ALC-ZB-BK-DR<br>Wireless Area Lighting<br>Control Module <sup>1 7</sup>                                                                                                                                                                                             |                                                                                                                       | <input type="checkbox"/> FS-PP-V2<br>FS-PP Fixture<br>Integrated Sensor<br>Power Pack <sup>1 9</sup>              |
| INTEGRATED<br>OCCUPANCY&<br>DAYLIGHT<br>SENSOR | N/A                                                                                         | <input type="checkbox"/> DFCSJ-OEM-OCC<br>Clear Connect (RF) and<br>Occupancy/<br>Daylight Sensing <sup>2</sup>                                                                               | <input type="checkbox"/> SU-5E-IoT<br>IoT Node Micro Sensor<br><input type="checkbox"/> SU-5E-CL<br>Connected Micro Sensor<br><input type="checkbox"/> SU-5E-IL<br>Indipendent Micro Sensor<br><input type="checkbox"/> SU-5S-H(IoT/CL/IL)<br>Serface Mount Sensor<br><b>(Must be Specified with CU-<br/>4E-FMH Control Unit) <sup>2</sup></b>     | <input type="checkbox"/> ZL00J -TOW<br>Intellect Intelligent<br>Fixture Control<br>System <sup>2</sup>                                                                                                                                                                                | <input type="checkbox"/> EN-CLM-PIR-DD-ZB<br>SensiLUM™ Wireless<br>Integrated Sensor                                                                                                                                                                                                             | <input type="checkbox"/> SNS200<br>SNS200 for<br>grouping <sup>2</sup>                                                | <input type="checkbox"/> FD-301<br>Fixture integrated<br>Daylight Dimming<br>Sensor <sup>2</sup>                  |
|                                                |                                                                                             |                                                                                                                                                                                               | <input type="checkbox"/> ZL00J-DOW<br>Intellect Intelligent<br>Fixture Control<br>System <sup>2</sup>                                                                                                                                                                                                                                              | <input type="checkbox"/> ZBHA-<br>CLM-DIM-ENC<br>Connected Lighting<br>Module DIM <sup>2</sup>                                                                                                                                                                                        | <input type="checkbox"/> SNS300<br>SNS300 for<br>networks <sup>2</sup>                                                                                                                                                                                                                           | <input type="checkbox"/> FS-205<br>Fixture integrated<br>passive infrared<br>occupancy sensor <sup>2</sup>            |                                                                                                                   |
| *WIRELESS<br>OCCUPANCY<br>SENSOR               | <input type="checkbox"/> EOSCU-W-EO<br>Occupancy Sensor<br>- Ceiling Mounted <sup>3</sup>   | <input type="checkbox"/> LRF2-OCR2B-P-WH<br>Ceiling mount360°<br>,occupancy/vacancy sensor <sup>3</sup>                                                                                       | N/A                                                                                                                                                                                                                                                                                                                                                | N/A                                                                                                                                                                                                                                                                                   | <input type="checkbox"/> EN-SCPPH-<br>1500-ZB<br>Wireless Passive<br>Infrared Occupancy<br>and Photo Sensors <sup>3</sup>                                                                                                                                                                        | N/A                                                                                                                   | <input type="checkbox"/> LMDC-100<br>Dual technology<br>PIR Ceiling Mount<br>Occupancy Sensor <sup>3</sup>        |
| *WIRELESS<br>DAYLIGHT<br>SENSOR                | <input type="checkbox"/> ELLSU-W-EO<br>Light Level Sensor -<br>Ceiling Mounted <sup>3</sup> | <input type="checkbox"/> LRF2-DCRB-WH<br>Ceiling-mount daylight<br>sensor <sup>3</sup>                                                                                                        | N/A                                                                                                                                                                                                                                                                                                                                                | N/A                                                                                                                                                                                                                                                                                   | <input type="checkbox"/> EN-SCPPH-<br>1500-ZB<br>Wireless Passive<br>Infrared Occupancy<br>and Photo Sensors <sup>3</sup>                                                                                                                                                                        | N/A                                                                                                                   | <input type="checkbox"/> LMLS-400<br>Single zone switching<br>and dimming digital<br>photosensor <sup>3</sup>     |
| *WIRELESS<br>OCCUPANCY<br>& DAYLIGHT<br>SENSOR | N/A                                                                                         | N/A                                                                                                                                                                                           | <input type="checkbox"/> SU-5E-IoT<br>IoT Node Micro Sensor<br><input type="checkbox"/> SU-5E-CL<br>Connected Micro Sensor<br><input type="checkbox"/> SU-5E-IL<br>Indipendent Micro Sensor<br><input type="checkbox"/> SU-5S-H(IoT/CL/IL)<br>Serface Mount Sensor<br><br><b>(Must be specified with CU-<br/>4E-FMH Control Unit) <sup>3</sup></b> | <input type="checkbox"/> ZL00J -TOW<br>Intellect Intelligent<br>Fixture Control System<br><br><input type="checkbox"/> ZL00J-DOW<br>Intellect Intelligent<br>Fixture Control System<br><br><b>(Must be specified with<br/>ZL027-NOW and ZL00J-<br/>DOW Control unit) <sup>3</sup></b> | <input type="checkbox"/> EN-CLM-<br>PIR-DD-ZB<br>SensiLUM™ Wireless<br>Integrated Sensor<br><br><input type="checkbox"/> ZBHA-<br>CLM-DIM-ENC<br>Connected Lighting<br>Module DIM<br><br><b>(Must be specified<br/>with EN-WCM2-ZB-DR<br/>or EN- ALC-ZB-BK-DR<br/>Control Unit) <sup>3</sup></b> | <input type="checkbox"/> SNS200-CMP<br>SNS-200 for<br>Grouping <sup>3</sup>                                           | N/A                                                                                                               |
| ACCESSORIES                                    | N/A                                                                                         | N/A                                                                                                                                                                                           | <input type="checkbox"/> TMC-SU-5E<br>Tile Mount Carrier<br><input type="checkbox"/> CBL-5E-CU4-30N<br>30 inch Sensor cable for<br>CU-4 and IoT Ready<br><input type="checkbox"/> CBL-5E-CU4-7F<br>7 Foot sensor cable for<br>CU-4 and IoT Ready Driver                                                                                            | N/A                                                                                                                                                                                                                                                                                   | N/A                                                                                                                                                                                                                                                                                              | N/A                                                                                                                   | N/A                                                                                                               |
| NOTES                                          | N/A                                                                                         | 4- Luminaire will be compatible with LUTRON LRF2-OCR2B-PWH Ceiling mount 360deg occupancy/ vacancy sensor & LRF2-DCRB-WH ceiling mount daylight sensor. Sensors must be orderd through Lutron | 5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5SH, Sensors                                                                                                                                                                                                                                                      | 6- Luminaire will be compatible with LEVITON I ntellect APP & Keypad room controller                                                                                                                                                                                                  | 7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless passive infrared occupancy and photo sensor                                                                                                                                                                                       | 8- Luminaire will be compatible with philips field and wireless switch                                                | 9- Luminaire will be compatiable with DLM Room control system LMPB-100. . Sensors must be orderd through Legrand. |