




**EASY 3 COLORS
SELECTOR**
3000K • 4000K • 5000K

DIMENSIONS

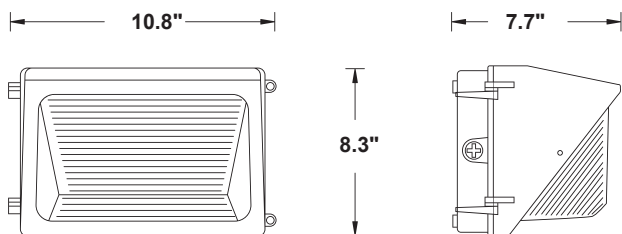

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
8000	8097	60 W
7000	7090	50 W
6000	6056	40 W
4000	4100	30 W
3000	2900	20 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

LED wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Keeping with the look of a traditional MH wall pack, while reducing energy consumption up to 80% and lasting over 60,000 hours. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications. The Adjustable Light Output and CCT feature allows the contractor to set the light output during installation, to a level perfectly suited for the job site.

LUMENS	3000/4000/6000/7000/8000
CCT	30K/40K/50K
CRI	80+ Standard
COLOR QUALITY	3 Step MacAdam Ellipse
MOUNTING	Wall Mount
DIMMING	DIM10 (0-10 dimming)
FINISH	Bronze, White
BEAM ANGLE	110°
EMERGENCY	10W - 20W
WORKING TEMPERATURE	-40°C to 50°C (-22°F to 122°F)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS

Prismatic glass lens designed for superior lighting distribution, uniformity and fixture spacing. No UV or IR in the beam. Light is soft and uniform, safe to eyes.

CONSTRUCTION

Die-cast aluminum housing with bronze polyester powder paint for lasting durability. Door is hinged on the side so door swings out of the way during installation and service. The reflector is made of die-formed specular anodized aluminum for high efficiency.

FINISH

Dark bronze corrosion-resistant polyester powder finish is standard.

Gasket

The housing is sealed with a one-piece silicone gasket that protects the optical assembly from outside contaminants.

MOUNTING

configured for wall mounting above four feet from ground. Housing is designed for mounting directly over a standard 4" outlet box (by others) or for surface wiring with 1/2" threaded conduit entry hubs.

OPTIONS & ACCESSORIES

Options and Accessories

Optional emergency battery back-up (EMG) option for emergency egress lighting

Optional photocell (PHC) detects changing light levels and saves energy by turning off during the day

MULTI LUMEN/MULTI CCT

Easily field-selectable multi-lumen and multi-CCT selector switches allow you to easily change the intensity and CCT in the field.



DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277.

WARRANTY

Five-year warranty for parts and components (labor not included).

LISTING

cULus Listed
Wet Location Listed
Dark Sky Compliant

Example:

OWP-NC-101-LED							
SERIES	LUMENS	DIMMING	VOLTAGE	CCT	Emergency	FINISH	OPTION
OWP-NC-101-LED	3000L/4000L/6000L/7000L/8000L	DIM10 - 0-10V Dimming	MVOLT 347*	30K/40K/50K	☐ EMG-LED-10W	WH - White BZ - Bronze	PHC - Photocell MS - Motion Sensor

Wall Mount Wall Pack

* Consult factory for details

Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W option. Contact the factory for details.

Remote mounted installation

* Consult Factory for Self Diagnostic

