

OWP-NC-301-LED

LED Large No Cut-Off Wall Pack Series

up to 105 Wattage / up to 12000 Lumens

Catalog Number:

Project Name:

Note:

Type:




APPLICATIONS:

This large size no cut-off LED wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Keeping with the look of a traditional MH wall pack, while reducing energy consumption up to 80% and lasting over 50,000 hours. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications.


FEATURES:

- 120-277V
- Lumen output up to 12000 lm with efficacy 121 lm/W and higher
- Polycarbonate optical lens with UV stabilizers
- Photocell optional
- Replacing 320W MH - 4000W MH
- Operating temperature is -40°C to 40°C (-40°F to 104°F)
- UL/cUL wet location listed
- DLC Listed

DIMENSION:

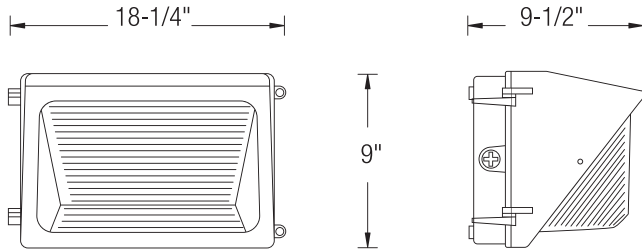

PHOTOMETRICS:

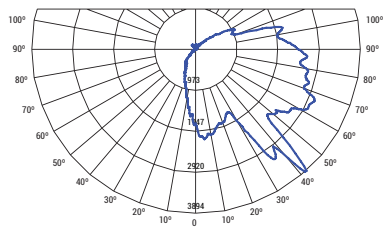

B	U	G
1	4	5

SPECIFICATIONS:

LUMENS	6000/ 9000 / 12000 lumens
WATTAGE	59W/ 87W / 105W
CCT	40K-50K
CRI	80
LIGHT EFFICIENCY	+121 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 50°C



Ordering Guide > Example: OWP-NC-301-LED-12000L-MVOLT-40K-BZ

OWP-NC-301-LED						
SERIES	PERFORMANCE	VOLTAGE	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-NC-301-LED	6000L - 6000 lumens 9000L - 9000 lumens 12000L - 12000 lumens	MVOLT - 120-277V	40K - 4000K 50K - 5000K	BZ - Bronze	O-EMG-LED	PHC - Photocell FS-P211-B - Remote Motion Sensor

** DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.




Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977


Specifications and Dimensions
subject to change without notice.

Issued-B1118-Rev. 1


TEST NO.: EL12021901

SPACING CRITERIA: **1.18**

	RC	80%				70%				50%				30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99	
	1	110	106	102	99	107	104	100	97	99	96	94	95	93	91	91	90	88	86	
	2	101	94	88	83	99	92	87	82	88	84	80	85	81	78	82	79	76	74	
	3	93	84	77	71	91	82	75	70	79	73	69	76	71	67	74	70	66	64	
	4	86	75	67	61	84	74	66	61	71	65	60	69	63	59	67	62	58	56	
	5	80	68	60	54	78	67	59	53	65	58	53	63	57	52	61	55	51	49	
	6	74	62	53	47	72	61	53	47	59	52	47	57	51	46	55	50	46	44	
	7	69	56	48	42	67	55	48	42	54	47	42	52	46	41	51	45	41	38	
	8	64	52	42	38	63	51	43	38	50	43	38	48	42	38	47	41	37	35	
	9	60	48	40	35	59	47	40	35	46	39	34	45	39	34	44	38	34	32	
10	57	44	37	32	55	44	36	32	43	36	31	42	36	31	41	35	31	29		
RC - Ceiling Cavity Reflectance					RW - Wall Reflectance															

SPACING CRITERIA: **1.26**[illegible]

SPACING CRITERIA: 1.26



ROOM CAVITY RATIO	RC	80%				70%				50%				30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
	0	115	115	115	115	111	111	111	111	103	103	103	95	95	95	88	88	88	85	
	1	102	96	91	86	98	92	88	83	85	81	78	79	75	73	73	70	68	65	
	2	92	82	75	68	88	79	72	66	73	67	62	68	63	58	62	58	55	52	
	3	83	72	63	56	79	69	61	54	64	57	51	59	53	48	54	50	46	43	
	4	76	63	54	47	72	61	52	45	56	49	43	52	46	41	48	43	39	36	
	5	70	56	47	40	67	54	45	39	50	43	37	47	40	35	43	38	34	31	
	6	64	51	41	35	61	49	40	34	45	38	32	42	36	31	39	34	29	27	
	7	60	46	37	30	57	44	36	30	41	34	29	39	32	27	36	30	26	24	
8	56	42	33	27	53	40	32	26	38	31	25	35	29	24	33	28	23	21		
9	52	38	29	24	50	37	29	24	36	29	23	32	26	22	31	25	21	19		
10	49	35	27	22	47	34	27	22	32	25	21	30	24	20	28	23	19	17		
RC - Ceiling Cavity Reflectance		RW - Wall Reflectance																		