

# OWP-NC-311-LED

LED Large No Cut-Off Wall Pack Series

up to 135 Wattage / up to 15500 Lumens

Catalog Number:

Project Name:

Note:

Type:




## APPLICATIONS:

This large size no cut-off LED wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Keeping with the look of a traditional MH wall pack, while reducing energy consumption up to 80% and lasting over 50,000 hours. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications.


## FEATURES:

- Sealed die-casting profile for outdoor applications
- 120-277V; 0-10V dimmable
- Lumen output from 10000-15500lm with efficacy up to 113lm/W
- Polycarbonate optical lens with UV stabilizers
- Photocell and Motion Sensor options available
- Optional battery back-up option for emergency egress lighting
- Replacing 400W MH - 575W MH
- Operating temperature is -40°C to 40°C (-40°F to 104°F)
- UL/cUL wet location

## DIMENSION:

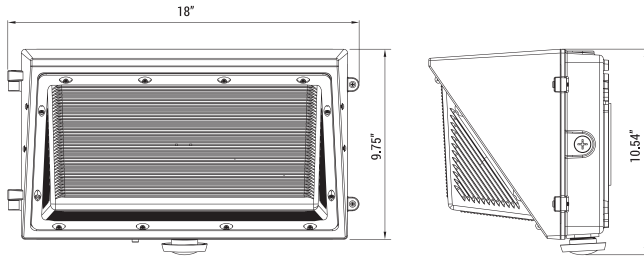

## PHOTOMETRICS:

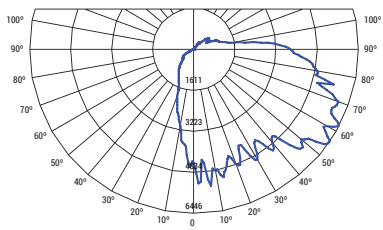

B	U	G
3	4	5

## SPECIFICATIONS:

LUMENS	10000 / 15500 lumens
WATTAGE	90W / 135W
CCT	40K-50K
CRI	70
LIGHT EFFICIENCY	110 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 40°C



Ordering Guide > Example: OWP-NC-311-LED-15500L-DIM10-MVOLT-40K-BZ

OWP-NC-311-LED							
SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-NC-311-LED	10000L - 10000 lumens 15500L - 15500 lumens	DIM10- 0-10V Dimming	MVOLT - 120-277V	40K - 4000K 50K - 5000K	BZ - Bronze	0-EMG-LED	WPPHC - Photocell WPMS - Motion Sensor FSP-311-B - 0-10V continuous dimming PIR photo/motion sensor with bluetooth control option.

\* For more options, consult factory



Submittal form is available @ [www.oraclelighting.com](http://www.oraclelighting.com)  
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions  
subject to change without notice.

Issued-B1118-Rev. 1