Recessed mount brick, step and wall light.

BODY:

Powder coated cast aluminum with 0.3% copper to prevent corrosion in concrete applications. Supplied standard with three 3/4" NPS holes located on top, side & back.

FACE PLATE:

High-grade die-cast aluminum

GASKET:

Single-piece molded silicon for wet location

Clear, heat-resistant, tempered glass

White, Black, Bronze, Green (Custom color, please consult factory)

High-performance aluminum reflector assembly for superb light output.

INSTALLATION:

Two 1/2" NPS wiring holes Feed through listed


DRIVER:

Driver included








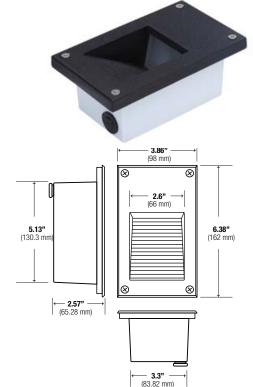

Ordering Guide > Example: ST11BX-LED-90L-12-WH



ST