

## ENLC001 6" Round Floor Box


### WARNING

#### Turn the POWER OFF at the circuit breaker before installing the Floor Box

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device. Use copper wire only, or equivalent.

#### NOTES:

10-12 AWG Stranded or Solid Copper wire is recommended.

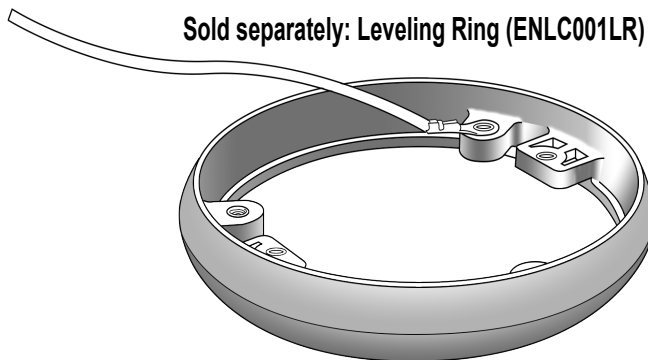


Sold separately: Leveling Ring (ENLC001LR)

Leveling ring compatible with Enerlites part number:

- 975516-SS, 975517-C, 975517-S, 975519-C, 975519-S

Sold separately: Adapter Ring (ENLC001AR)

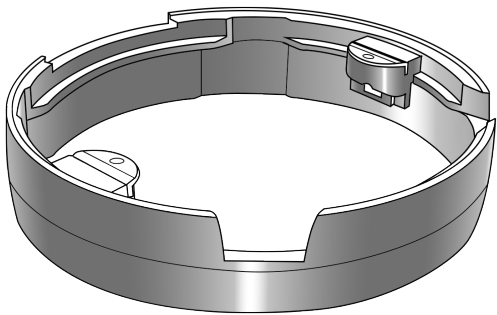

Adapter ring compatible with Enerlites part number:

- 961501-C, 961501-C-USB, 961501-C-GFCI
- 961501-S, 961501-S-USB, 961501-S-GFCI

### SPECIFICATIONS

|                                 |                 |
|---------------------------------|-----------------|
| Material.....                   | Nonmetallic PVC |
| No. of Knockouts.....           | 4               |
| Conduit, tubing or raceway..... | 3/4, and 1"     |
| Box depth.....                  | 6"              |
| Box diameter.....               | 5"              |
| Minimum concrete depth.....     | 3"              |

### DESCRIPTION/ FEATURES

Enerlites Floor box base provides a durable solution for in-floor distribution of power and communications services. It has round base and is designed to be embedded in a concrete floor with some excess length remaining above the plane of the floor. Trim out is easy – just use a handsaw to cut off box at desired height to accommodate carpet, tile, or other flooring. It measures 6.437 Inch x 6 Inch. Box comes with four 1" Inch hubs for conduit hubs termination. Floor box has sturdy PVC construction for added durability and maximum corrosion resistance. It features four reducing bushings, one polyethylene temporary pour lid and provides quick, easy, secure installations.

- Concrete tight and suitable for any on grade/below grade application
- PVC molded ports and reducer plugs included
- A wide choice of cover materials and finishes are available

### WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.