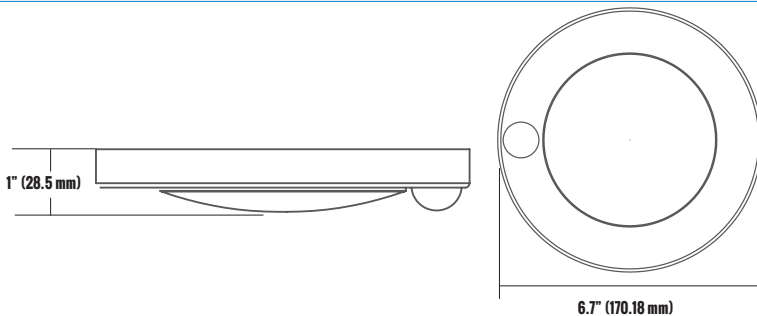


PRODUCT CODE: CL106P-110WM-PFCN
6 INCH APERTURE CLOSET LIGHT SURFACE MOUNT 3CCT


PRODUCT DESCRIPTION

The new Etlin-Daniels Low profile LED 6" Closet Light CL106P-110WM-PFCN offers the latest in compact design, energy savings, illumination, and auto on/off with the built-in and improved range PIR sensor. At only 1" in depth and 6.7" in width, and with an aluminum housing to dissipate what little heat the diode array may produce, and with its easy-to-remove frosted polycarbonate lens, the new CL106P is a perfect added size option to our 8" CL108P.

The new design with 10W and 600lm now comes with a built-in switch that allows for choosing between 3000K, 4000K and 5000K - 3CCT. Once the space is vacated, the sensor will automatically shut off the fixture after 30 seconds.

The new CL106P design is the perfect solution to illuminate closets, garbage rooms, small storage rooms, washrooms, basements, small garages - anywhere a typical fixture may be left on when the space is vacated.

FEATURES

- LED Indoor Light Source
- Surface Mount low profile housing
- Durable aluminum body with frosted polycarbonate lens
- 3CCT - choose between 3000K, 4000K and 5000K
- 120° beam spread
- Wet location rated
- Keyless slot mounting to j-box
- PIR Sensor built-in - 30 seconds to off once space is vacated
- 5 year warranty
- L70 - 50,000 hours
- Energy Star Certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	CRI	VOLTAGE	POWER FREQ.
3000K = 60.43LM/W 4000K = 65.59LM/W 5000K = 59.65LM/W	3000K = 604.35 LM 4000K = 655.9 LM 5000K = 596.5 LM	CHANGEABLE: 3000K / 4000K / 5000K	>80CRI	120VAC	60HZ

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	PRODUCT DIMENSIONS	CARTON SIZE	
10W	PC PLASTIC / METAL	>50,000 HOURS	6.7 X 6.7 X 1 INCHES (112.5 X 112.5 X 28.5 MM)	7.1 X 7.1 X 1.37 INCHES (182 X 182 X 35 MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

CEILING MOUNT

FIXTURE COLOR/DIFFUSER

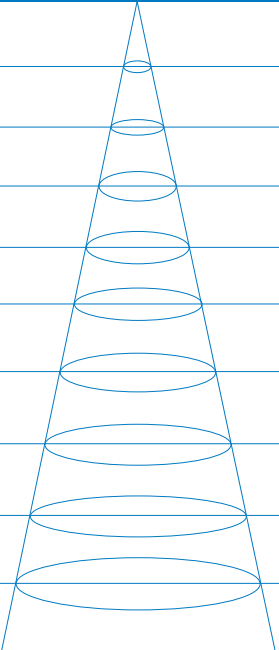
WHITE MATTE / FROSTED

CONTROL TYPE

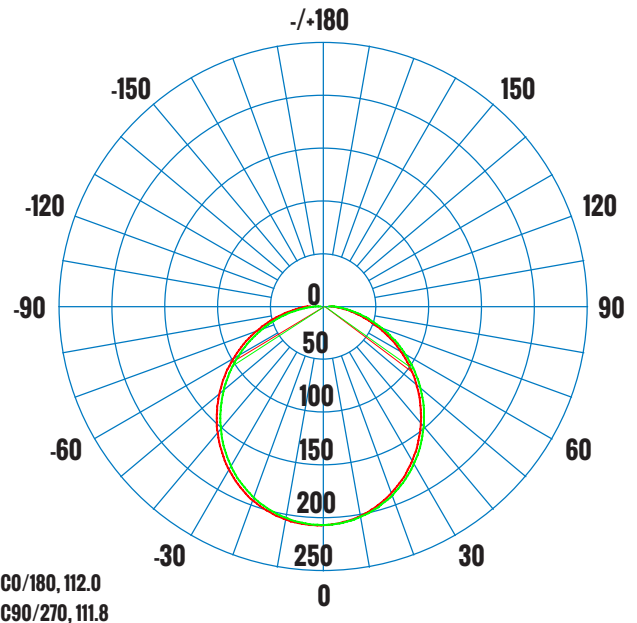
NON-DIMMABLE
PIR SENSOR

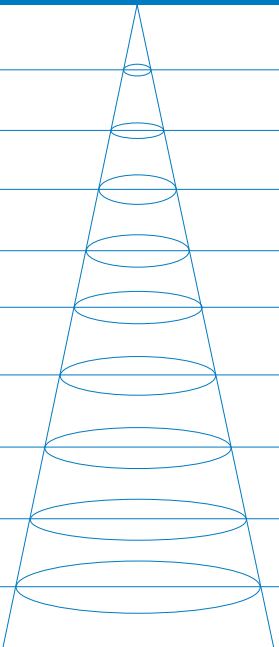
PRODUCT CODE: CL106P-110WM-PFCN
6 INCH APERTURE CLOSET LIGHT SURFACE MOUNT 3CCT

LUMINAIRE PHOTOMETRIC (TEST REPORT) - 3000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 427.5LM

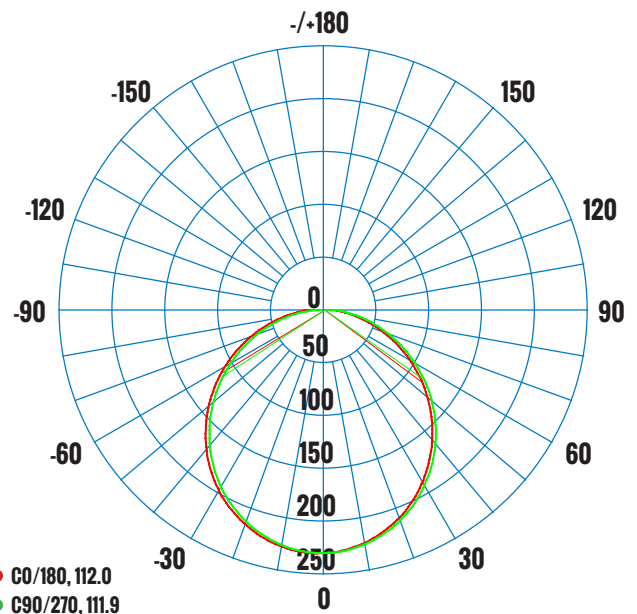
3.28FT 1M	61.91, 209.4 LX		9.60FT 292.80CM
6.56FT 2M	15.48, 52.36 LX		19.21FT 585.60CM
9.84FT 3M	6.879, 23.27 LX		28.82FT 878.41CM
13.12FT 4M	3.869, 13.09 LX		34.52FT 1171.21CM
16.40FT 5M	2.476, 8.377 LX		38.43FT 1464.01CM
19.69FT 6M	1.720, 5.817 LX		57.64FT 1756.81CM
22.97FT 7M	1.264, 4.274 LX		67.24FT 2049.61CM
26.25FT 8M	0.9674, 3.272 LX		76.85FT 2342.42CM
29.52FT 9M	0.7643, 2.585 LX		86.46FT 2635.22CM
32.80FT 10M	0.6191, 2.094 LX		96.03FT 2928.02CM

HT	EAVG/EMAX	ANGLE: 111.33 DEG	DIA
----	-----------	-------------------	-----

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 111.9DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 4000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 464.1LM

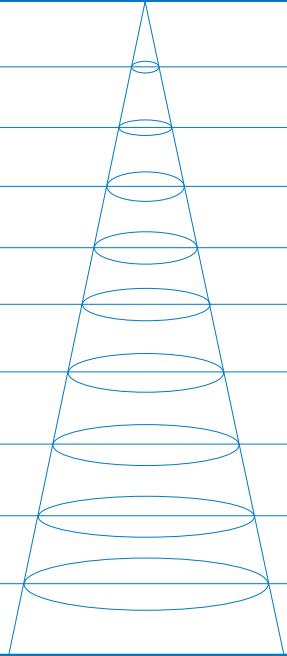
3.28FT 1M	67.21, 226.1 LX		9.69FT 295.40CM
6.56FT 2M	16.80, 56.52 LX		19.38FT 590.79CM
9.84FT 3M	7.467, 25.12 LX		29.07FT 886.19 CM
13.12FT 4M	4.200, 14.13 LX		38.76FT 1181.58 CM
16.40FT 5M	2.688, 9.044 LX		48.45FT 1476.98 CM
19.69FT 6M	1.867, 6.280 LX		58.15FT 1772.37 CM
22.97FT 7M	1.372, 4.614 LX		67.84FT 2067.77 CM
26.25FT 8M	1.050, 3.533 LX		77.53FT 2363.16 CM
29.52FT 9M	1.8297, 2.791 LX		87.22FT 2658.56 CM
32.80FT 10M	0.6721, 2.261 LX		96.92FT 2953.96 CM

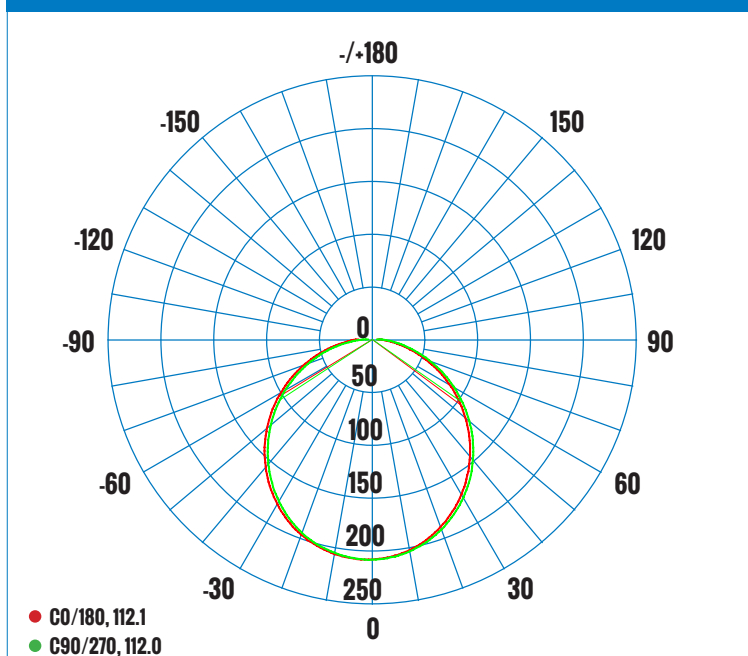
HT	EAVG/EMAX	ANGLE: 111.80DEG	DIA
----	-----------	------------------	-----

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 111.9 DEG

PRODUCT CODE: CL106P-110WM-PFCN
6 INCH APERTURE CLOSET LIGHT SURFACE MOUNT 3CCT

LUMINAIRE PHOTOMETRIC (TEST REPORT) - 5000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 422.0LM

3.28FT 1M	61.12, 205.4 LX		9.71FT 296.17CM
6.56FT 2M	15.28, 51.36 LX		19.43FT 592.35CM
9.84FT 3M	6.791, 22.83 LX		29.15FT 888.52CM
13.12FT 4M	3.820, 12.84 LX		36.87FT 1184.70CM
16.40FT 5M	2.445, 8.217 LX		48.59FT 1480.87CM
19.69FT 6M	1.698, 5.706 LX		51.79FT 1777.05CM
22.97FT 7M	1.247, 4.192 LX		58.30FT 2073.22CM
26.25FT 8M	0.9549, 3.210 LX		77.74FT 2369.39CM
29.52FT 9M	0.7545, 2.536 LX		87.45FT 2665.57CM
32.80FT 10M	0.6112, 2.054 LX		97.17FT 2961.74CM
HT	EAVG/EMAX	ANGLE: 111.94 DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 112.0DEG
CERTIFICATIONS

CAN ICES-005 (B) / NMB-005 (B)
CONTROL

ORDERING INFORMATION - CL SERIES

SERIES	SIZE	CONTROL TYPE	VOLTAGE	WATTAGE	FINISH	DIFFUSER	COLOR TEMPERATURE	DIMMABLE
E.G. CL10	6	P	1	10	WM	PF	C	N
CL10 - CLOSET LIGHT	6 - 6 INCH	P - PIR SENSOR	1-120V	10-10W	WH-WHITE MATTE	PF - PC FROSTED	C =	N = NO
							COLOR CHANGEABLE:	
							3000K/4000K/5000K	

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com