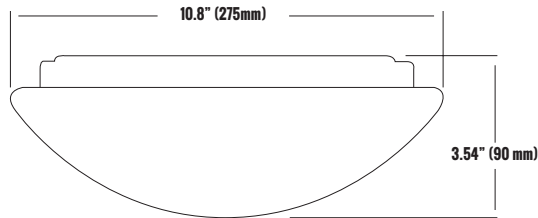


PRODUCT CODE: CM211D-1515CD -WH
5CCT LED FLUSHMOUNT/11 INCH ROUND PUFF/SLIM PROFILE


PRODUCT DESCRIPTION

The new Etlin-Daniels CM211D-1515CD and CM214D-2515CD LED Ceiling Flushmount fixtures offer the latest in compact and light weight design, even illumination, energy efficiency and value. These easy to install luminaires feature a 5CCT switch, providing 2700K / 3000K / 3500K / 4000K and 5000K options. These new color selectable fixtures provide a cost efficient solution to either replace older incandescent or compact fluorescent ceiling fixtures, or for new construction projects.

Applications include a wide range of residential, commercial, hospitality and healthcare facilities. The driver on board technology (DOB) is Triac Dimmable. Available in 11" and 14".

FEATURES

- LED Indoor Light Source.
- Low profile design.
- Durable polystyrene lens is removable for both installation and servicing
- 5CCT Switch - 2700K / 3000K / 3500K / 4000K / 5000K
- DOB technology.
- Triac Dimmable.
- Suitable for damp locations
- 5 year warranty
- L70 - 50,000 hours
- Energy Star certified


PRODUCT SPECIFICATIONS (OPTICAL DATA)

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	POWER FACTOR	HARMONIC DISTORTION
OSRAM 2835	60 CHIPS	15W - 2700K - 1353 LM / 3000K - 1395 LM / 3500K - 1350 LM 4000K - 1487 LM / 5000K - 1446 LM			90 - 96.4 LM / W	>80 CRI	>0.90	<40%

PRODUCT SPECIFICATIONS

BEAM ANGLE	VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
120°	AC 120V	50-60HZ	STEEL/PS	>50,000 HOURS	-20°C ~ -45°C -4°F ~ -49°F	-20°C ~ -45°C -4°F ~ -49°F	11 x 3.54 INCHES (275 x 90 MM)	11.8 X 11.8 X 3.93 INCHES (300 X 300 X 100 MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD

FLUSH MOUNT - CEILING MOUNT

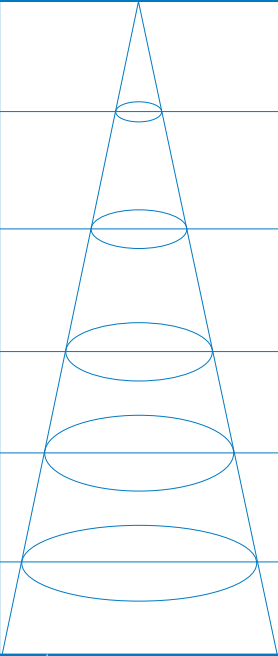
FIXTURE COLOR

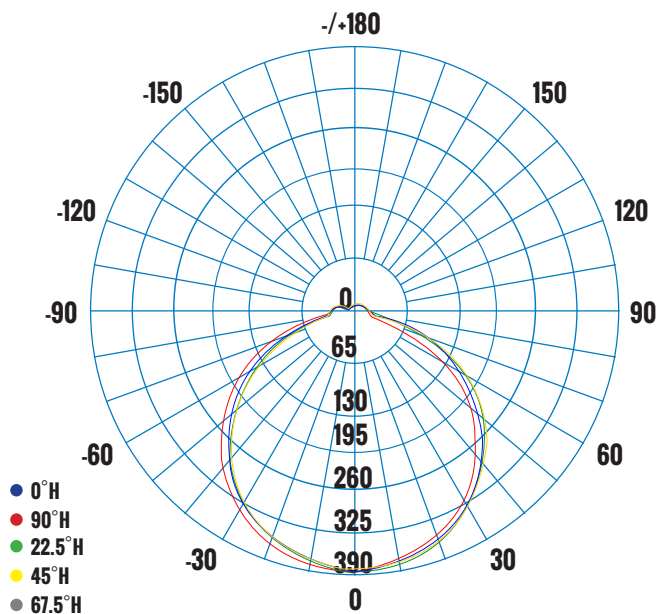
WHITE POLYSTYRENE

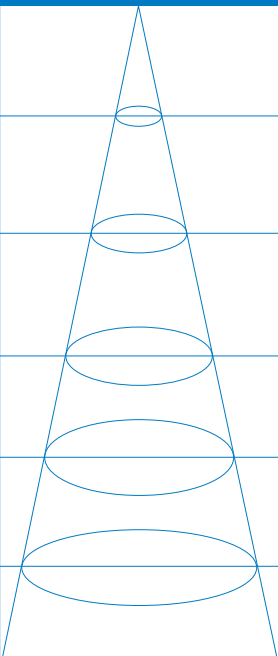
CONTROL TYPE

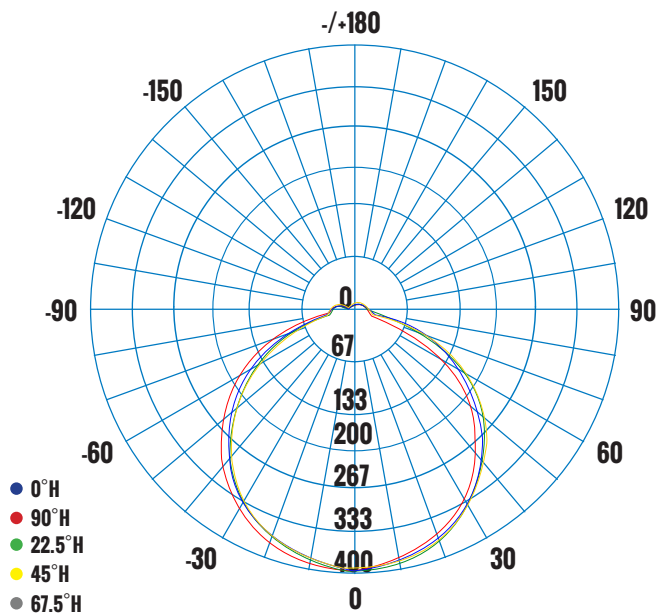
TRIAC DIMMABLE

PRODUCT CODE: CM211D-1515CD -WH
5CCT LED FLUSHMOUNT/11 INCH ROUND PUFF/SLIM PROFILE
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 15W 2700K

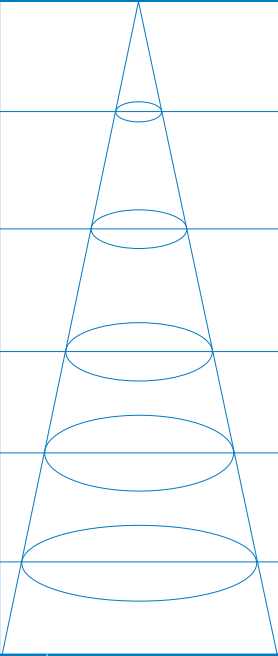
ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	12.03FC		18.8FT	18.9FT
11.3FT 3.44M	3.01FC		37.6FT	37.7FT
17.0FT 5.18M	1.34FC		56.4FT	56.6FT
22.7FT 6.92M	0.75FC		75.2FT	75.5FT
28.3FT 8.63M	0.48FC		94.0FT	94.4FT
34.0FT 10.36M	0.33FC		112.8FT	113.2FT
HT	EAVG/EMAX	VERT SPREAD: 117.8DEG HORI SPREAD: 118.0DEG		DIA

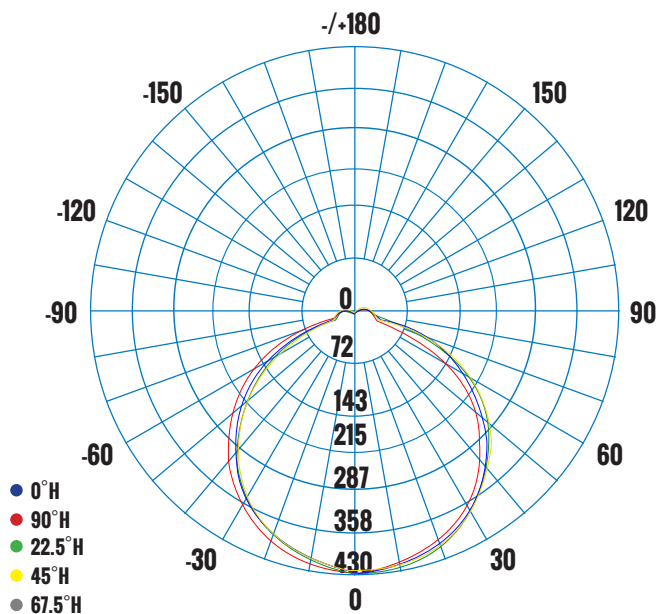
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 889.3
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 15W 3000K

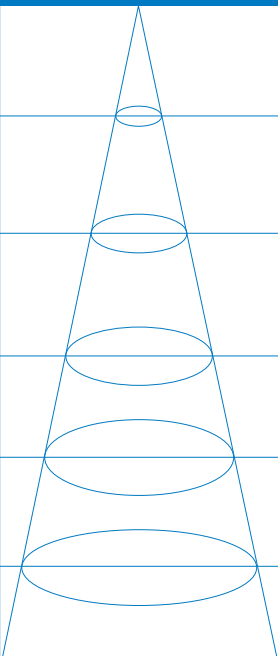
ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	12.37FC		19.8FT	19.8FT
11.3FT 3.44M	3.09FC		39.7FT	39.6FT
17.0FT 5.18M	1.37FC		59.5FT	59.5FT
22.7FT 6.92M	0.77FC		79.4FT	79.3FT
28.3FT 8.63M	0.49FC		99.2FT	99.1FT
34.0FT 10.36M	0.34FC		119.1FT	118.9FT
HT	EAVG/EMAX	VERT SPREAD: 120.5DEG HORI SPREAD: 120.5DEG		DIA

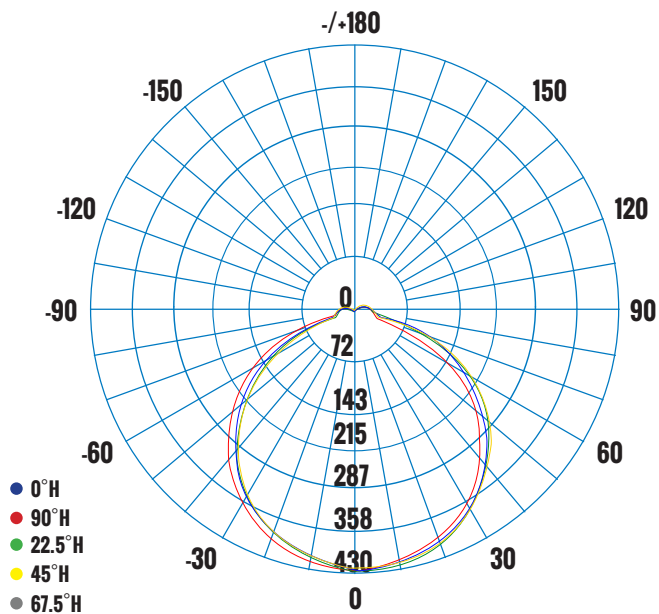
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 950.4

PRODUCT CODE: CM211D-1515CD -WH
5CCT LED FLUSHMOUNT/11 INCH ROUND PUFF/SLIM PROFILE
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 15W 3500K

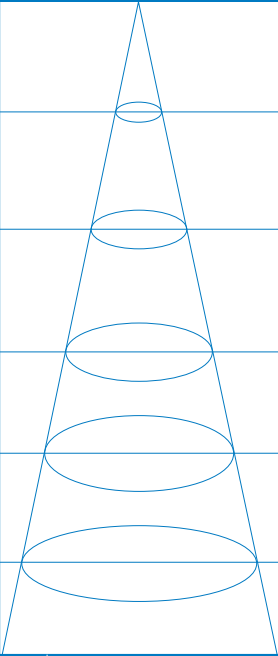
ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	13.10FC		19.8FT	19.8FT
11.3FT 3.44M	3.27FC		39.7FT	39.6FT
17.0FT 5.18M	1.46FC		59.5FT	59.4FT
22.7FT 6.92M	0.82FC		79.3FT	79.2FT
28.3FT 8.63M	0.52FC		99.2FT	98.9FT
34.0FT 10.36M	0.36FC		119.0FT	118.7FT
HT	EAVG/EMAX	VERT SPREAD: 120.5DEG HORI SPREAD: 120.4DEG	DIA	

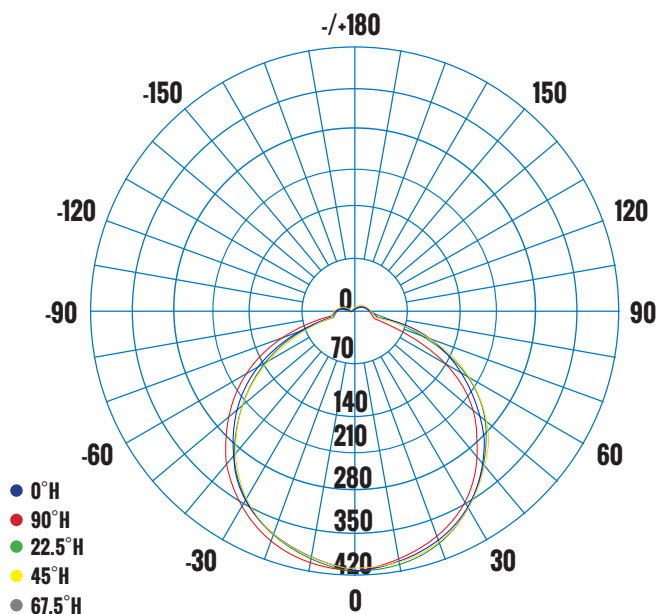
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 1,005.7
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 15W 4000K


ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	13.20FC		19.8FT	19.8FT
11.3FT 3.44M	3.49FC		39.6FT	39.6FT
17.0FT 5.18M	1.47FC		59.4FT	59.4FT
22.7FT 6.92M	0.82FC		79.2FT	79.3FT
28.3FT 8.63M	0.53FC		99.0FT	99.1FT
34.0FT 10.36M	0.37FC		118.8FT	116.9FT
HT	EAVG/EMAX	VERT SPREAD: 120.5DEG HORI SPREAD: 120.4DEG	DIA	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 1,013.7

PRODUCT CODE: CM211D-1515CD -WH
5CCT LED FLUSHMOUNT/11 INCH ROUND PUFF/SLIM PROFILE
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 15W 5000K

ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
5.7FT 1.73M	12.85FC		19.9FT	19.8FT
11.3FT 3.44M	3.21FC		39.8FT	39.6FT
17.0FT 5.18M	1.43FC		59.7FT	59.4FT
22.7FT 6.92M	0.80FC		79.6FT	79.2FT
28.3FT 8.63M	0.51FC		99.5FT	99.0FT
34.0FT 10.36M	0.36FC		119.4FT	118.8FT
HT	EAVG/EMAX	VERT SPREAD: 120.7DEG HORI SPREAD: 120.4DEG	DIA	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 985.1
CERTIFICATIONS

CAN ICES-005 (B) / NMB-005 (B)
DRIVER/LED CHIP

OSRAM
ORDERING INFORMATION - CM SERIES

SERIES	SIZE	LED TYPE	WATTAGE	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. CM2	11	D	15	1	5C	D	WH
CM2- CEILING MOUNT	11 - 11"	D - DRIVER ON BOARD	15 - 15W	1 - 120V	5C - 5CCT	D - TRIAC	WH - WHITE
					2700K/ 3000K/ 3500K/ 4000K/		
					5000K		

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com