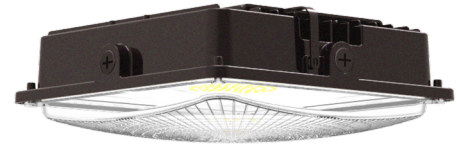
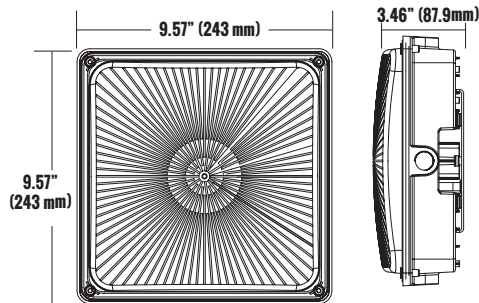


PRODUCT CODE: CNM-456075-WCP-DB
45W / 60W / 75W MULTI WATTAGE & 3CCT SLIM LED CANOPY


PRODUCT DESCRIPTION

The new Etlin-Daniels LED Garage / Canopy CNM-456075-WCP-DB fixture offers the latest in ease of installation, energy savings and product flexibility. Available in 120-347V, Wet Location rated, and with 3CCT and 3 Multi-Wattage switching, this new generation provides an excellent choice for lighting hallways, tunnels, building entrances and canopies, storage areas and both underground and above ground parking facilities.

The low-profile design is a compliment to any application, and the new CNM can be either pendant mounted or surface mounted with j-box. Equipped with a built-in photocell, this model will provide significant energy savings over HID canopy fixtures. And for extra savings, take advantage of the 0-10V Continuous Dimming.

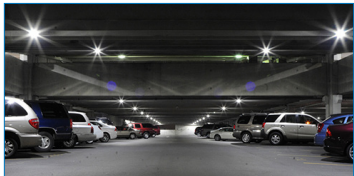
FEATURES

- LED Indoor / Outdoor Light Source.
- Low profile design with durable powder coat finish.
- Polycarbonate lens provides even illumination.
- 120-347V
- 3CCT - 3000K, 4000K, 5000K
- 3 Wattage Selectable - 45W, 60W, 75W.
- Built-in photocell.
- 4Kv surge protection.
- Fixtures can be surface or pendant mounted.
- IP65 Wet Location Rated
- 0-10V Continuous Dimming
- 5 year warranty
- L70 - 50,000 hours.
- DLC Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	WATTAGE	COLOR TEMPERATURE	LUMENS	SYSTEM EFFICACY	CRI	SYSTEM EFFICIENCY	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILED	216 CHIPS	45W - 3000K - 5662 LM / 4000K - 5994 LM / 5000K - 5852 LM 60W - 3000K - 7383 LM / 4000K - 7941 LM / 5000K - 7115 LM 75W - 3000K - 8975 LM / 4000K - 9628 LM / 5000K - 9195 LM			118 - 133 LM / W	>70 CRI	87%	>88%	>0.90	<20%

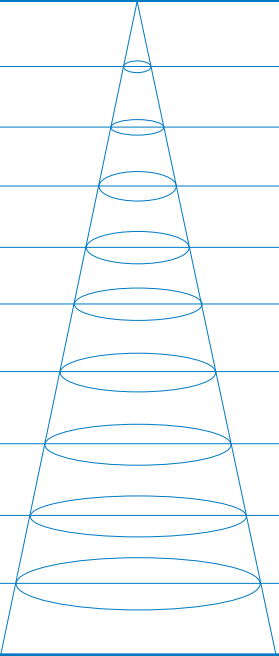
PRODUCT SPECIFICATIONS

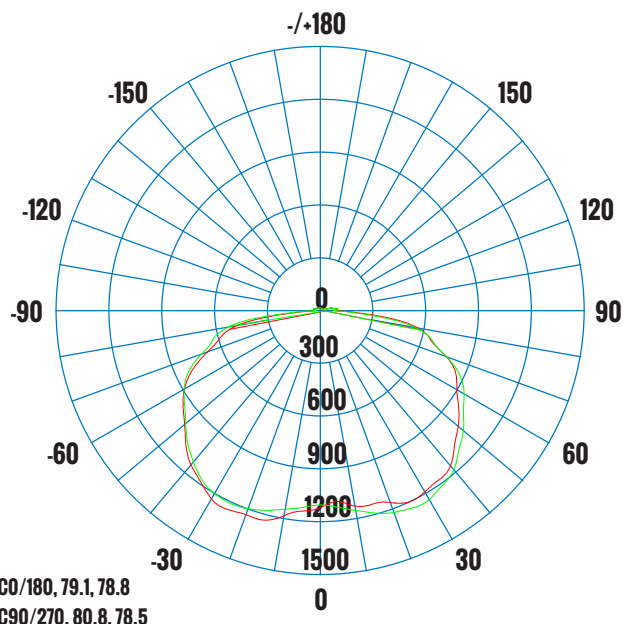
VOLTAGES	POWER FREQ.	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
120 - 347V	50-60HZ	ADC12 ALUMINUM / POLYCARBONATE OPTICAL LENS INCLUDED	IP66	>50,000 HOURS	-40°C ~ -70°C -40°F ~ -158°F	-40°C ~ -50°C -40°F ~ -122°F	9.57 X 9.57 X 3.46 INCHES (243 X 243 X 87.9 MM)	10.23 X 9.84 X 3.54 INCHES (260 X 250 X 90 MM)	

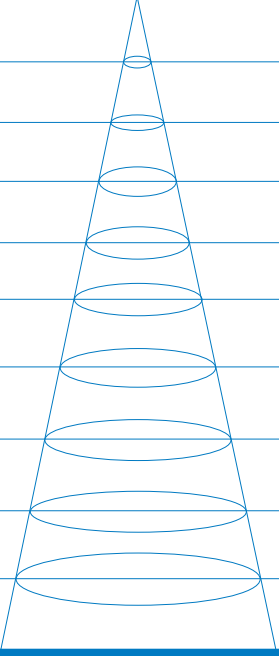
ADDITIONAL INFORMATION

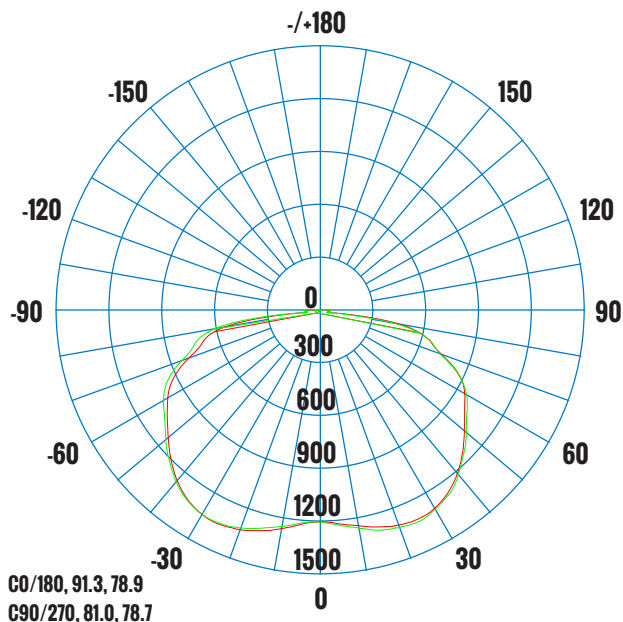
INSTALLATION METHOD
**PENDANT MOUNTNG/
FLUSH MOUNTNG**
FIXTURE COLOR
DARK BRONZE
OPTIONAL ACCESSORIES
PHOTOCELL

PRODUCT CODE: CNM-456075-WCP-DB
45W / 60W / 75W MULTI WATTAGE & 3CCT SLIM LED CANOPY
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 45W 3000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 5642 LM

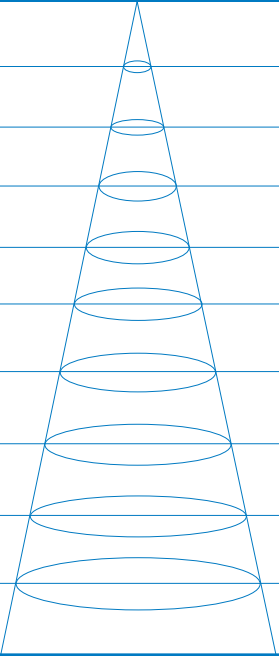
3.28FT 1M	44.91, 1231 LX		39.45FT 1202.52CM
6.56FT 2M	11.23, 307.7 LX		78.90 FT 2405.04CM
9.84FT 3M	4.990, 136.7 LX		118.35FT 3607.57CM
13.12FT 4M	2.807, 76.92 LX		157.81FT 4810.09CM
16.40FT 5M	1.796, 49.23 LX		197.26FT 6012.61 CM
19.69FT 6M	1.248, 34.19 LX		236.72FT 7215.13 CM
22.97FT 7M	0.9166, 25.12 LX		276.17FT 8417.66 CM
26.25FT 8M	0.7017, 19.23 LX		315.62 FT 9620.18 CM
29.52FT 9M	0.5545, 15.19 LX		355.07FT 10822.70 CM
32.80FT 10M	0.4491, 12.31 LX		394.52FT 12025.22CM
HT	EAVG/EMAX	ANGLE: 161.11 DEG	DIA

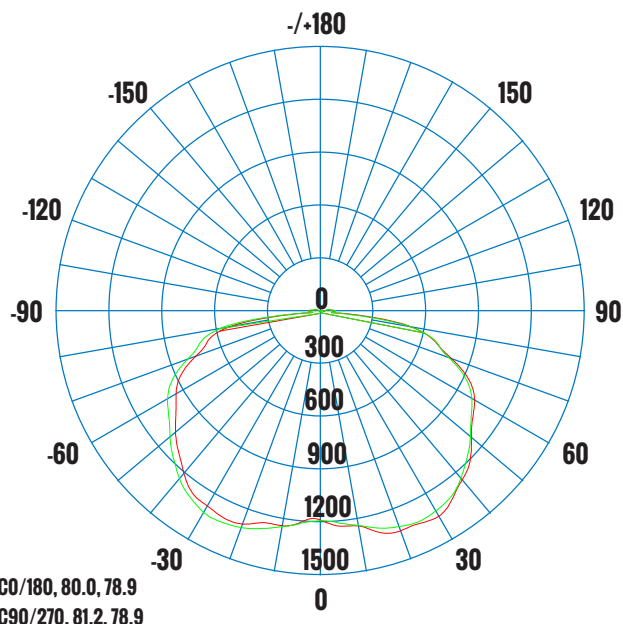
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 158.6 DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 45W 4000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 6060 LM

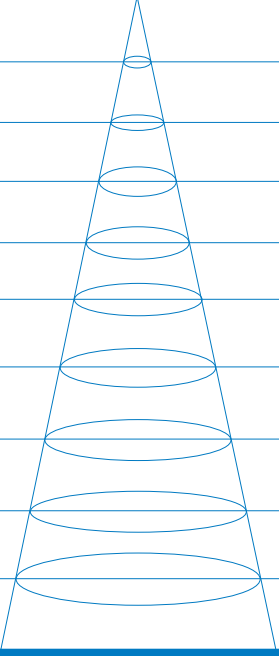
3.28FT 1M	48.39, 1300 LX		40.93FT 1247.56 CM
6.56FT 2M	12.10, 324.9 LX		81.86 FT 2495.12 CM
9.84FT 3M	5.376, 144.4 LX		122.79FT 3742.68 CM
13.12FT 4M	3.024, 81.23 LX		163.72FT 4990.24 CM
16.40FT 5M	1.935, 26.52 LX		204.65FT 6237.80 CM
19.69FT 6M	1.344, 36.10 LX		245.58FT 7485.36 CM
22.97FT 7M	0.9875, 26.52 LX		286.51FT 8732.92 CM
26.25FT 8M	0.7561, 20.31 LX		327.44 FT 9980.48 CM
29.52FT 9M	0.5974, 16.04 LX		368.37FT 11228.04 CM
32.80FT 10M	0.4839, 13.00 LX		409.30FT 12475.60CM
HT	EAVG/EMAX	ANGLE: 161.78 DEG	DIA

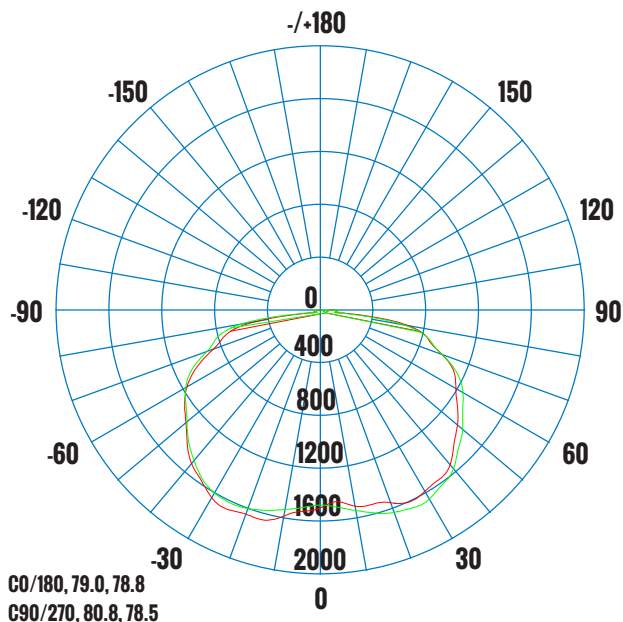
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 159.1 DEG

PRODUCT CODE: CNM-456075-WCP-DB
45W / 60W / 75W MULTI WATTAGE & 3CCT SLIM LED CANOPY
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 45W 5000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 5949 LM

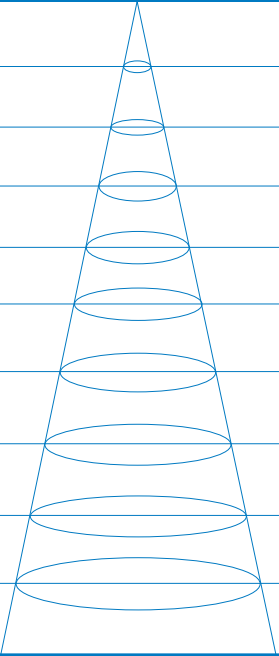
3.28FT 1M	47.50, 1295 LX		41.08FT 1252.12CM
6.56FT 2M	11.87, 323.8 LX		82.16 FT 2504.25CM
9.84FT 3M	5.278, 143.9 LX		123.24FT 3756.37CM
13.12FT 4M	2.969, 80.95 LX		164.32FT 5008.50CM
16.40FT 5M	1.900, 51.81 LX		205.40FT 6260.62CM
19.69FT 6M	1.319, 35.98 LX		246.48FT 7512.75CM
22.97FT 7M	0.9694, 26.43 LX		287.56FT 8764.87CM
26.25FT 8M	0.7422, 20.24 LX		328.64 FT 10016.99CM
29.52FT 9M	0.5864, 15.99 LX		369.72FT 11269.12CM
32.80FT 10M	0.4750, 12.95 LX		410.80FT 12521.24CM
HT	EAVG/EMAX	ANGLE: 161.85 DEG	DIA

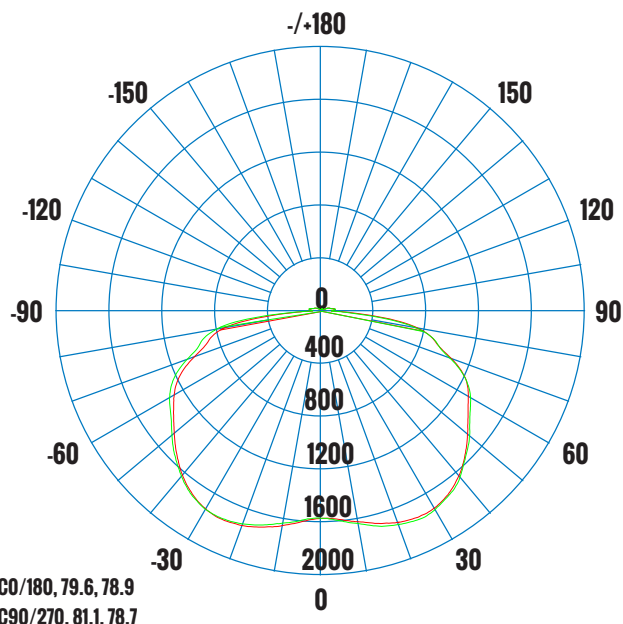
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 159.5 DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 60W 3000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 7339 LM

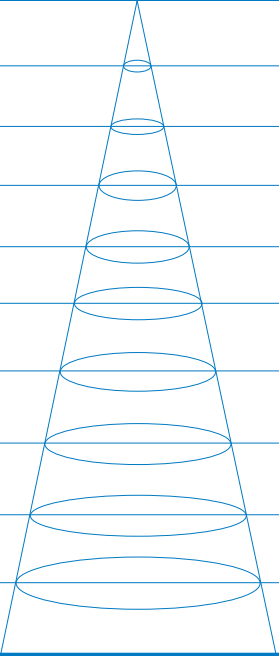
3.28FT 1M	48.39, 1300 LX		39.56FT 1205.77 CM
6.56FT 2M	12.10, 324.9 LX		79.12 FT 2411.55 CM
9.84FT 3M	5.376, 144.4 LX		118.68FT 3617.32 CM
13.12FT 4M	3.024, 81.23 LX		158.24FT 4823.09 CM
16.40FT 5M	1.935, 26.52 LX		197.80FT 6028.87 CM
19.69FT 6M	1.344, 36.10 LX		237.36FT 7234.64 CM
22.97FT 7M	0.9875, 26.52 LX		276.92FT 8440.41 CM
26.25FT 8M	0.7561, 20.31 LX		316.47 FT 9646.18 CM
29.52FT 9M	0.5974, 16.04 LX		356.04FT 10851.96 CM
32.80FT 10M	0.4839, 13.00 LX		395.59 FT 12057.73 CM
HT	EAVG/EMAX	ANGLE: 161.16 DEG	DIA

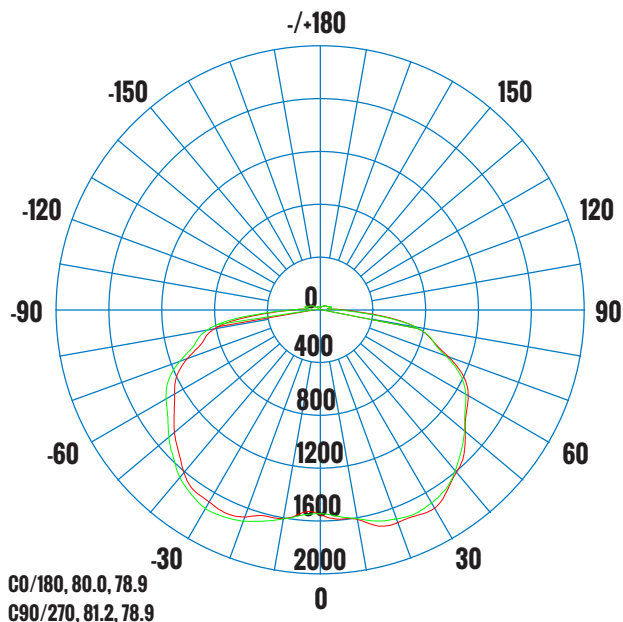
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 158.6 DEG

PRODUCT CODE: CNM-456075-WCP-DB
45W / 60W / 75W MULTI WATTAGE SLIM LED CANOPY
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 60W 4000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 8018 LM

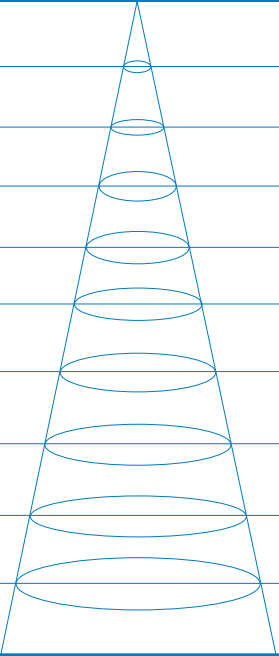
3.28FT 1M	64.03, 1720 LX		40.86FT 1245.47CM
6.56FT 2M	16.01, 429.9 LX		81.72 FT 2490.95CM
9.84FT 3M	7.114, 191.1 LX		122.58FT 3736.42CM
13.12FT 4M	4.002, 107.5 LX		163.45FT 4981.89CM
16.40FT 5M	2.561, 68.78 LX		204.31 FT 6227.36CM
19.69FT 6M	1.779, 35.09 LX		245.17 FT 7472.84CM
22.97FT 7M	1.307, 35.09 LX		286.03 FT 8718.31CM
26.25FT 8M	1.000, 26.87 LX		326.89 FT 9963.78CM
29.52FT 9M	0.7904, 21.23 LX		367.75 FT 11209.26CM
32.80FT 10M	0.6403, 17.20 LX		408.62 FT 12454.73CM
HT	EAVG/EMAX	ANGLE: 161.75 DEG	DIA

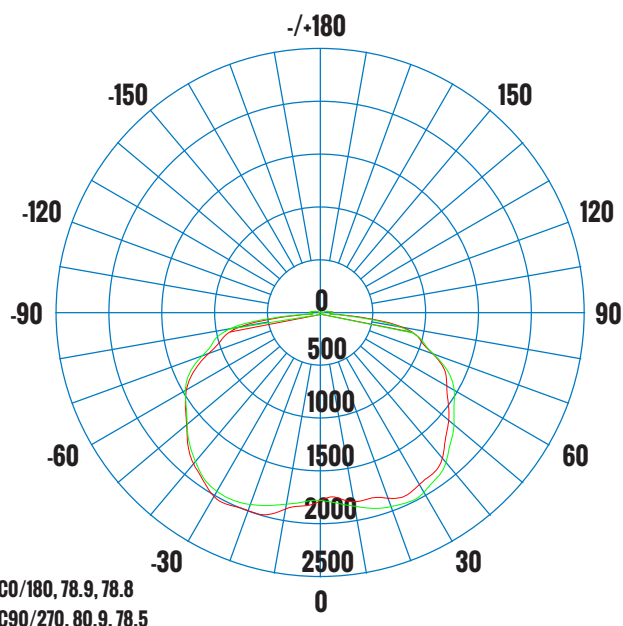
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 159.1 DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 60W 5000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 7741 LM

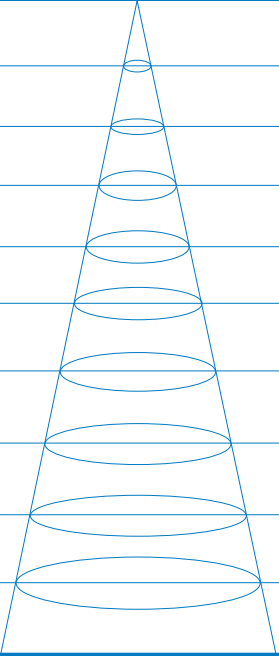
3.28FT 1M	61.81, 1685 LX		41.10FT 1252.83 CM
6.56FT 2M	15.45, 421.2 LX		82.20 FT 2505.65 CM
9.84FT 3M	6.868, 187.2 LX		123.31FT 3758.48 CM
13.12FT 4M	3.863, 105.3 LX		164.41FT 5011.30 CM
16.40FT 5M	2.472, 67.39 LX		205.51FT 6264.13 CM
19.69FT 6M	1.717, 46.80 LX		246.62FT 7516.96 CM
22.97FT 7M	1.261, 34.38 LX		287.72FT 8769.78 CM
26.25FT 8M	0.9658, 26.32 LX		328.82 FT 10022.61 CM
29.52FT 9M	0.7631, 20.80 LX		369.93FT 11275.43 CM
32.80FT 10M	0.6181, 16.85 LX		411.03FT 12528.26 CM
HT	EAVG/EMAX	ANGLE: 161.86 DEG	DIA

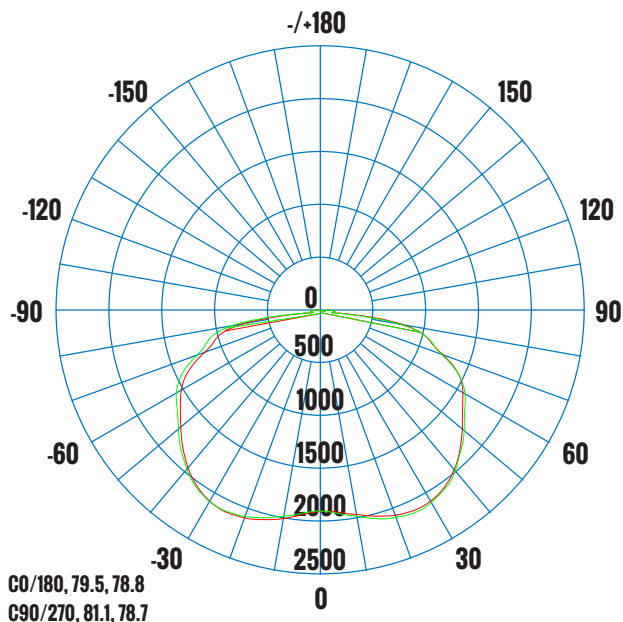
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 159.5 DEG

PRODUCT CODE: CNM-456075-WCP-DB
45W / 60W / 75W MULTI WATTAGE SLIM LED CANOPY
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 75W 3000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 8817 LM

3.28FT 1M	70.40, 1914 LX		39.56 FT 1205.77CM
6.56FT 2M	17.60, 478.6 LX		79.11 FT 2411.55CM
9.84FT 3M	7.822, 212.7 LX		118.68FT 3617.32CM
13.12FT 4M	4.400, 119.6 LX		158.24FT 4823.09CM
16.40FT 5M	2.816, 76.58 LX		197.79FT 6028.87CM
19.69FT 6M	1.956, 53.18 LX		237.35FT 7234.64CM
22.97FT 7M	1.437, 39.07 LX		276.92FT 8440.41CM
26.25FT 8M	1.100, 29.91 LX		316.48 FT 9646.18CM
29.52FT 9M	0.8692, 23.63 LX		356.00FT 10851.96CM
32.80FT 10M	0.7040, 19.14 LX		395.59FT 12057.73CM
HT	EAVG/EMAX	ANGLE: 161.75 DEG	DIA

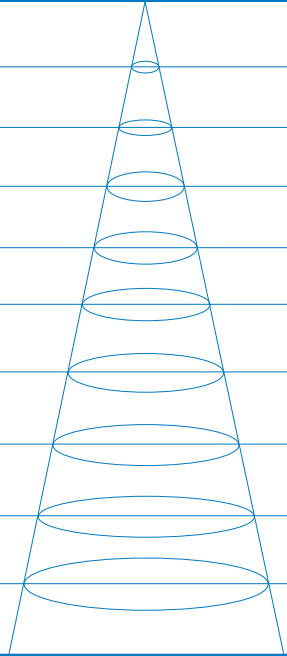
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 158.5 DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 75W 4000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 9563 LM

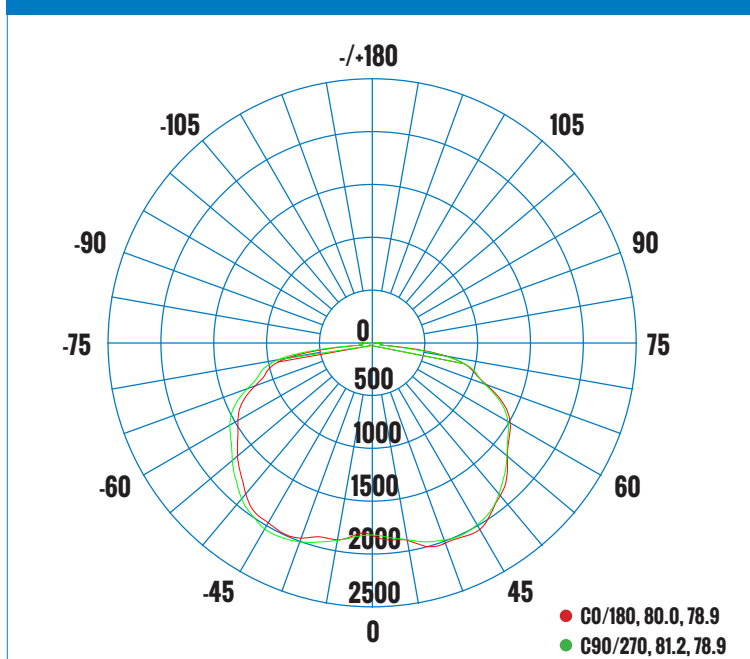
3.28FT 1M	76.36, 2040 LX		40.88FT 1246.17 CM
6.56FT 2M	19.09, 509.9 LX		81.77 FT 2492.33 CM
9.84FT 3M	8.484, 226.6 LX		122.65FT 3738.50 CM
13.12FT 4M	4.772, 127.5 LX		163.53FT 4984.67 CM
16.40FT 5M	3.054, 81.59 LX		204.42FT 6230.84 CM
19.69FT 6M	2.121, 56.66 LX		245.30 FT 7477.00 CM
22.97FT 7M	1.558, 41.63 LX		286.19 FT 8723.17 CM
26.25FT 8M	1.193, 31.87 LX		327.07 FT 9969.34 CM
29.52FT 9M	0.9427, 25.18 LX		367.96FT 11215.50 CM
32.80FT 10M	0.7636, 20.40 LX		408.85FT 12461.67 CM
HT	EAVG/EMAX	ANGLE: 161.76 DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 159.1 DEG

PRODUCT CODE: CNM-456075-WCP-DB
45W / 60W / 75W MULTI WATTAGE SLIM LED CANOPY

LUMINAIRE PHOTOMETRIC (TEST REPORT) - 75W 5000K
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 9139 LM

3.28FT 1M	72.98, 1976 LX		41.13FT 1253.53CM
6.56FT 2M	18.24, 494.1 LX		82.25 FT 2507.06CM
9.84FT 3M	8.108, 219.6 LX		123.37FT 3760.59CM
13.12FT 4M	4.561, 123.5 LX		164.50FT 5014.12CM
16.40FT 5M	2.919, 79.05 LX		205.63FT 6267.65CM
19.69FT 6M	2.027, 54.90 LX		246.75FT 7521.18CM
22.97FT 7M	1.489, 40.33 LX		287.88FT 8774.70CM
26.25FT 8M	1.140, 30.88 LX		329 FT 10028.23CM
29.52FT 9M	0.9009, 24.40 LX		370.11FT 11281.76CM
32.80FT 10M	0.7298, 19.76 LX		411.26FT 12535.29CM
HT	EAVG/EMAX	ANGLE: 161.87 DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 159.5DEG
CERTIFICATIONS

CAN ICES-005 (B) / NMB-005 (B)
DRIVER/LED CHIP
LUMILEDS
ORDERING INFORMATION - CNM SERIES

SERIES	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	CONTROLS	FINISH
E.G. CN	M	456075	W	C	P	DB
CN - CANOPY	M - MEDIUM	45 - 45W	W - 120-347V	C - CHANGEABLE COLOR TEMPERATURE -	P - PHOTOCELL	DB - DARK BRONZE
		60 - 60W		3000K / 4000K / 5000K		
		75 - 75W				

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · **Tel:** 416.741.7336 · **Fax:** 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com