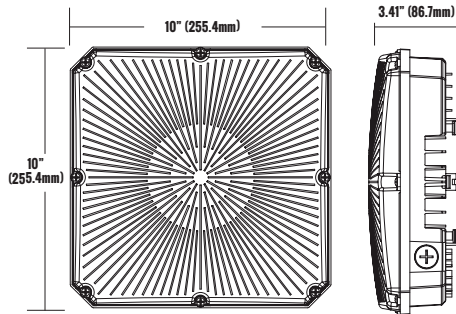


PRODUCT CODE: CNM60-341F-DB
60W SLIM LED CANOPY


PRODUCT DESCRIPTION

The new Etlin-Daniels generation of CNM40 and CNM60 LED Slim Canopy fixtures offer an excellent choice for lighting hallways, tunnels, building entrances and canopies, storage areas and both underground and above ground parking facilities. With an IP66 Wet Location rating, it is ideal for indoor and outdoor applications, and its heat and UV resistant polycarbonate lens adds to its safety features in public access areas. We listened to what our customers and end-users were telling us, and this new generation features a frosted lens - this will eliminate the glare that drivers see when pulling into a parking garage from other canopy style fixtures. The slim profile allows for both flush mount and pendant mounting, and the 1-10V Continuous Dimming enhances the already significant energy savings for this fixture.


FEATURES

- LED light source
- Compact, light weight steel housing
- Frosted UV resistant polycarbonate lens provides even and glare-free illumination
- 40W replaces 175W HID / 60W replaces 250W HID
- Fixtures can be surface or pendant mounted
- IP66 Wet Location rated
- 1-10V Continuous Dimming
- 5 year warranty
- L70 - 50,000 hours
- DLC Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
SAMSUNG	240 CHIPS	120LM/W	7200LM	4000K	140°	>80 CRI	347V	50-60HZ	>80.5%	>0.90	<20%

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
60W	ADC12 ALUMINUM / POLYCARBONATE OPTICAL LENS INCLUDED	IP66	>50,000 HOURS	-40°C~+70°C -40°F~+158°F	-40°C~+40°C -40°F~+104°F	10 X 10 X 3.41 INCHES (255.4 X 255.4 X 86.7 MM)	11.88 X 12.00 X 4.64 INCHES (302 X 305 X 118MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

PENDANT MOUNTNG/
FLUSH MOUNTNG

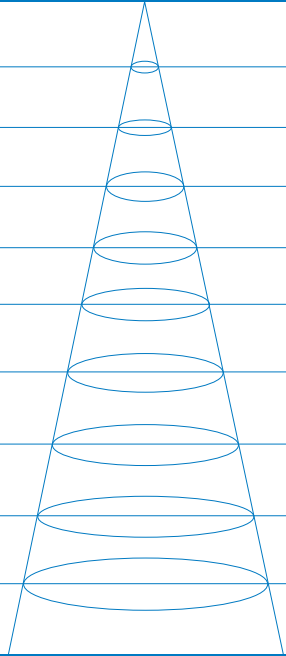
FIXTURE COLOR

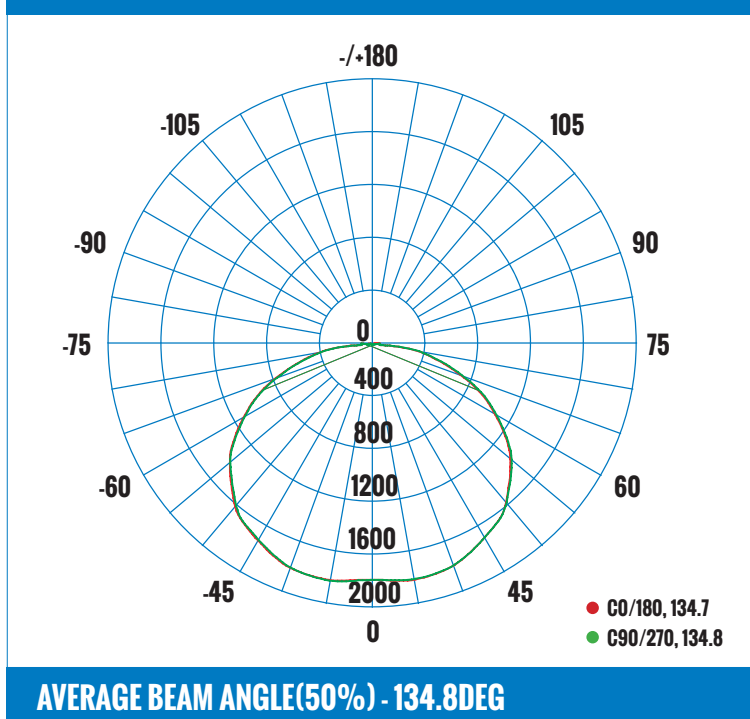
DARK BRONZE

OPTIONAL ACCESSORIES

1-10 CONTINUOUS DIMMING

PRODUCT CODE: CNM60-341F-DB
60W SLIM LED CANOPY
LUMINAIRE PHOTOMETRIC (TEST REPORT)
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 5808LM

3.28FT 1M	28.04,172.4LX		15.71FT 4.78M
6.56FT 2M	7.009,43.10LX		31.42FT 9.57M
9.84FT 3M	3.115,19.15LX		47.13FT 14.36M
13.12FT 4M	1.752, 10.77LX		62.84FT 19.15M
16.40FT 5M	1.121, 6.896LX		78.54FT 23.93M
19.69FT 6M	0.7788,4.789LX		94.25FT 28.72M
22.97FT 7M	0.5772,3.518LX		110FT 33.52M
26.25FT 8M	0.4381,2.694LX		125.7FT 38.31M
29.52FT 9M	0.3461,2.128LX		141.4FT 43.09M
32.80FT 10M	0.2804,1.724LX		157FT 47.85M
HT	EAVG/EMAX	ANGLE: 134.66DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

CERTIFICATIONS

DRIVER/LED CHIP
SAMSUNG
ORDERING INFORMATION - CNM SERIES

SERIES	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	LENS	FINISH
E.G. CN	M	60	3	4	1	F	DB
CN - CANOPY	M - MEDIUM	60 - 60W	3 - 347V	4 - 4000K	1 - 1-10V CONTINUOUS DIMMING	F - FROSTED LENS	DB - DARK BRONZE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com