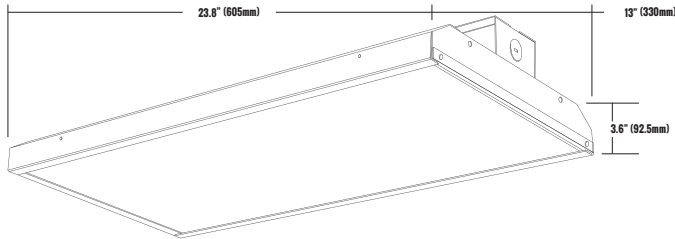


PRODUCT CODE: HBL52-155W40-WH
LED LINEAR HIGH BAY/2FT


PRODUCT DESCRIPTION

The new Etlin-Daniels HBL52-155W40-WH Linear Highbay provides high lumen efficacy, excellent color rendering, flexible mounting options, and has precision designed, glare free optics.

The new compact size highbay offers the best in performance and energy efficient solutions for industrial, commercial, retail and sports applications (wire guards available).

Further energy savings can be achieved by taking advantage of the 0-10V Continuous Dimming.

FEATURES

- LED Indoor Light Source.
- Efficacy - 136lm/w
- Damp location rated
- Packaging includes V-Hooks & Chain
- Multiple Mounting Options available
- Wire guards available
- CRI >80
- 0-10V Continuous Dimming
- 5 year warranty
- L70 - 50,000 hours
- DLC Premium.

PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
SEOUL	504 CHIPS	135LM/W	20,925LM	4000K	120°	>80CRI	120V - 347V	50-60HZ	86%-87%	0.9	10%

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
155W	BAKED WHITE ENAMEL/OPAL LENS DIFFUSER	>50,000 HOURS	-40°C~-85°C -40°F~-185°F	-20°C~-55°C -4°F~-131°F	23.8 X 13 X 3.6 INCHES (605 X 330 X 92.5 MM)	24.80 X 12.95 X 3.85 INCHES (630 X 329 X 98 MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

V HOOK & CHAIN/PENDANT MOUNT APPLICATIONS

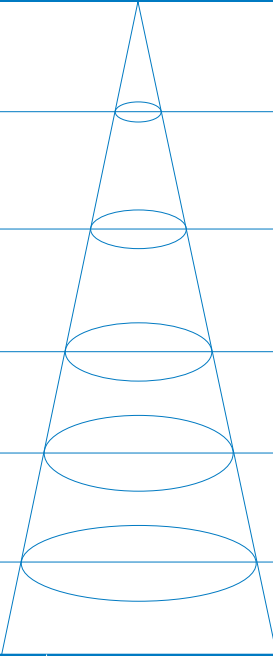
FIXTURE COLOR

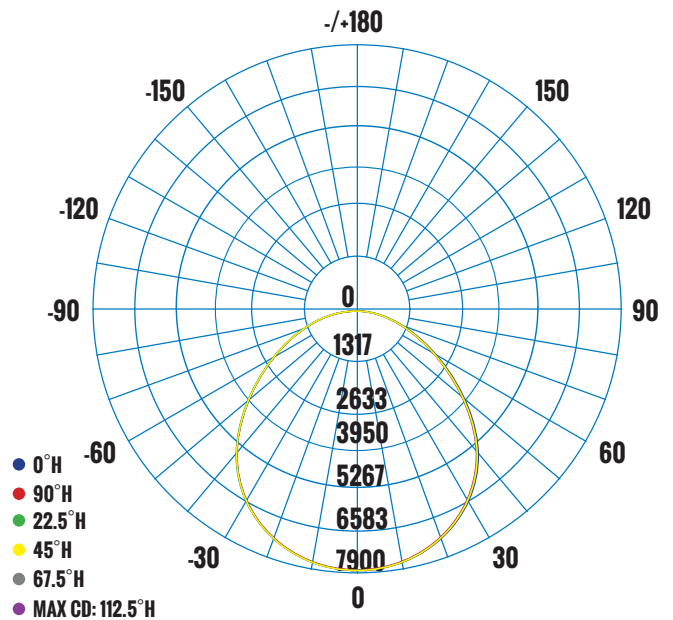
WHITE ENAMEL/OPAL LENS

CONTROL TYPE

0-10V CONTINUOUS DIMMING

PRODUCT CODE: HBL52-155W40-WH
LED LINEAR HIGH BAY/2FT
LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT:			VERT BEAM	HORIZ BEAM
2.29FT 0.7M	17,597.70 LUX		5.57FT 1.7M	5.57FT 1.7M
4.26FT 1.3M	4,399.43 LUX		11.48FT 3.5M	11.15FT 3.4M
6.56FT 2.0M	1,955.30 LUX		17.06FT 5.2M	16.73FT 5.1M
8.85FT 2.7M	1,099.86 LUX		22.63FT 6.9M	21.98FT 6.7M
10.82FT 3.3M	703.91 LUX		28.21FT 8.6M	27.55FT 8.4M
13.12FT 4.0M	488.83 LUX		34.12FT 10.4M	33.13FT 10.1M
HT	EAVG/EMAX	VERT SPREAD: 104.6DEG HORI SPREAD: 103.4DEG		DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

CERTIFICATIONS

DRIVER/LED CHIP

MOUNTING OPTIONS/ACCESSORIES


WIRE GUARD -
PART#: HBL52-WG-4L



PENDANT/CENTRE BOX -
PART#: HBL-CB-20GUA

ORDERING INFORMATION - HBL52 SERIES

SERIES	TYPE	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. HBL	5	2	155	W	4	0	WH
HBL - HIGH BAY LINEAR	5 - DLC 5	2 - 2'	155 - 155W	W - 120V - 347V	4 - 4000K	0 - 0-10V CONTINUOUS DIMMING	WH - WHITE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com