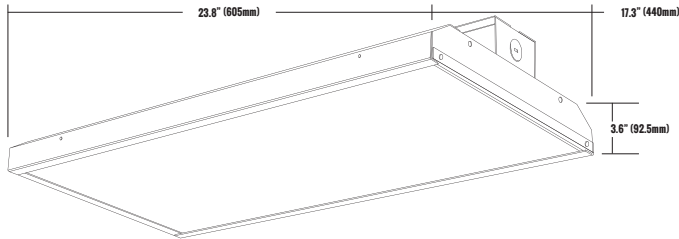


PRODUCT CODE: HBL52-210W40-WH
LED LINEAR HIGH BAY/2FT


PRODUCT DESCRIPTION

The new Etlin-Daniels HBL52-210W40-WH Linear Highbay provides high lumen efficacy, excellent color rendering, flexible mounting options, and has precision designed, glare free optics.

The new compact size highbay offers the best in performance and energy efficient solutions for industrial, commercial, retail and sports applications (wire guards available).

Further energy savings can be achieved by taking advantage of the 0-10V Continuous Dimming.


FEATURES

- LED Indoor Light Source.
- Efficacy - 135lm/w
- Damp location rated
- Packaging includes v-hooks and chain
- Multiple mounting options available
- Wire guards available
- CRI >80
- 0-10V Continuous Dimming
- 5 year warranty
- L70 - 50,000 hours
- DLC Premium.

PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
SEOUL	672 CHIPS	135LM/W	28,350LM	4000K	120°	>80CRI	120V - 347V	50-60HZ	86%-87%	0.9	10%

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
210W	BAKED WHITE ENAMEL/OPAL LENS DIFFUSER	>50,000 HOURS	-40°C~-85°C -40°F~-185°F	-20°C~-55°C -4°F~-131°F	23.8 X 17.3 X 3.6 INCHES (605 X 440 X 92.5 MM)	24.80 X 12.95 X 3.85 INCHES (630 X 329 X 98 MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

V HOOK & CHAIN/PENDANT MOUNT APPLICATIONS

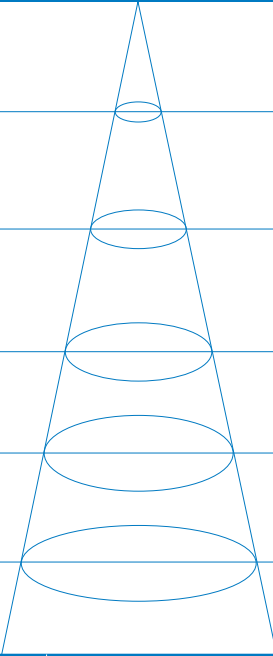
FIXTURE COLOR

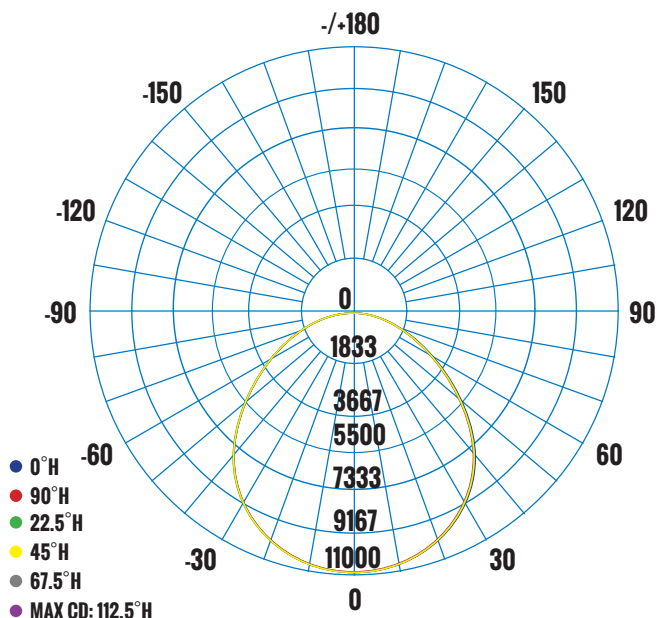
WHITE ENAMEL/OPAL LENS

CONTROL TYPE

0-10V CONTINUOUS DIMMING

PRODUCT CODE: HBL52-210W50-WH
LED LINEAR HIGH BAY/2FT
LUMINAIRE PHOTOMETRIC (TEST REPORT)

ILLUMINANCE (AT A DISTANCE) FLUX OUT:			VERT BEAM	HORIZ BEAM
2.29FT 0.7M	24,232.73FC		5.57FT 1.7M	5.57FT 1.7M
4.26FT 1.3M	6,058.18FC		11.15FT 3.4M	11.15FT 3.4M
6.56FT 2.0M	2,692.53FC		17.06FT 5.2M	16.73FT 5.1M
8.85FT 2.7M	1,514.55FC		22.63FT 6.9M	22.30FT 6.8M
10.82FT 3.3M	969.31FC		28.21FT 8.6M	27.88FT 8.5M
13.12FT 4.0M	673.13FC		33.79FT 10.3M	33.46FT 10.2M
HT	EAVG/EMAX	VERT SPREAD: 104.5DEG HORI SPREAD: 104.0DEG		DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

CERTIFICATIONS


CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

MOUNTING OPTIONS/ACCESSORIES

 WIRE GUARD -
PART#: HBL52-WG-6L

 PENDANT/CENTRE BOX -
PART#: HBL-CB-20GUA

ORDERING INFORMATION - HBL52 SERIES

SERIES	TYPE	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. HBL	5	2	210	W	4	0	WH
HBL - HIGH BAY LINEAR	5 - DLC 5	2 - 2'	210 - 210W	W - 120V - 347V	4 - 4000K	0 - 0-10V CONTINUOUS DIMMING	WH - WHITE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com