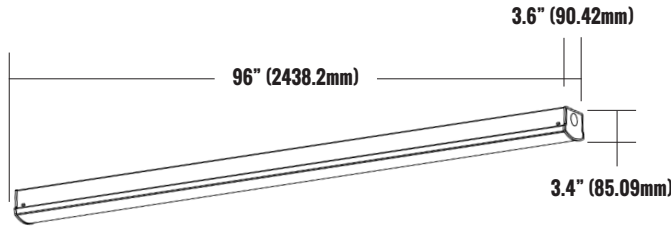


PRODUCT CODE: STL58-65WL40-WH
8FT. LED LINEAR STRIP


PRODUCT DESCRIPTION

The new generation of Etlin-Daniels STL5 series LED Strip Fixtures offers the latest in performance and flexibility for both fixture replacement and upgrades, as well as for new construction. These fixtures can be surface mounted to walls and ceilings, or suspended with optional v-hooks and chain. The high efficacy of 130lm/w allows for superior energy savings and the frosted lens delivers even and glare-free illumination. End knockouts provide for continuous row mounting, and wire guards are available to protect against physical shock. An innovative and easy-to-install j-box cover comes with each fixture to ensure that wires are properly protected and the proper aesthetic is maintained.

The STL5 series comes with an innovative driver that allows for adding a cost-effective PIR sensor option to each fixture, with multiple dimming, daylight settings and on / off options. Available in 20W - 2 foot / 35W - 4 foot / 65W - 8 foot lengths in both 4000K & 5000K, 120-347V. If not using the PIR sensor option, you can add to the energy savings by taking advantage of the available 0-10V Continuous Dimming.

FEATURES


- LED Indoor Light Source
- Light weight powder coated metal housing with frosted glare free lens
- Fixtures can be surface or suspension mounted
- End knockouts for continuous mounting.
- 120-347V
- Damp location rated
- Optional bracket and PIR Sensor available - Remote Control required
- Each STL5-SENPIR can control up to a total of 4 fixtures - any length
- J-box covers included
- Wire guards available
- 0-10V Continuous Dimming
- 5 year warranty
- L70 - 50,000 hours
- DLC certified

PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOUR TEMPERATURE	CRI	VOLTAGE	POWER FREQ.	POWER FACTOR	HARMONIC DISTORTION
SEOUL	168 CHIPS	131LM/W	8515LM	4000K	>80CRI	AC120V-347V	50-60HZ	>0.90	<10%

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE	
65W	STEEL/FROSTED LENS	>50,000 HOURS	-40°C~+85°C -40°F~+185°F	-20°C~+55°C 55°F~+131°F	96 X 3.4 X 3.6 INCHES (2438.2 X 85.2 X 90.5 MM)	98.22 X 4.64 X 3.93 INCHES (2495 X 118 X 100 MM)	

ADDITIONAL INFORMATION

INSTALLATION METHOD

SUSPENDED OR SURFACE


FIXTURE COLOUR


WHITE

CONTROL TYPE

0-10V DIMMABLE

PRODUCT CODE: STL58-65WL40-WH
8FT. LED LINEAR STRIP
LUMINAIRE PHOTOMETRIC (TEST REPORT)

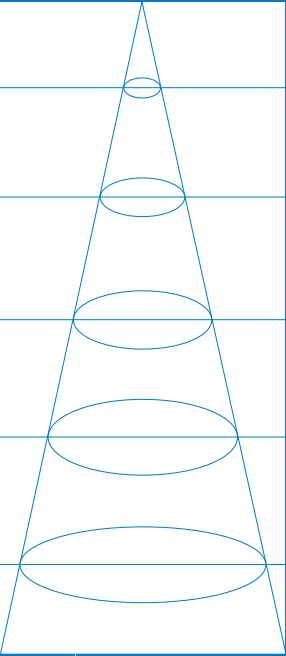


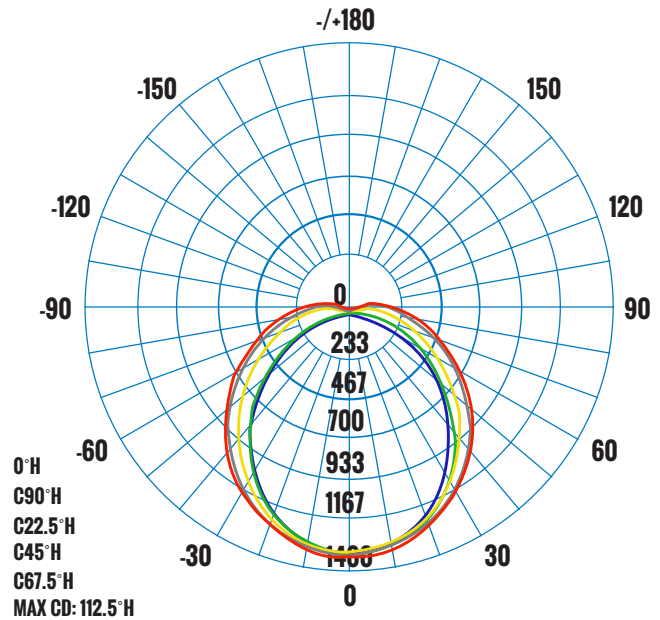




ILLUMINANCE (AT A DISTANCE) -			VERT BEAM	HORIZ BEAM
2.29FT 0.7M	2,952.90LUX		5.24FT 1.6M	9.18FT 2.8M
4.26FT 1.3M	738.23 LUX		10.17FT 3.1M	18.04FT 5.5M
6.56FT 2.0M	328.10 LUX		15.42FT 4.7M	27.23FT 8.3M
8.85FT 2.7M	184.56 LUX		20.66FT 6.3M	36.42FT 11.1M
10.82FT 3.3M	118.12 LUX		25.59FT 7.8M	45.27FT 13.8M
13.12FT 4.0M	82.03 LUX		30.83FT 9.4M	54.46FT 16.6M
HT	EAVG/EMAX	VERT SPREAD: 99.2DEG HORI SPREAD: 128.6DEG		DIA

POLAR CANDELA DISTRIBUTION

AVERAGE BEAM ANGLE(50%) HORIZ:128.6 / VERT:99.2
CERTIFICATIONS


CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP

MOUNTING OPTIONS/ACCESSORIES

							
SENSOR BRACKET - PART#: STL5-SENBK	PIR SENSOR PART#: STL5-SENPIR	REMOTE CONTROL FOR SENPIR PART#: STL5-RC	CHAIN - OPTIONAL PART#: STL-CH	V HOOK - OPTIONAL PART#: STL-VHOOKS	CONNECTOR BRACKET - PART#: STL5-CB	WIRE GUARD - PART#: STL5-WG-8	LENS - PART#: STL58-LEN

ORDERING INFORMATION - STL58 SERIES

SERIES	SIZE	WATTAGE	VOLTAGE	LOW VOLTAGE	COLOR TEMPERATURE	DIMMABLE	FINISH
E.G. STL5	8	65	W	L	4	0	WH
STL5 - STRIP LIGHT	8 - 8'	65 - 65W	W - 120-347V	L - 12V OUTPUT	4 - 4000K 5 - 5000K	0 - 0-10V	WH-WHITE

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com