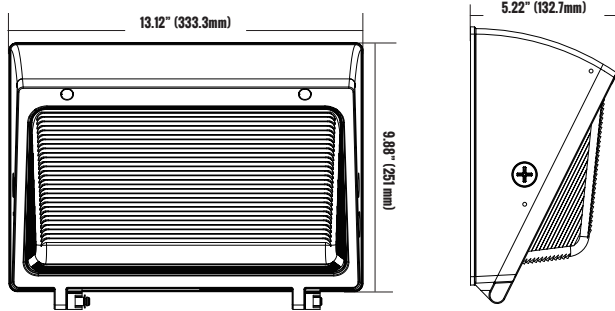


PRODUCT CODE: WP5M-80100120-W40-CD
MULTI-WATTAGE 80W / 100W / 120W LED WALL PACK


PRODUCT DESCRIPTION

Etlin-Daniels new generation of WP5M LED Classic Wall Packs offer an easy to install, high efficacy option to either replace existing and inefficient HID wall packs, or for your new construction projects. Available in both 4000K & 5000K, in 120-347V, the WP5M series features a Wattage Selection Switch. On the lower wattage design, you can adjust between 40W & 60W. On the higher wattage design, you can adjust between 80W, 100W and 120W. Both wattage designs use the same size housing which allows for only one Wire Guard option as well as only one Dark Sky Compliant Shield option. The durable heavy-duty die-cast aluminum body and impact resistant, high efficiency borosilicate glass refractor provide a maintenance-free, safe perimeter environment for commercial, industrial, healthcare, residential, retail and hospitality properties. For further energy savings, take advantage of the 0-10V Continuous Dimming option.

FEATURES

- Outdoor LED Light Source.
- Light weight, heavy duty die-cast aluminum body with rust and corrosion-free powder coat finish
- High efficiency impact-resistant borosilicate glass refractor with wide beam pattern
- Wattage Selectable Switch - 40W/60W & 80W/100W/120W
- Easy to install surface mount options
- 0-10V Continuous Dimming
- IP65 Wet Location rated
- Dark Sky compliant shield and wire guard available
- 5 year warranty
- L70 - 50,000 hours
- DLC Premium

PRODUCT SPECIFICATIONS (OPTICAL DATA)

LED TYPE	LED QTY	SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	BEAM ANGLE	CRI	VOLTAGE	POWER FREQ.	POWER EFFICIENCY	POWER FACTOR	HARMONIC DISTORTION
LUMILEDS	322 CHIPS	143.76 LM/W 139.31 LM/W 136.67 LM/W	11500LM 13931LM 16400LM	4000K	90° x 100°	>80CRI	120 - 347V	50-60HZ	>90%	>0.90	<20%

PRODUCT SPECIFICATIONS (ELECTRICAL DATA)

PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	INGRESS PROTECT	LIFE SPAN	STORAGE TEMP	OPERATING TEMP	PRODUCT DIMENSIONS	CARTON SIZE
80W / 100W / 120W	ALUMINUM/ BOROSILICATE OPTICAL LENS INCLUDED	IP65	>50,000 HOURS	-40°C--70°C -40°F--158°F	-40°C--45°C -40°F--113°F	13.11 X 9.88 X 5.22 INCHES (333 X 251 X 132 MM)	15.66 X 12.59 X 8.18 INCHES (398 X 320 X 208MM)



ADDITIONAL INFORMATION

INSTALLATION METHOD

WALL MOUNT

FIXTURE COLOR

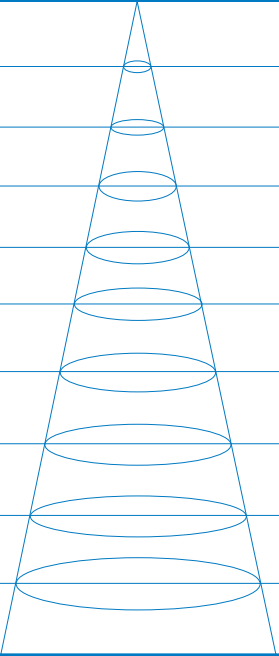
DARK BRONZE FINISH

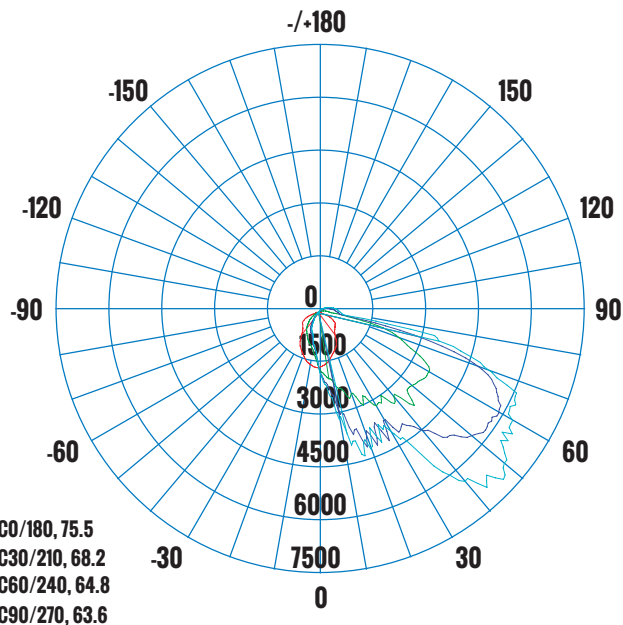
CONTROL TYPE

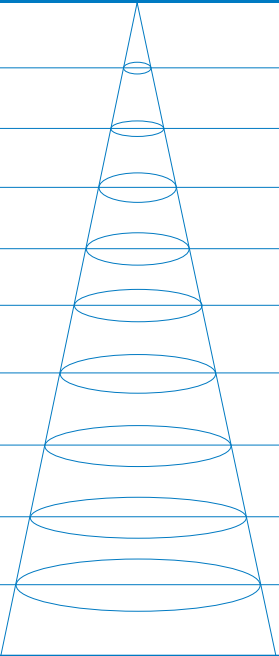
0 - 10V CONTINUOUS DIMMING

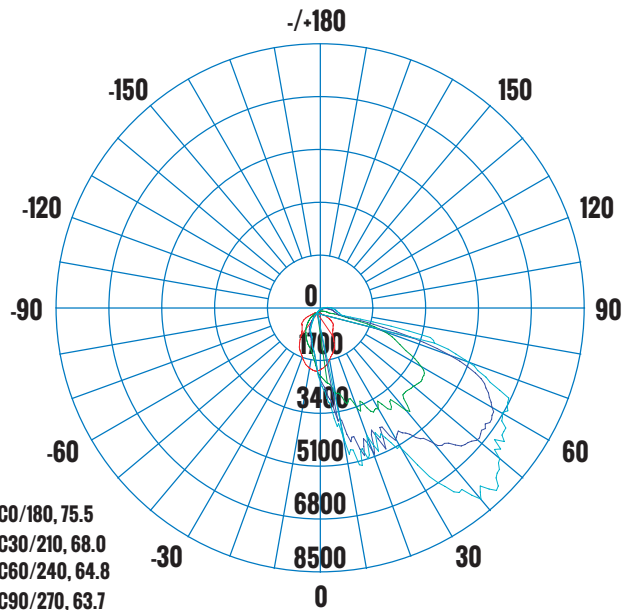
PRODUCT CODE: WP5M-80100120-W40-CD
MULTI-WATTAGE 80W / 100W / 120W LED WALL PACK

LUMINAIRE PHOTOMETRIC (TEST REPORT) - 80W
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 1,757LM

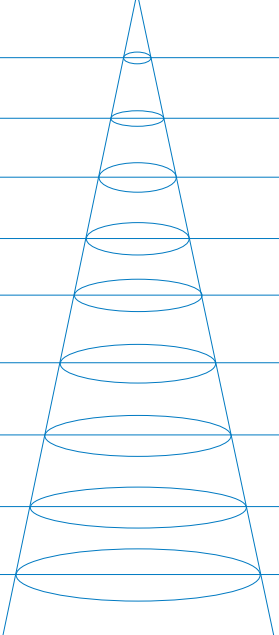
10FT 3.048M	154.2, 402.7LX		12.39FT 377.70CM
12FT 3.658M	107.1, 279.6LX		14.87FT 453.24CM
16FT 4.877M	60.23, 157.3LX		19.83FT 604.32CM
20FT 6.096M	38.55, 100.7LX		24.78FT 755.40CM
30FT 9.144M	17.13, 44.74LX		37.17FT 1133.09CM
35FT 10.67M	12.59, 32.87LX		43.37FT 1321.94CM
40FT 12.19M	9.637, 25.17LX		49.56FT 1510.79CM
45FT 13.72M	7.615, 19.89LX		55.76FT 1699.64CM
50FT 15.24M	6.168, 16.11LX		61.95FT 1888.49CM
55FT 16.76M	5.097, 13.31LX		68.15FT 2077.34CM
HT	EAVG/EMAX	ANGLE: 63.56DEG	DIA

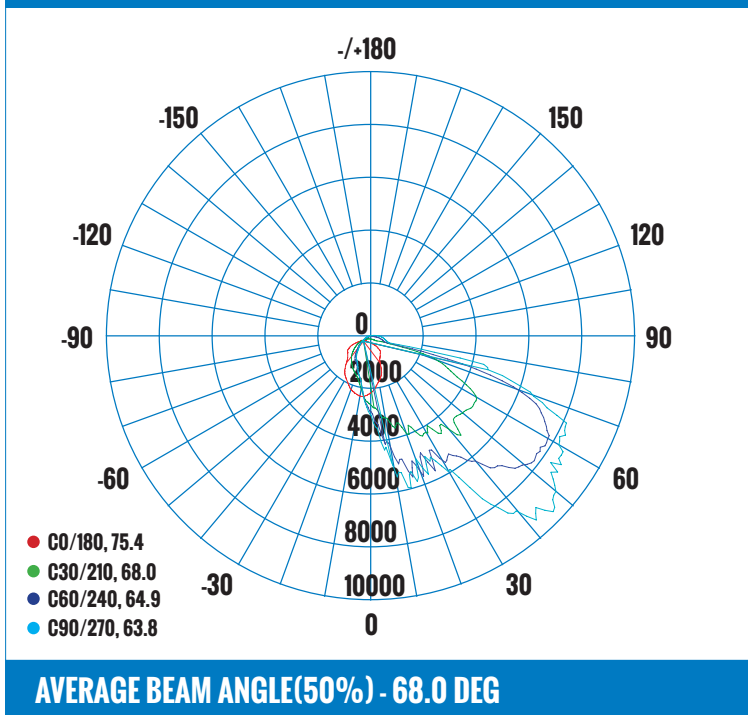
LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 68.0DEG
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 100W
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 2,038LM

10FT 3.048M	178.8, 469.4LX		12.40FT 378.21CM
12FT 3.658M	124.2, 326.0LX		14.89FT 453.86CM
16FT 4.877M	69.84, 183.3LX		19.85FT 605.14CM
20FT 6.096M	44.70, 117.3LX		24.81FT 756.43CM
30FT 9.144M	19.87, 52.15LX		37.22FT 1134.64CM
35FT 10.67M	14.60, 38.32LX		43.43FT 1323.75CM
40FT 12.19M	11.17, 29.34LX		49.63FT 1512.85CM
45FT 13.72M	8.830, 23.18LX		55.84FT 1701.96CM
50FT 15.24M	7.152, 18.77LX		62.04FT 1891.07CM
55FT 16.76M	5.911, 15.52LX		68.24FT 2080.18CM
HT	EAVG/EMAX	ANGLE: 63.63DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

AVERAGE BEAM ANGLE(50%) - 68.0 DEG

PRODUCT CODE: WP5M-80100120-W40-CD
MULTI-WATTAGE 80W / 100W / 120W LED WALL PACK
LUMINAIRE PHOTOMETRIC (TEST REPORT) - 120W
ILLUMINANCE (AT A DISTANCE) - FLUX OUT: 2,344LM

10FT 3.048M	205.7, 542.0LX		12.43FT 378.88CM
12FT 3.658M	142.9, 376.4LX		14.91FT 454.65CM
16FT 4.877M	80.36, 211.7LX		11.19FT 606.20CM
20FT 6.096M	51.43, 135.5LX		24.86FT 757.75CM
30FT 9.144M	22.86, 60.22LX		37.29FT 1136.63CM
35FT 10.67M	16.79, 44.24LX		43.51FT 1326.07CM
40FT 12.19M	12.86, 33.87LX		49.72FT 1515.51CM
45FT 13.72M	10.16, 26.77LX		55.94FT 1704.95CM
50FT 15.24M	8.229, 21.68LX		62.15FT 1894.39CM
55FT 16.76M	6.800, 17.92LX		68.36FT 2083.82CM
HT	EAVG/EMAX	ANGLE: 63.72DEG	DIA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

CERTIFICATIONS


CAN ICES-005 (B) / NMB-005 (B)

DRIVER/LED CHIP
LUMILEDS
ACCESSORIES

ORDERING INFORMATION - WP5M SERIES

SERIES	DLC TYPE	SIZE	WATTS	VOLTAGE	COLOR TEMPERATURE	DIMMABLE	LENS	FINISH
E.G. WP	5	M	80100120	W	4	0	C	D
WP - WALL PACK	5 - DLC	M - MEDIUM	80100120 -	W - 120 - 347V	4 - 4000K	0 - 10V	C - CLEAR	D - DARK BRONZE
			80W / 100W /			CONTINUOUS DIMMING		
			120W					

Head Office - 1850 Wilson Ave. · Toronto, ON · M9M 1A1 · Tel: 416.741.7336 · Fax: 416.741.9104

Toll Free: in Canada. 1.800.661.9610 · in USA. 1.888.762.5384 (SOCKETS4U)

www.etlin-daniels.com · For sales/service questions - sales@etlin.com