



LEDS by CREE⊕

5.25"

133mm

SPECIFICATIONS

CONSTRUCTION: Copper tube shield hanging Bullet on 18" long baby oval brass chain and cast brass hoop; matching stamped copper FA-24-LGSPUN canopy

LENS: High impact clear tempered flat glass O-RING: High temperature red silicone

LAMP SUPPLIED: 20w MR16 FL(BAB) 5000 hours average rating (50w max)

LAMP OPTIONS: We recommend ARROW 4w LED (-LED) or 6w LED (-LED6W); 50,000 hour

or ARROW SAVER 4w LED (-LAS); 40,000 hour

SOCKET: High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

WIRING: Black 2 foot 18/2 zip cord from base of fixture (12v only) For 25 foot 16/2 fixture lead wire add -25F to catalog number.

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable

(12/2, 10/2 or 8/2 only)

MOUNTING: FA-24-LGSPUN canopy and hardware FINISH: Unfinished Copper, optional finishes available

ORDERING INFORMATION CATALOG NO. **DESCRIPTION LAMP SHIP WEIGHT** RXS-04-COP Copper Tube Shield Hanging Bullet 20w MR16 FL(BAB) 2.0 lbs.

114mm 0.9 23mm 18" 457mm


2.125 54mm

4.5"



LIGHT DISTRIBUTIONS AND PHOTOMETRICS

with Chain and Canopy

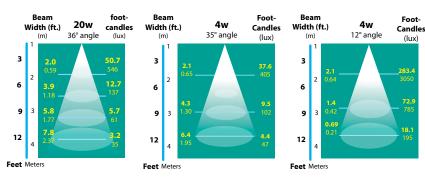

FL-13-BAB-FG

FL-LED-MR16-BAB

FL-LED-MR16-ESX







BEAM/GLARE CONTROL ACCESSORIES

FA-08-21 Round 1/8" Hex Cell Louver FA-11-33-BLUE Blue Tempered Flat Glass Lens FA-11-33-GREEN Green Tempered Flat Glass Lens FA-11-33-AMBER Amber Tempered Flat Glass Lens FA-11-33-RED Red Tempered Flat Glass Lens FA-98-02 Linear Spread Tempered Glass Lens FA-104-SB Wide Spread Sand Blasted Glass Lens Softener

Black Texture (Standard) -BLT	Antique Verde -ATV	Bronze Texture -BRT	Camel -CAM	White Texture -WTX	Hunter Texture -HTX	Rust -RST	Weathered Iron -WIR	Weathered Brown -WBR	Stucco -STU	Rubbed Verde -RBV	Chrome Powder -CPR	Acid Rust -BAR/CAR	Verde	Black Acid Treatment -BAT
RXS-04 Cut Sh	eet	082815										BRAS	S & COPPER ONI	Y