

FHEC33




Thermoplastic Micro LED Exit Sign/Emergency Light Combo

- Injection-molded, high impact, UV-stabilized, UL94 V-0 thermoplastic construction in white finish
- Energy saving LED
- Removable universal chevrons for directional indicators
- Maintenance Free Ni-Cd battery
- Snap-fit faceplate design for installation without tools, extra faceplate included
- Top, back, J-box or end mounting through universal mounting plate and canopy
- Two factory installed fully adjustable glare-free high brightness LED lighting lamps
- Dual voltage 120V/277V
- UL Listed in accordance with UL924


General Specifications

	FHEC33*R	FHEC33*RRC	FHEC33*G	FHEC33*GRC
Input Voltage	120/277VAC			
Input Current (120V)	44mA	44mA	34mA	34mA
Input Current (277V)	17mA	17mA	15mA	15mA
Input Power (120V)	5W	5W	3.9W	3.9W
Input Power (277V)	4.8W	4.8W	3.9W	3.9W
Operating Frequency	60Hz			
Operating Ambient Temperature Range (Ta)	20°C to 30°C / 68°F to 86°F			
Overall Size	19.21" L x 8.15" H			
Emergency Operation	90 minutes			
Compliance	cULus 924 Listed Damp Location			
Warranty	5 years from the date of manufacture			

Mechanical Data

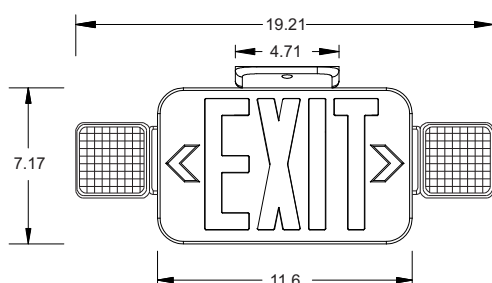

FRONT VIEW



SIDE VIEW

NOTE:

- 1) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.
- 2) Spanish "Salida" faceplate also available, must be purchased separately.

Part numbers:

- FHE30-20SFG= Green lettering
- FHE30-20SFR= Red lettering

Part Number Matrix

FHEC33

W

Finish
W = White

R

Letter Color
R = Red
G = Green

RC

Options
RC = Remote Capable

Remote Capable (RC) remote load rated at 3.44W