



FHEM12




Thermoplastic Adjustable LED Emergency Lights

- Push to test switch
- LED charge indicator
- Long life LED lamps
- Fully adjustable glare free lighting heads
- Wet location option available
- Universal mounting pattern knockouts in backplate for J-Box mounting
- Snap fit construction speeds installation
- Dual voltage 120V/277V
- UL listed in accordance with UL924
- Maintenance Free 3.6v NiCd Battery


General Specifications

Input Voltage	120/277VAC
Input Current (120V)	25mA
Input Current (277V)	11mA
Input Power (120V)	1.9W
Input Power (277V)	1.9W
Operating Frequency	60Hz
Operating Ambient Temperature Range (Ta)	Ambient temperature rating: 10°C to 40°C.
Overall Size	12.30" L x 4.90" H (Common) 13.33" L x 5.76" H (Water Proof)
Emergency Operation	90 minutes
Compliance	UL 924 Listed Damp Location (Common) Wet Location (Water Proof)
Warranty	5 years from the date of manufacture

Mechanical Data

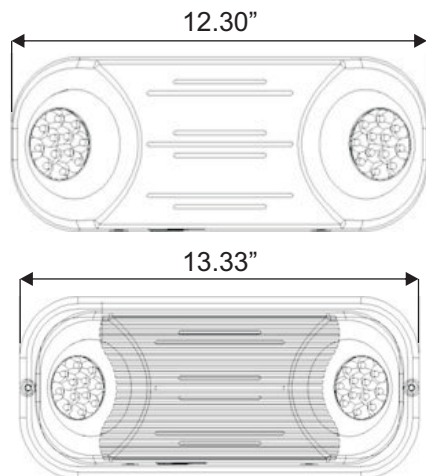

FRONT VIEW

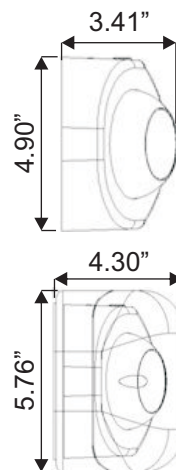

SIDE VIEW

NOTE:
1) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.

Part Number Matrix

FHEM12

W

Housing Color
W = White

W

Options
Blank = Common
W = Water Proof

This product does not meet CEC Title 20 Code of Regulations.

Fulham Co. Inc.: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-779-2980 Fax.: 1-323-754-9060. order@fulham.com www.fulham.com
Specifications subject to change without notice.

2013-389 Rev I