


6" NEW CONSTRUCTION DOWNLIGHT 11.6W



PRO

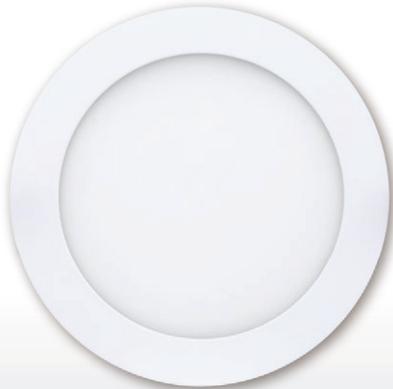

11.6W REPLACES



**75W
Inc.**

80% Energy Savings

\$211 Savings per lamp*

- Ⓞ Suitable for new construction and remodel installations
- Ⓞ Integrated J-box for quick installation
- Ⓞ Edge lighting technology
- Ⓞ Innovative design saves time and materials
- Ⓞ Easy to use spring action clips
- Ⓞ IC-rated



40,000 H



DIMMABLE



EFFICACY



WARRANTY



82 CRI (Ra)



SEMI DIRECTIONAL




LM 79

LM 80

TM 21



NEW CONSTRUCTION DOWNLIGHT PRODUCT FEATURES

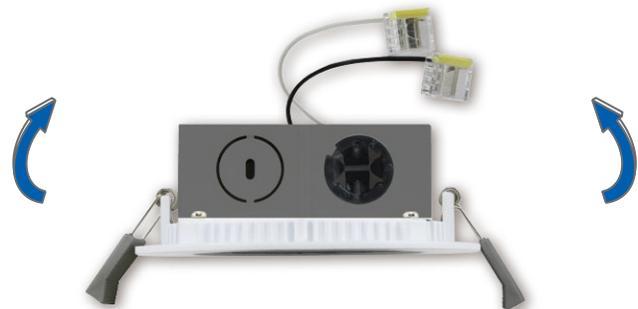

The 6" THINFIT SERIES CONSTRUCTION DOWNLIGHT is designed to be used for both new construction and remodel installations. All wiring takes place inside the integrated J-box which features a pre-installed wire clamp, quick connects and an easily removable lid. After the downlight is wired, simply replace the lid and push the spring action clips into the ceiling cutout. Save time and materials with this easy to install downlight.

6" NEW CONSTRUCTION DOWNLIGHT 11.6W



SPECIFICATIONS

Product Model	58028 11.6DLNC6DIM/827	58029 11.6DLNC6DIM/830	58030 11.6DLNC6DIM/840
Type	6" New Construction Downlight	6" New Construction Downlight	6" New Construction Downlight
Power	11.6	11.6	11.6
Voltage - Frequency	120V 60Hz	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Soft White 2700K	Warm White 3000K	Cool White 4000K
CRI (Ra)	82	82	82
Typical lumens (lm)	810	830	850
Efficacy (LPW)	70	72	73
Beam Angle	100°	100°	100°
Dimmable	Yes	Yes	Yes
Power Factor	0.9	0.9	0.9
Rated Lifetime - L70 (hrs.)	40,000	40,000	40,000
Dia. x MOL	6.84"x1.77" (173x45mm)	6.84"x1.77" (173x45mm)	6.84"x1.77" (173x45mm)
Weight (lb. / g)	0.71lb / 322g	0.71lb / 322g	0.71lb / 322g

* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$4 incandescent with 1000-hr lifetime, \$30 LED with 40,000-hr lifetime

** Suitable for damp locations. Not for use where directly exposed to weather or water

ACCESSORY ORDERING INFORMATION

Model	Product	Description
23EMDRIVER	98003	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)

Ref.#DS167-DLNC-6-111116