

6" CDL 18W TITANIUM LED SERIES



PRO




18W REPLACES



**2X18W
CFL**



60% Energy Savings

- ⌚ Fits existing architectural and commercial housing
- ⌚ 120-277V circuit with 0-10V dimming
- ⌚ Easy installation - Quick connector and pre-wired conduit
- ⌚ Lasts 4 times longer than CFL
- ⌚ Diffuse aluminum reflector with white trim produces soft, comfortable light
- ⌚ Available in 3000K, 3500K & 4000K CCT



PRODUCT FEATURES

Accessories include a carabiner safety clip that can be used during installation for easy wiring. Retaining clips are also included to secure the fixture if recessed frame does not already have pre-installed clips.

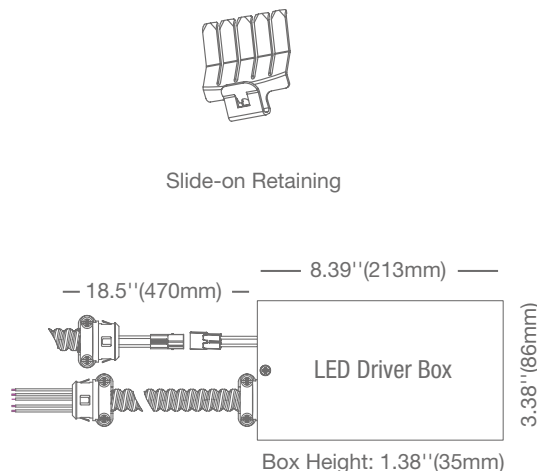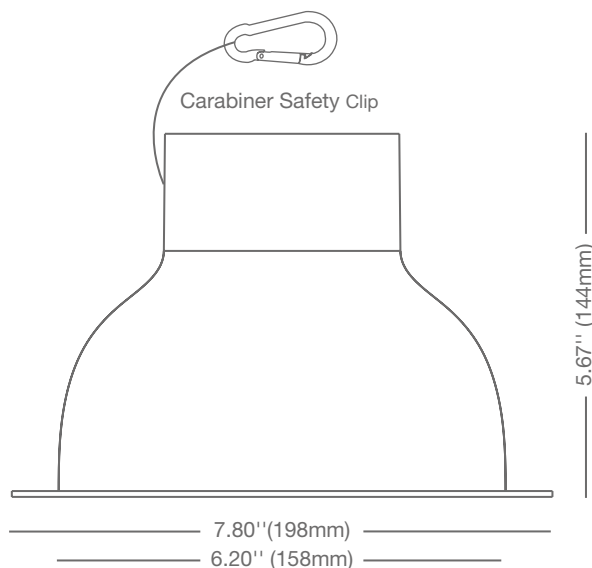


6" CDL 18W TITANIUM LED SERIES




APPLICATIONS


Retail

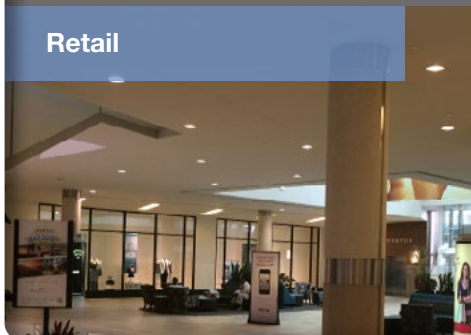

Hospitality

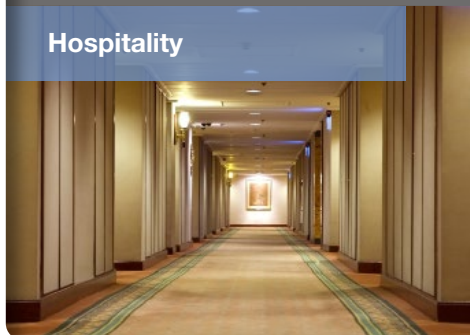

Office

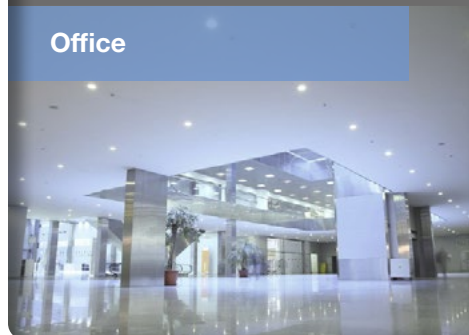

Ref.#: DS283-CDL6-18W

SPECIFICATIONS*

Product Model	98264 18CDL6DIM/830/277V	98265 18CDL6DIM/835/277V	98266 18CDL6DIM/840/277V
Type	6" Commercial Downlight	6" Commercial Downlight	6" Commercial Downlight
Power (W)	18	18	18
Voltage - Frequency	120-277V 50-60Hz	120-277V 50-60Hz	120-277V 50-60Hz
Color Temp. (ANSI)	Warm White 3000K	Neutral White 3500K	Natural White 4000K
CRI (Ra) (typ.)	80	80	80
Typical lumens (lm)	1440	1440	1480
Efficacy (LPW)	80	80	82
Beam Angle	90°	90°	90°
Dimmable	Yes	Yes	Yes
Power Factor	0.9	0.9	0.9
Temperature Rating	-13°F/-25°C - 95°F/35°C	-13°F/-25°C - 95°F/35°C	-13°F/-25°C - 95°F/35°C
Rated Lifetime - L70 (hrs.)	50,000	50,000	50,000
Dia. x MOL	6.20"x5.67" (158x144mm)	6.20"x5.67" (158x144mm)	6.20"x5.67" (158x144mm)
Trim Weight (lb. / g)	0.95lb / 430g	0.95lb / 430g	0.95lb / 430g
Driver Weight (lb. / g)	1.46lb / 660g	1.46lb / 660g	1.46lb / 660g

ORDERING INFORMATION

Model	Description	Instructions
/EM	Emergency LED Driver 10W	To order this option add /EM after the model number
Example: 18CDL6DIM/835/277V/EM		

* Suitable for damp locations. Not for use where directly exposed to weather or water

** Not intended for use in enclosed fixtures

*** Full installation guide and more details available on website

ACCESSORY ORDERING INFORMATION

Model	Product	Instructions
23EMDRIVER	98003	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)