


# 4" NEW CONSTRUCTION DOWNLIGHT 8.5W



PRO



8.5W REPLACES



50W Inc.

80% Energy Savings

\$159 Savings per lamp\*

- ⌚ Suitable for new construction and remodel installations
- ⌚ Integrated J-box for quick installation
- ⌚ Edge lighting technology
- ⌚ Innovative design saves time and materials
- ⌚ Easy to use spring action clips
- ⌚ IC-rated



40,000 H



DIMMABLE



EFFICACY



WARRANTY




82 CRI (Ra)



SEMI DIRECTIONAL



## NEW CONSTRUCTION DOWNLIGHT PRODUCT FEATURES

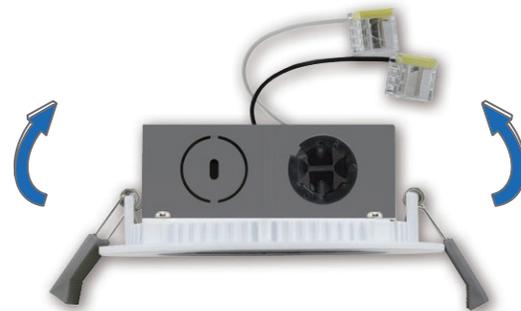

The 4" THINFIT SERIES DOWNLIGHT is designed to be used for both new construction and remodel installations. All wiring takes place inside the integrated J-box which features a pre-installed wire clamp, quick connects and an easily removable lid. After the downlight is wired, simply replace the lid and push the spring action clips into the ceiling cutout. Save time and materials with this easy to install downlight.

# 4" NEW CONSTRUCTION DOWNLIGHT 8.5W



## SPECIFICATIONS

Product Model	58025 8.5DLNC4DIM/827	58026 8.5DLNC4DIM/830	58027 8.5DLNC4DIM/840
<b>Type</b>	4" New Construction Downlight	4" New Construction Downlight	4" New Construction Downlight
<b>Power</b>	8.5	8.5	8.5
<b>Voltage - Frequency</b>	120V 60Hz	120V 60Hz	120V 60Hz
<b>Color Temp. (ANSI)</b>	Soft White 2700K	Warm White 3000K	Cool White 4000K
<b>CRI (Ra)</b>	82	82	82
<b>Typical lumens (lm)</b>	510	530	550
<b>Efficacy (LPW)</b>	60	62	65
<b>Beam Angle</b>	100°	100°	100°
<b>Dimmable</b>	Yes	Yes	Yes
<b>Power Factor</b>	0.9	0.9	0.9
<b>Rated Lifetime - L70 (hrs.)</b>	40,000	40,000	40,000
<b>Dia. x MOL</b>	4.71"x1.75" (120x44mm)	4.71"x1.75" (120x44mm)	4.71"x1.75" (120x44mm)
<b>Weight (lb. / g)</b>	0.45lb / 203g	0.45lb / 203g	0.45lb / 203g

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$4 incandescent with 1000-hr lifetime, \$30 LED with 40,000-hr lifetime

\*\* Suitable for damp locations. Not for use where directly exposed to weather or water

## ACCESSORY ORDERING INFORMATION

Model	Product	Description
23EMDRIVER	98003	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)