


### IMPORTANT

Read all breaking strength, safety and technical data relating to this product. Pages V-41 to V-45.

### Double Eye, Closed Mesh

For permanent support when cable end is available to be installed through grip.


| Cable Diameter Range<br>Inches (cm) | Approx. Breaking Strength Lbs. (N) |                 | E<br>Inches (cm) | M<br>Inches (cm) | Tin-Coated<br>Bronze | Stainless Steel |
|-------------------------------------|------------------------------------|-----------------|------------------|------------------|----------------------|-----------------|
|                                     | Tin-Coated Bronze                  | Stainless Steel |                  |                  |                      |                 |
| .50"- .62" (1.27-1.57)              | 530 (2,357)                        | 1,370 (6,094)   | 4" (10.16)       | 10" (25.40)      | <b>02201001</b>      | <b>02401001</b> |
| .63"- .74" (1.60-1.88)              | 790 (3,514)                        | 2,060 (9,163)   | 4" (10.16)       | 10" (25.40)      | <b>02201002</b>      | <b>02401002</b> |
| .75"- .99" (1.90-2.51)              | 1,020 (4,537)                      | 2,060 (9,163)   | 4" (10.16)       | 13" (33.02)      | <b>02201003</b>      | <b>02401003</b> |
| 1.00"-1.24" (2.54-3.15)             | 1,610 (7,161)                      | 2,670 (11,877)  | 5" (12.70)       | 14" (35.56)      | <b>02201005</b>      | <b>02401005</b> |
| 1.25"-1.49" (3.17-3.78)             | 1,610 (7,161)                      | 4,490 (19,972)  | 5" (12.70)       | 15" (38.10)      | <b>02201006</b>      | <b>02401006</b> |
| 1.50"-1.74" (3.81-4.42)             | 1,610 (7,161)                      | 4,490 (19,972)  | 5" (12.70)       | 17" (43.18)      | <b>02201007</b>      | <b>02401007</b> |
| 1.75"-1.99" (4.44-5.05)             | 2,150 (9,563)                      | 5,000 (22,241)  | 6" (15.24)       | 19" (48.26)      | <b>02201008</b>      | <b>02401008</b> |
| 2.00"-2.49" (5.08-6.32)             | 3,260 (14,500)                     | 8,940 (39,767)  | 6" (15.24)       | 21" (53.34)      | <b>02201009</b>      | <b>02401009</b> |
| 2.50"-2.99" (6.35-7.59)             | 3,260 (14,500)                     | 8,940 (39,767)  | 6" (15.24)       | 23" (58.42)      | <b>02201010</b>      | <b>02401010</b> |
| 3.00"-3.49" (7.62-8.86)             | 4,900 (21,795)                     | 12,000 (53,379) | 8" (20.32)       | 25" (63.50)      | <b>02201011</b>      | <b>02401011</b> |
| 3.50"-3.99" (8.89-10.13)            | 4,900 (21,795)                     | 12,000 (53,379) | 8" (20.32)       | 27" (68.58)      | <b>02201012</b>      | <b>02401012</b> |

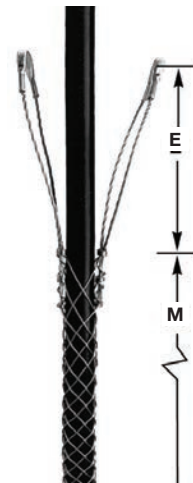

### Double Eye, Split Mesh, Lace Closing

For permanent support when cable end is not available.

| Cable Diameter Range<br>Inches (cm) | Approx. Breaking Strength Lbs. (N) |                 | E<br>Inches (cm) | M<br>Inches (cm) | Tin-Coated<br>Bronze | Stainless Steel |
|-------------------------------------|------------------------------------|-----------------|------------------|------------------|----------------------|-----------------|
|                                     | Tin-Coated Bronze                  | Stainless Steel |                  |                  |                      |                 |
| .50"- .62" (1.27-1.57)              | 530 (2,357)                        | —               | 4" (10.16)       | 10" (25.40)      | <b>02202001</b>      | —               |
| .63"- .74" (1.60-1.88)              | 790 (3,514)                        | 2,066 (9,190)   | 4" (10.16)       | 10" (25.40)      | <b>02202002</b>      | <b>02402002</b> |
| .75"- .99" (1.90-2.51)              | 1,020 (4,537)                      | 2,060 (9,163)   | 4" (10.16)       | 13" (33.02)      | <b>02202003</b>      | <b>02402003</b> |
| 1.00"-1.24" (2.54-3.15)             | 1,610 (7,161)                      | 2,678 (11,912)  | 5" (12.70)       | 14" (35.56)      | <b>02202005</b>      | <b>02402005</b> |
| 1.25"-1.49" (3.17-3.78)             | 1,610 (7,161)                      | 4,490 (19,972)  | 5" (12.70)       | 15" (38.10)      | <b>02202006</b>      | <b>02402006</b> |
| 1.50"-1.74" (3.81-4.42)             | 1,610 (7,161)                      | 3,750 (16,681)  | 5" (12.70)       | 17" (43.18)      | <b>02202007</b>      | <b>02402007</b> |
| 1.75"-1.99" (4.44-5.05)             | 2,150 (9,563)                      | 5,000 (22,241)  | 6" (15.24)       | 19" (48.26)      | <b>02202008</b>      | <b>02402008</b> |
| 2.00"-2.49" (5.08-6.32)             | 3,260 (14,500)                     | 8,940 (39,767)  | 6" (15.24)       | 21" (53.34)      | <b>02202009</b>      | <b>02402009</b> |
| 2.50"-2.99" (6.35-7.59)             | 3,260 (14,500)                     | —               | 6" (15.24)       | 23" (58.42)      | <b>02202010</b>      | —               |
| 3.00"-3.49" (7.62-8.86)             | 4,900 (21,795)                     | —               | 8" (20.32)       | 25" (63.50)      | <b>02202011</b>      | —               |
| 3.50"-3.99" (8.89-10.13)            | 4,900 (21,795)                     | —               | 8" (20.32)       | 27" (68.58)      | <b>02202012</b>      | —               |

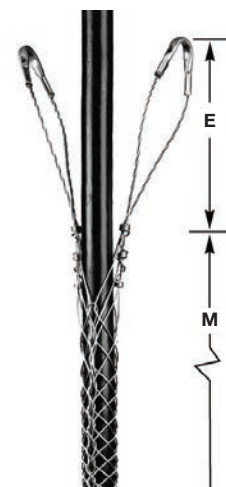

### Double Eye, Split Mesh, Rod Closing

For support when cable end is not available.

| Cable Diameter Range<br>Inches (cm) | Approx. Breaking Strength Lbs. (N) |                 | E<br>Inches (cm) | M<br>Inches (cm) | Tin-Coated<br>Bronze | Stainless Steel |
|-------------------------------------|------------------------------------|-----------------|------------------|------------------|----------------------|-----------------|
|                                     | Tin-Coated Bronze                  | Stainless Steel |                  |                  |                      |                 |
| .50"- .62" (1.27-1.57)              | 790 (3,514)                        | —               | 4" (10.16)       | 6.5"             | <b>02203001</b>      | —               |
| .63"- .74" (1.60-1.88)              | 790 (3,514)                        | 2,050 (9,119)   | 4" (10.16)       | 8.5" (21.59)     | <b>02203002</b>      | <b>02403002</b> |
| .75"- .99" (1.90-2.51)              | 1,020 (4,537)                      | 2,050 (9,119)   | 4" (10.16)       | 10.5" (26.67)    | <b>02203003</b>      | <b>02403003</b> |
| 1.00"-1.24" (2.54-3.15)             | 1,610 (7,161)                      | 2,650 (11,788)  | 5" (12.70)       | 12.5" (31.75)    | <b>02203005</b>      | <b>02403005</b> |
| 1.25"-1.49" (3.17-3.78)             | 1,610 (7,161)                      | 3,750 (16,681)  | 5" (12.70)       | 14.5" (36.83)    | <b>02203006</b>      | <b>02403006</b> |
| 1.50"-1.74" (3.81-4.42)             | 1,610 (7,161)                      | 3,750 (16,681)  | 5" (12.70)       | 15.5" (39.37)    | <b>02203007</b>      | <b>02403007</b> |
| 1.75"-1.99" (4.44-5.05)             | 2,150 (9,563)                      | 5,000 (22,241)  | 6" (15.24)       | 16.5" (41.91)    | <b>02203008</b>      | <b>02403008</b> |
| 2.00"-2.49" (5.08-6.32)             | 3,260 (14,500)                     | 8,950 (39,812)  | 6" (15.24)       | 19.5" (49.53)    | <b>02203009</b>      | <b>02403009</b> |
| 2.50"-2.99" (6.35-7.59)             | 3,260 (14,500)                     | 8,950 (39,812)  | 6" (15.24)       | 21.5" (54.61)    | <b>02203010</b>      | <b>02403010</b> |
| 3.00"-3.49" (7.62-8.86)             | 5,750 (25,576)                     | 11,150 (49,598) | 8" (20.32)       | 23.5" (59.69)    | <b>02203011</b>      | <b>02403011</b> |
| 3.50"-3.99" (8.89-10.13)            | 5,750 (25,576)                     | —               | 8" (20.32)       | 25.5" (64.77)    | <b>02203012</b>      | —               |

Note: E-Eye length. M-Mesh length at nominal diameter.

