



Simply Brilliant



High CRI



Dimmable



Product information

FEATURES

- 2x4FT 50W 5500LM Backlit Panel
- High Lumen Efficacy
- DLC Standard, ETL listed
- Dimmable (0-10V)
- 50,000 hour life
- High CRI 80+
- Replaces 4 x F32T8 Fixture
- No ballast required
- Polycarbonate diffuser
- Aluminum housing AL6063-T6
- Suitable for damp locations
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Healthcare
- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom



INSTALLATION

- Recessed
- Suspending

ADDITIONAL INFO

- White Trim
- Operating Temperature -20°C ~+40°C

DIAGRAM

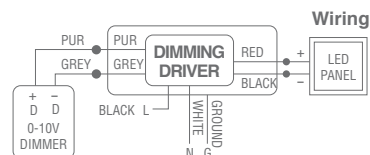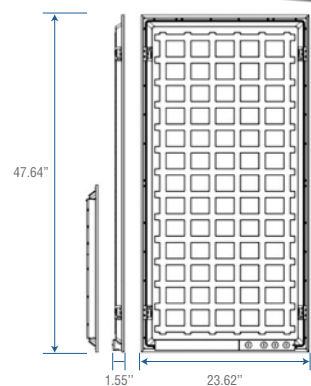

ITEM NO.	MODEL NO.	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	BEAM ANGLE	IP	PF	MOL (IN)	CASE QTY.
L2721-2342	ILX-BLP24-50W-UV-35K	PL0FG50U	BACKLIT PANEL 2X4 50W 120V 35K	50	100-277v	5500	3500K	120°	20	0.9	47.64x23.62x1.55	2
L2762-2343	ILX-BLP24-50W-UV-40K	PJM5N771	BACKLIT PANEL 2X4 50W 120V 40K	50	100-277v	5500	4000K	120°	20	0.9	47.64x23.62x1.55	2

MODEL EXAMPLE

ILX	BLP	24	50W	UV	40K
Brand	Product Type	Size	Wattage	Voltage	CCT
illuminex	Backlit Panel	2=2FT 4=4FT	30W 40W 50W	UV=100-277V	35=3500K 40=4000K 50=5000K

Toronto | Calgary | Halifax

Tel: 1-905-264-6670 Toll Free: 1-844-985-1590 Fax: 1-905-264-6671

Email: csr@illuminexled.com | Website: www.illuminexled.com

Head Office: 1-1 Keyes Court, Vaughan, ON L4H 4V6