

### Illuminate with Safety!

#### Fire-Rated Gimbal Downlight



Beam



Wet Location



Fire Rated



High CRI



Dimmable



## Product information

### FEATURES

- 4" 9W 900lm 36° beam Fire Rated
- UL 263-2011(R2022), ASTM E119-24 and CAN/ULC-S101-14-REV1 Testing on Wood Joist Floor-Ceiling Assembly, Passes Two Layers of Gypsum Board
- Suitable for wet locations
- Energy Star, cETLus listed
- 360° Rotation
- Type IC rated (direct contact with insulation)
- Less than 0.1% defective rate
- Triac Dimmable
- COB Type LED
- 54,000 hour life
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


### INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

### ADDITIONAL INFO

- White Finish
- Operating Temperature -10°C ~+40°C

### DIAGRAM

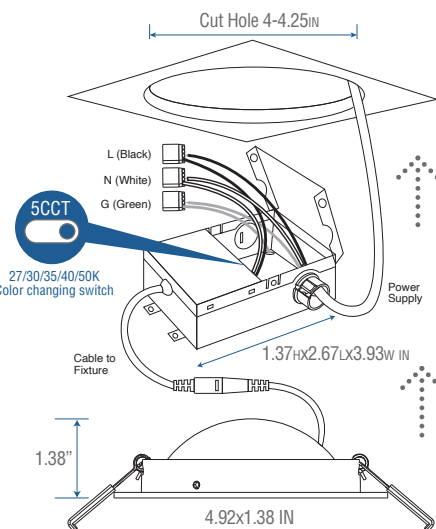

ORDER CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	IP	CRI	PF	CASE QTY.
L3324-1050	4" FIRE RATED GIMBALS 9W 900LM 5CCT FT6	9 W	120 V	900	2700K 3000K 3500K 4000K 5000K	50,000	36°	54	80+	0.98	40

ES ID: 2421066 MODEL: ILX-SG34-9W-5CCT-WF