




The freedom of Color Changing Temperature (CCT)!

Selectable Color Temperatures of 3000K/4000K/5000K

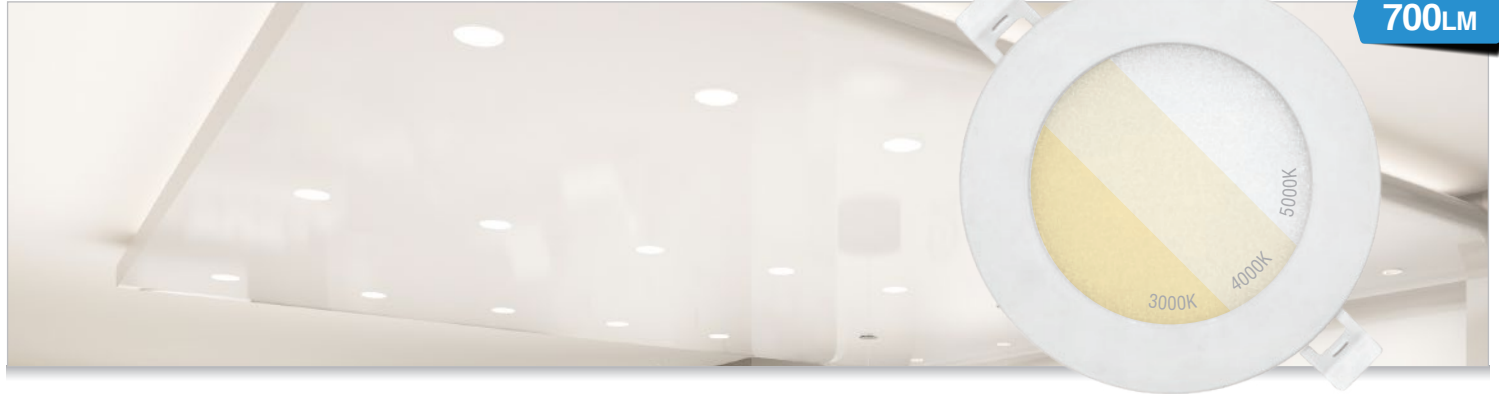

Wet Location



Fire Rated



High CRI



Dimmable



Intertek



ENERGY STAR

Product information

FEATURES

- 4" 9w 700LM¹
- Selectable color temperatures of 3000K/4000K/5000K
- Fire rated 2H FT4 cable
- Suitable for wet locations
- Energy Star, cETLus listed
- Type IC rated (direct contact with insulation)
- Dimmable
- Less than 0.1% defective rate
- 6pcs contractor packaging
- 50,000 hour life
- Acrylic PMMA light guide
- Air-tight aluminum housing
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

ADDITIONAL INFO

- White Finish
- Operating Temperature -20°C ~+40°C

DIAGRAM

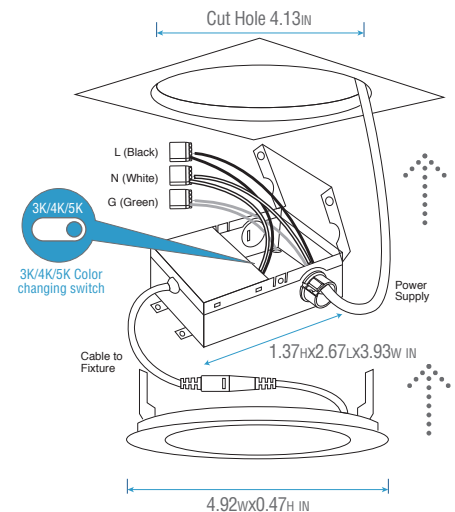

¹750LM @5000K | 700LM @4000K | 650LM @3000K

ORDER CODE	ES MODEL	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	MOL (IN)	MOUNT SIZE	UNIT OF SALE
L3751-0421	ILX-SP-9W-3CCT-WL	4" SLIM PANEL 9W 3CCT WH DIMM	9	120 V	700	3000K/4000K/5000K	50,000	110°	80+	54	4.92	4.2	6
ACCESSORIES													
L3799-1104	SNAP-ON TRIM	BRUSHED NICKEL (BN) 6-PC PACK / FITS ALL 4" ROUND SLIM PANELS DIA 120-125MM (4.72 - 4.92 INCH)											
L3799-1204	SNAP-ON TRIM	BLACK FINISH (BK) 6-PC PACK / FITS ALL 4" ROUND SLIM PANELS DIA 120-125MM (4.72 - 4.92 INCH)											