




TEMPORARY LED HIGH BAY FIXTURE

CATALOG NUMBER KT-TFLED100-850

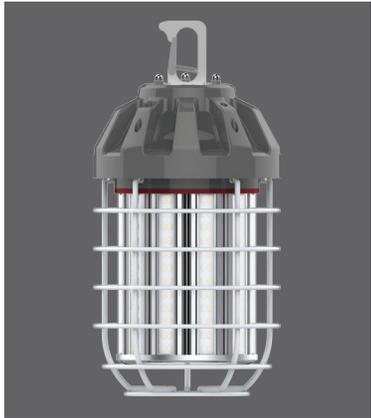

DESCRIPTION

Easy-to-install, portable, flexible, lightweight temporary lighting; 3-prong USA plug



APPLICATION

Used for indoor applications in place of fluorescent shop lights, surface-mount, and/or strip fixtures.


PRODUCT FEATURES

- Omni-Directional Light Distribution
- Efficacy: 115lm/W
- 6KV Surge Protection
- Strong, Durable Construction
- Suitable for Construction Areas, Outdoor Activity Lighting
- IP64 Rated
- Lightweight
- Isolated Driver for Better Heat Dissipation
- Driver with Heat Sink Silicone is Waterproof, Dust-Proof, and Anti-Mosquito
- Operating Temperature: -40°C/-40°F-60°C/140°F

PERFORMANCE SPECIFICATIONS

Catalog Number	Power Consumption	LED Quantity	Power Factor	CRI	Input Voltage	Frequency	Color Temp.	Total Lumens	Metal Halide Equivalent
KT-TFLED100-850	100W	168	≥0.90	≥80	120V	50~60Hz	5000K	11,500	400W

OPERATING SPECIFICATIONS

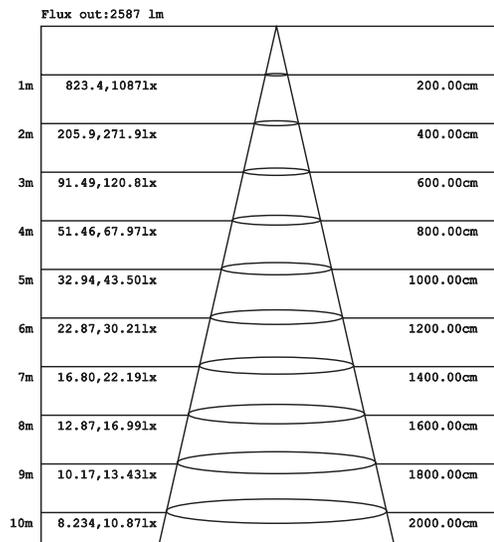




TEMPORARY LED HIGH BAY FIXTURE

CATALOG NUMBER KT-TFLED100-850

PHYSICAL SPECIFICATIONS

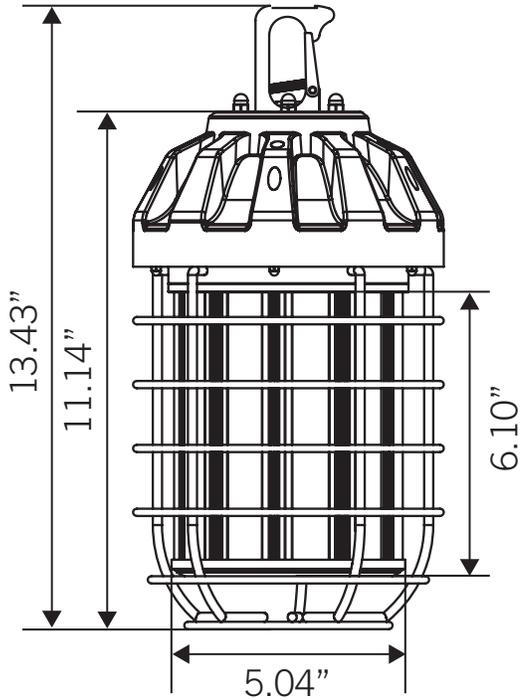

CATALOG NUMBER BREAKDOWN

KT-TFLED100-850

