

Kodak

LED LIGHTING

ENVIR^oMATE

Products Corp.



FILAMENT LIGHT BULB COLLECTION



5W
ITEM# 67000-UL
4 FILAMENTS VERY
WARM WHITE



7.5W
ITEM # 67001-UL
6 FILAMENTS VERY
WARM WHITE

High Color Rendering Index Very warm white 2200K 60 WATT, 90 WATT Halogen Equivalent ST-64 Extra Long Filament

Dimmable

Product Description


This vintage looking light bulb is in the form of the historic original Edison light bulb. This nostalgic bulb is great for chandeliers and sconces. Although this bulb appears antique it uses linear LED filaments and is incredibly energy efficient.

Features

- 30,000 hrs rated life
- Dimmable
- 900 lumens
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
67000-UL	ST-64	Clear	120V	E26	5W	2200K	600	30,000	92	360	Yes
67001-UL	ST-64	Clear	120V	E26	7.5W	2200K	900	30,000	92	360	Yes



3 Inch
4 FILAMENT ITEM
#55037-UL



4 Inch
4 FILAMENT
ITEM #55038-UL



5 Inch
8 FILAMENT
ITEM #55040-UL

40 WATT, 80 WATT Halogen Equivalent

Mirror Globe

Dimmable

Product Description

KODAK LED Lamps provide a 360 degree beam angle. This lamp continues the more than 100 years of tradition of preferring incandescent bulbs. Delivering incandescent-like sparkling light effects, LED Filament bulbs are ideal for general and decorative lighting in the hospitality industry, as well as home environments. The lamp employs Linear LED filaments.

Features

- Dimmable
- True 40W 80W replacement
- Non-flickering
- Single light source for even distribution
- No spotting
- Glare-free
- No UV / No IR
- Instant-on
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55037-UL	G80 3 in	Mirror	120V	E26	4W	2700K	400	30,000	82	360	Yes
55038-UL	G95 4 in	Mirror	120V	E26	4W	2700K	400	30,000	82	360	Yes
55040-UL	G125 5 in	Mirror	120V	E26	7W	2700K	800	30,000	82	360	Yes



60 WATT, 80 WATT Halogen Equivalent A19 LED Filament Mirror

Dimmable

Product Description

KODAK LED Lamps provide a 360 degree beam angle. Delivering incandescent-like sparkling light effects, LED Filament bulbs are ideal for general and decorative lighting in the hospitality industry, as well as home environments. The lamp employs Linear LED filaments.

Features

- 30,000 hrs rated life
- True 60W and 80W replacement
- Dimmable
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction


Aluminum Housing
Clear Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55048-UL	A19	Clear	120V	E26	6W	2700K	600	30,000	82	360	Yes
55049-UL	A19	Clear	120V	E26	7W	2700K	800	30,000	82	360	Yes



2W
ITEM #41116-UL
CANDLE FLAME TIP

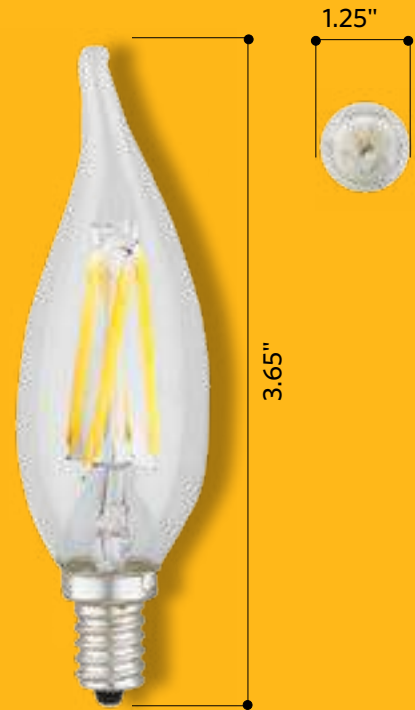

4W
ITEM #41117-UL
CANDLE FLAME TIP

25 WATT 40 WATT Halogen Equivalent Candle Flame Tip

Dimmable

Product Description


Available with a clear lens, these lamps cast light in all directions, including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- 30,000 hrs rated life
- Dimmable
- 200 and 400 lumens
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E12 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41116-UL	Flame Tip	Clear	120V	E12	2W	2700K	200	30,000	82	360	Yes
41117-UL	Flame Tip	Clear	120V	E12	4W	2700K	400	30,000	82	360	Yes



6W

ITEM #55000-UL
TORPEDO 2700 K
CRI 82 WARM
WHITE



6W

ITEM #55001-UL
TORPEDO
2200 K CRI 92 VERY
WARM WHITE



6W

ITEM #55004-UL
TORPEDO 2700K
CRI 82 MILKY
WHITE



6W

ITEM #55005-UL
TORPEDO 2700K
CRI 82 FROSTED

55 WATT Halogen Equivalent Torpedo Collection

Dimmable

Product Description

With clear, milky white and frosted all glass bodies, these lamps cast light in all directions, including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- 30,000 hrs rated life
- Dimmable
- 550 lumens
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E12 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55000-UL	Torpedo	Clear	120V	E12	6W	2700K	550	30,000	82	360	Yes
55001-UL	Torpedo	Clear	120V	E12	6W	2200K	550	30,000	92	360	Yes
55004-UL	Torpedo	White	120V	E12	6W	2700K	550	30,000	82	360	Yes
55005-UL	Torpedo	Frosted	120V	E12	6W	2700K	550	30,000	82	360	Yes



2W
ITEM #41067-UL
CANDLE TORPEDO



4W
ITEM #41063-UL
CANDLE TORPEDO



25 WATT 40 WATT Halogen Equivalent Candle Torpedo

Dimmable

Product Description

Available with a clear lens, these lamps cast light in all directions, including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- 30,000 hrs rated life
- Dimmable
- 200 and 400 lumens
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E12 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41067-UL	Torpedo	Clear	120V	E12	2W	2700K	200	30,000	82	360	Yes
41063-UL	Torpedo	Clear	120V	E12	4W	2700K	400	30,000	82	360	Yes



2W
ITEM # 42082-UL
E12 BASE

25 WATT Halogen Equivalent

Frosted Torpedo Filament

Dimmable

Product Description

Available with a clear lens, these lamps cast light in all directions, including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- 30,000 hrs rated life
- Dimmable
- 200 lumens
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E12



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
42082-UL	Torpedo	Frosted	120V	E12	2W	2700K	200	30,000	82	360	Yes



6W

ITEM #55002-UL
2200K CRI 92
WARM WHITE



6W

ITEM #55003-UL
2700K CRI 82 VERY
WARM WHITE

55 WATT Halogen Equivalent **Candle Flame Tip Collection**

Dimmable

Product Description


Available in clear twisted decorative lens these lamps cast light in all directions. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- 30,000 hrs rated life
- Dimmable
- 550 lumens
- 360 degree lighting
- No UV / No IR
- Operating temperature:
 -10°C to +40°C
 -24° F to +104° F

Construction

Aluminum Housing
 Clear Glass Lens
 E12 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55002-UL	Flame Tip	Clear	120V	E12	6W	2200K	550	30,000	92	360	Yes
55003-UL	Flame Tip	Clear	120V	E12	6W	2700K	550	30,000	82	360	Yes



2W
ITEM #55070-UL
FLAME TIP
FROSTED
E12 BASE



4W
ITEM #55071-UL
FLAME TIP
FROSTED
E12 BASE

25 WATT 40 WATT Halogen Equivalent Candle Flame Tip Frosted

Dimmable

Product Description

Available in a frosted lens these lamps cast light in all directions, including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- 30,000 hrs rated life
- Dimmable
- 200 and 400 lumens
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E12 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55070-UL	Flame Tip	Frosted	120V	E12	2W	2700K	200	30,000	82	360	Yes
55071-UL	Flame Tip	Frosted	120V	E12	4W	2700K	400	30,000	82	360	Yes



2W

ITEM #41144-UL
TORPEDO
AMBER



4W

ITEM #41143-UL
TORPEDO
AMBER



2W

ITEM #42002-UL
FLAME TIP
AMBER



4W

ITEM #42003-UL
FLAME TIP
AMBER

25 WATT

40 WATT Halogen Equivalent

Amber Torpedo & Flame Tip

Dimmable

Product Description

Available in clear twisted decorative lens these lamps cast light in all directions. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- 30,000 hrs rated life
- Dimmable
- 200 and 400 lumens
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E12 Base

Amber Lens Impact

The amber lens reduces the color temperature by 200K. Therefore, 2700K will appear as 2500K.



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41144-UL	Torpedo	Amber	120V	E12	2W	2700K	200	30,000	82	360	Yes
41143-UL	Torpedo	Amber	120V	E12	4W	2700K	400	30,000	82	360	Yes
42002-UL	Flame Tip	Amber	120V	E12	2W	2700K	200	30,000	82	360	Yes
42003-UL	Flame Tip	Amber	120V	E12	4W	2700K	400	30,000	82	360	Yes



2W

ITEM #41148-UL
TORPEDO

CRI 92 - 2200 K
VERY WARM WHITE



4W

ITEM #42055-UL
TORPEDO

CRI 92 - 2200 K
VERY WARM
WHITE



2W

ITEM #41167-UL
FLAME TIP

CRI 92 - 2200 K
VERY WARM
WHITE



4W

ITEM #41168-UL
FLAME TIP

CRI 92 - 2200 K
VERY WARM WHITE

25 WATT

40 WATT Halogen Equivalent

Candle LED Torpedo & Flame Tip Dimmable

Product Description

With a clear all glass body, these lamps cast light in all directions including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- 30,000 hrs rated life
- Dimmable
- 200 and 400 lumens
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E12 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41148-UL	Torpedo	Clear	120V	E12	2W	2200K	200	20,000	92	360	Yes
42055-UL	Torpedo	Clear	120V	E12	4W	2200K	400	30,000	92	360	Yes
41167-UL	Flame Tip	Clear	120V	E12	2W	2200K	200	20,000	92	360	Yes
41168-UL	Flame Tip	Clear	120V	E12	4W	2200K	400	30,000	92	360	Yes



2 Filament
ITEM #42113-UL
A15



4 Filament
ITEM #42114-UL
A15



6 Filament
ITEM #42115-UL
A15



8 Filament
ITEM #42116-UL
A15

25 WAT, 40 WATT 60 WATT, 75 WATT Halogen Equivalent A15 LED Multi-Filament

Dimmable

Product Description

KODAK LED Filament Lamps provide a 360 degree beam angle, delivering incandescent-like sparkling light effects. Well suited for lighting in the hospitality industry, as well as home environments.

Features

- 30,000 hrs rated life
- True 25W, 40W, 60W, 75W, replacement
- Dimmable
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
42113-UL	A15	Clear	120V	E26	2W	2700K	200	30,000	82	360	Yes
42114-UL	A15	Clear	120V	E26	4W	2700K	400	30,000	82	360	Yes
42115-UL	A15	Clear	120V	E26	6W	2700K	600	30,000	82	360	Yes
42116-UL	A15	Clear	120V	E26	8W	2700K	800	30,000	82	360	Yes



4 Filament
ITEM # 41068-UL



6 Filament
ITEM # 41070-UL



8 Filament
ITEM # 41181-UL



10 Filament
ITEM # 41145-UL

**25 WATT, 60 WATT,
75 WATT, 100 WATT** Halogen Equivalent

A19 LED Multi-Filament

Dimmable

Product Description


KODAK LED Filament Lamps provide a 360 degree beam angle, delivering incandescent-like sparkling light effects. Well suited for lighting in the hospitality industry, as well as home environments.

Features

- 30,000 hrs rated life
- True 25W, 60W, 75W & 100W replacement
- Dimmable
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41068-UL	A19	Clear	120V	E26	4.0W	2700K	400	30,000	82	360	Yes
41070-UL	A19	Clear	120V	E26	6.0W	2700K	600	30,000	82	360	Yes
41181-UL	A19	Clear	120V	E26	7.0W	2700K	800	30,000	82	360	Yes
41145-UL	A19	Clear	120V	E26	8.0W	2700K	900	30,000	82	360	Yes



6W
ITEM # 42045-UL

60 WATT Halogen Equivalent A19 LED Filament Amber

Dimmable

Product Description

KODAK LED Filament Lamps provide a 360 degree beam angle, delivering incandescent-like sparkling light effects. Well suited for lighting in the hospitality industry, as well as home environments.

Features

- 30,000 hrs rated life
- True 60W
- Dimmable
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
42045-UL	A19	Amber	120V	E26	6W	2700K	600	30,000	82	360	Yes



2W
ITEM # 41085-UL
CLEAR



2W
ITEM # 42061-UL
AMBER

4W
ITEM # 42062-UL
AMBER

25 WATT, 40 WATT Halogen Equivalent S14 Clear and Amber

Dimmable

Product Description

This vintage looking light bulb is in the form of the historic original Edison light bulb. This nostalgic bulb is great for chandeliers and sconces. Although this bulb appears antique it uses linear LED filaments and is incredibly energy efficient.

Features

- 30000 hrs rated life
- Dimmable
- 200 - 400 lumens
- 360 degree lighting
- 2700k warm white
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E26 Base

Amber Lens Impact

The amber lens reduces the color temperature by 200K. Therefore, 2700K will appear as 2500K.



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41085-UL	S-14	Clear	120V	E26	2W	2700K	200	30,000	82	360	Yes
42061-UL	S-14	Amber	120V	E26	2W	2700K	200	30,000	82	360	Yes
42062-UL	S-14	Amber	120V	E26	4W	2700K	400	30,000	82	360	Yes



4 Filaments
ITEM #41098-UL



6 Filaments
ITEM #41100-UL

64MM Diameter

2.5"



8 Filaments
ITEM #42081-UL



5.375"

40 WATT, 60 WATT, 80 WATT Halogen Equivalent ST-64 Clear

Dimmable

Product Description


This vintage looking light bulb is in the form of the historic original Edison light bulb. This nostalgic bulb is great for chandeliers and sconces. Although this bulb appears antique it uses linear LED filaments and is incredibly energy efficient.

Features

- 30000 hrs rated life
- Dimmable
- 400 - 900 lumens
- 360 degree lighting
- 2700k warm white
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41098-UL	ST-64	Clear	120V	E26	4W	2700K	400	30,000	80	360	Yes
41100-UL	ST-64	Clear	120V	E26	6W	2700K	600	30,000	80	360	Yes
42081-UL	ST-64	Clear	120V	E26	8W	2700K	800	30,000	80	360	Yes



4W
ITEM # 41099
ITEM # 41099-UL



8W
ITEM # 42004
ITEM # 42004-UL



40 WATT, 80 WATT Halogen Equivalent

ST-64 Amber

Dimmable

Product Description

This vintage looking light bulb is in the form of the historic original Edison light bulb. This nostalgic bulb is great for chandeliers and sconces. Although this bulb appears antique it uses linear LED filaments and is incredibly energy efficient.

Features

- 30,000 hrs rated life
- Dimmable
- 400 to 800 lumens
- 360 degree lighting
- 2700k warm white
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Amber Glass Lens
E26 Base

Amber Lens Impact

The amber lens reduces the color temperature by 200K. Therefore, 2700K will appear as 2500K.



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41099-UL	ST-64	Amber	120V	E26	4W	2700K	400	30,000	80	360	Yes
42004-UL	ST-64	Amber	120V	E26	8W	2700K	800	30,000	80	360	Yes

30mm Diameter
1.25"



6W

ITEM #55018-UL
EXTRA LONG

40 WATT Halogen Equivalent T-30 Diagonal Clear

Dimmable

Product Description

This tubular LED lamp uses linear LED filaments. Comes in various wattages. Energy saving.

Features

- 30,000 hrs rated life
- Dimmable
- 600 lumens
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55018-UL	T-30 Extra Long	Clear	120V	E26	6W	2700	600	30,000	82	360	Yes



4W
ITEM # 41083-UL
E12 BASE



4W
ITEM # 41121-UL
E26 Base



4W
ITEM # 55032-UL
AMBER

40 WATT Halogen Equivalent G16.5 Clear and Amber 2 Inch Globe **Dimmable**

Product Description

KODAK LED Filament LED Lamps provide a 360 degree beam angle. Delivering incandescent-like sparkling light effects, KODAK LED Filament bulbs are ideal for general and decorative lighting in the hospitality industry, as well as home environments. The lamp employs linear LED filaments.

Features

- 30,000 hrs rated life
- Dimmable
- 400 lumens
- 360 degree lighting
- 2700k warm white
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E12 and E26 Base

Amber Lens Impact

The amber lens reduces the color temperature by 200K. Therefore, 2700K will appear as 2500K.



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41121-UL	G16.5	Clear	120V	E26	4W	2700K	400	30,000	82	360	Yes
41083-UL	G16.5	Clear	120V	E12	4W	2700K	400	30,000	82	360	Yes
55032-UL	G16.5	Amber	120V	E26	4W	2700K	400	30000	80	360	Yes



2W

ITEM # 41120-UL
E26 BASE

4W

ITEM # 41121-UL
E26 BASE

25 WATT, 40 WATT Halogen Equivalent 2 inch Globes

Dimmable

Product Description


KODAK LED Filament LED Lamps provide a 360 degree beam angle. Delivering incandescent-like sparkling light effects, KODAK LED Filament bulbs are ideal for general and decorative lighting in the hospitality industry, as well as home environments. The lamp employs linear LED filaments.

Features

- 30,000 hrs rated life
- Dimmable
- 200, and 400 lumens
- 360 degree lighting
- 2700k warm white
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
41120-UL	2 inch G16.5 Clear		120V	E26	2W	2700K	200	30,000	82	360	Yes
41121-UL	2 inch G16.5 Clear		120V	E26	4W	2700K	400	30,000	82	360	Yes



8 Filaments
ITEM #55034-UL

80 WATT Halogen Equivalent **G125 5 inch Globe**

Dimmable

Product Description


KODAK LED Lamps provide a 360 degree beam angle. Delivering incandescent-like sparkling light effects, LED Filament bulbs are ideal for general and decorative lighting in the hospitality industry, as well as home environments. The lamp employs linear LED filaments.

Features

- 30,000 hrs rated life
- Dimmable
- 800 lumens
- 360 degree lighting
- 2700k warm white
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55034-UL	G125 5 in	Clear	120V	E26	7W	2700K	800	30,000	82	360	Yes



4W
ITEM #42079-UL
S14



5W
ITEM #42077-UL
4 INCH GLOBE
G95

High Color Rendering Index Very warm white 2200K S14 & G95 Dimmable

Product Description


With a clear all glass body, these lamps cast light in all directions including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots. With 92 CRI and 2200K these lamps produce a warmer illumination.

Features

- Dimmable
- 360 degree lighting
- Warmer illumination
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
42079-UL	S-14	Clear	120V	E26	4W	2200K	400	30,000	92	360	Yes
42077-UL	G95	Clear	120V	E26	5W	2200K	500	30,000	92	360	Yes



6W

**ITEM #42073-UL
A19**

High Color Rendering Index Very warm white 2200K **A19** **Dimmable**

Product Description

With a clear all glass body, these lamps cast light in all directions including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots. With 92 CRI and 2200K these lamps produce a warmer illumination.

Features

- Dimmable
- 360 degree lighting
- Warmer illumination
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
42073-UL	A19	Clear	120V	E26	6W	2200K	600	30,000	92	360	Yes

45mm Diameter



2W

ITEM # 42000-UL



4W

ITEM # 42001-UL

25 WATT, 40 WATT Halogen Equivalent T-45 Filament

Dimmable

Product Description

This tubular LED lamp uses linear LED filaments. Comes in various wattages. Energy saving.

Features

- 30,000 hrs rated life
- Dimmable
- 200 - 400 lumens
- 360 degree lighting
- 2700k warm white
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Glass Lens
E26 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
42000-UL	T-45	Clear	120V	E26	2W	2700K	200	30,000	82	360	Yes
42001-UL	T-45	Clear	120V	E26	4W	2700K	400	30,000	82	360	Yes



10W
ITEM #55046-UL



10 WATT Halogen Equivalent **All Glass Body** **C7 Christmas Light LED Torpedo**

Dimmable

Product Description


With a clear all glass body these lamps cast light in all directions, including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots.

Features

- Dimmable
- True 10W replacement
- Non-flickering
- Available in Medium Base E12
- No UV/No IR
- Instant-on
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Glass Lens
E12 Base



ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55046-UL	Torpedo	Clear	120V	E12	.5W	2700K	50	30,000	82	360	Yes



4W

ITEM #42107-UL
E12 BASE MILKY



4W

ITEM #42107-UL
E12 BASE
MILKY

40 WATT Halogen Equivalent Milky Torpedo & Flame Tip

Dimmable

Product Description

With an all glass body, these lamps cast light in all directions including down. Light is properly centered so chandeliers and shaded fixtures illuminate with no shadowing or dark spots. With 92 CRI and 2700K these lamps produce a warm illumination.

Features

- Dimmable
- 360 degree lighting
- No UV / No IR
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Milky White Glass Lens
E12 Base



(CRI 92 - 2700K)
High Color Rendering Index
Warm white 2700K

ITEM No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
42107-UL	Torpedo	Milky	120V	E12	4W	2700K	400	30,000	92	360	Yes
42108-UL	Flame	Milky	120V	E12	4W	2700K	400	30,000	92	360	Yes



18W
ITEM # 41023
T8 TUBE LIGHT
48 INCHES

Equivalent to F32 Fluorescent Tube LED T8 Tube Light

Product Description

The KODAK LED Commercial Grade LED T8 replacement lamps are an energy saving LED alternative to traditional T8 fluorescent lamps.

This lamp combines innovative optical and mechanical design features to achieve a light distribution similar to traditional fluorescent lamps while consuming less electrical power.

The Commercial Grade LED T8 replacement lamp has a dedicated isolated internal driver and is designed to be a direct fluorescent replacement. The isolated driver will allow the LED tube to last longer.

Features

- 30000 hrs rated life
- Non-Dimmable
- 1800 lumens
- 120 degree beam angle
- Cool white
- Lower installation cost
- Driver will last longer
- No need to rewire the fixture
- No need to remove the ballast
- No UV / No IR
- Instant On
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

- Instant Fit
- No Ballast Rewiring Required
- Electronic Ballast Compatible
- Isolated Driver



Item No.	Form	Length	Input	Watts	CCT	Lumens	Base	Rated Life (hrs)	CRI	Beam Angle	Dimming	Fluorescent Equiv
41023	Tube Light	48 Inches	120V	18W	4100K	1800	G13	30,000	82	120	No	32W



18W
ITEM # 41034
T8 TUBE LIGHT
48 INCHES

LED T8 Tube Light

Product Description

The KODAK LED Commercial Grade LED T8 replacement lamps are an energy saving LED alternative to traditional T8 fluorescent lamps.

This lamp combines innovative optical and mechanical design features to achieve a light distribution similar to traditional fluorescent lamps while consuming less electrical power.


Features

- Length - 48 Inches
- 30000 hrs rated life
- Non-Dimmable
- 1800 Lumens
- 120 degree beam angle
- Cool white
- No UV / No IR
- Instant On
- Operating temperature:
 -10°C to +40°C
 -24° F to +104° F

- Ballast Rewiring Is Necessary



Item No.	Form	Length	Input	Watts	CCT	Lumens	Base	Rated Life (hrs)	CRI	Beam Angle	Dimming	Fluorescent Equiv
41034	Tube Light	48 Inches	120V	18W	4100K	1800	G13	30,000	82	120	No	32W



11W
ITEM # 42302
BR30

75 WATT Halogen Equivalent BR30

Dimmable

Product Description


Best replacement lamp for ceiling downlights. Milky Lens "hides" into the ceiling can and provides desirable soft, warm light. Wide flood illumination, not for outdoor use.

Features

- Dimmable
- True 75W replacement
- Non-flickering
- Plastic body
- No spotting, wide flood
- Glare-free
- No UV / No IR
- Instant-on
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Plastic Housing
Soft White Acrylic Lens
E26 Base



Item No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
42302	BR30	White	120V	E26	11W	3000K	800	30,000	82	180	Yes



18W
ITEM # 55067
BR40

120 WATT Halogen Equivalent BR40

Dimmable

Product Description


Best replacement lamp for ceiling down lights. Milky Lens "hides" into the ceiling can and provides desirable soft, warm light. Wide flood illumination, not for outdoor use.

Features

- Dimmable
- True 120W replacement
- Non-flickering
- No spotting, wide flood
- Glare-free
- No UV / No IR
- Instant-on
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Soft White Acrylic Lens
E26 Base



Item No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55067	BR40	White	120V	E26	18W	2700K	1400	25,000	80	110	Yes



8W COB
ITEM # 40505
PAR20

50 WATT Halogen Equivalent Par20

Dimmable

Product Description


Compact flood provides the same light as a 50W Incandescent. Robust heat sink provides consistent output and increases life.

Features

- Dimmable
- True 50W Replacement
- Non-flickering
- Single light source for even distribution. No spotting
- Narrow Flood
- Glare-free
- No UV / No IR
- Instant-on
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear PMMA lens
E26 Medium Base



Item No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
40505	Par20	Clear	120V	E26	8W	3000K	500	30,000	82	38	Yes



11W
ITEM # 40506
PAR30

75 WATT Halogen Equivalent Par30

Dimmable

Product Description


Compact flood provides the same light as a 75W Incandescent. Robust heat sink provides consistent output and increases life.

Features

- Dimmable
- True 50W Replacement
- Non-flickering
- Single light source for even distribution. No spotting
- Narrow Flood
- Glare-free
- No UV / No IR
- Instant-on
- Operating temperature:
-10°C to +40°C
-24° F to +104° F

Construction

Aluminum Housing
Clear PMMA lens
E26 Medium Base



Item No.	Form	Lens	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
40506	Par30	Clear	120V	E26	11W	3000K	800	30,000	82	38	Yes



IP64 Mogul Base LED Corn Light

Non-Dimmable and Dimmable

Product Description

This high efficiency Corn Light will achieve 106lm/W IP64. High quality Aluminum material heat dissipation. Working environment temperature: -30~65 celsius degree. Streamline exterior design, beautiful appearance. CE, TUV, PSE, UL, ISO9001-2008


Operating temperature:

-10°C to +40°C

-24° F to +104° F

**MOGUL
BASE**

100 WATT HPS, MH Replacement
150 WATT HPS, MH Replacement
250 WATT HPS, MH Replacement
350 WATT HPS, MH Replacement
400 WATT HPS, MH Replacement



ITEM No.	Form	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	Measurements	CRI	Beam Angle	Dimming
41073	Corn	AC85-265V/277V	E39	45W	3500K	3500	30,000	3.66"Dx8.42"H	80	360	No
41146	Corn	AC85-265V/277V	E39	45W	3500K	3500	30,000	3.66"Dx8.42"H	80	360	Yes
41087	Corn	AC85-265V/277V	E39	54W	3500K	5600	30,000	3.66"Dx8.42"H	80	360	No
41133	Corn	AC85-265V/277V	E39	54W	3500K	5600	30,000	3.66"Dx8.42"H	80	360	Yes
41088	Corn	AC85-265V/277V	E39	80W	3500K	8000	30,000	4.75"Dx11.70"H	80	360	No
41134	Corn	AC85-265V/277V	E39	80W	3500K	8000	30,000	4.75"Dx11.70"H	80	360	Yes
41089	Corn	AC85-265V/277V	E39	100W	3500K	10080	30,000	4.72"Dx13.26"H	80	360	No
41135	Corn	AC85-265V/277V	E39	100W	3500K	10080	30,000	4.72"Dx13.26"H	80	360	Yes
41090	Corn	AC85-265V/277V	E39	125W	3500K	12000	30,000	4.72"Dx16.22"H	80	360	No
41136	Corn	AC85-265V/277V	E39	125W	3500K	12000	30,000	4.72"Dx16.22"H	80	360	Yes



220W
ITEM # 55077
LED CORN LIGHT

250W
ITEM # 55078
LED CORN LIGHT

300W
ITEM # 55088
LED CORN LIGHT

IP64 Mogul Base LED Corn Light


Non-Dimmable

Product Description

This high efficiency Corn Light will achieve 106lm/W IP64. High quality Aluminum material heat dissipation. Working environment temperature: -30~65 celsius degree. Streamline exterior design, beautiful appearance. CE, TUV, PSE, UL, ISO9001-2008

Operating temperature:
-10°C to +40°C
-24° F to +104° F

**MOGUL
BASE**



ITEM No.	Form	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	CRI	Beam Angle	Dimming
55077	Corn	AC85-265V/277V	E39	220W	6000K	22,000	30,000	80	360	No
55078	Corn	AC85-265V/277V	E39	250W	6000K	25,000	30,000	80	360	No
55088	Corn	AC85-265V/277V	E39	300W	6000K	30,000	30,000	80	360	No



Medium Base LED Corn Light


Non-Dimmable and Dimmable

Product Description

This high efficiency Corn Light will achieve 106lm/W IP64. High quality Aluminum material heat dissipation. Working environment temperature: -30~65 celsius degree. Streamline exterior design, beautiful appearance. CE, TUV, PSE, UL, ISO9001-2008

Operating temperature:
-10°C to +40°C
-24° F to +104° F

MEDIUM BASE



ITEM No.	Form	Input	Base	Watts	CCT	Lumens	Rated Life (hrs)	Measurements	CRI	Beam Angle	Dimming
55023	Corn	AC85-265V/277V	E26	45W	3500K	3,500	30,000	3.66"Dx8.42"H	80	360	No
55024	Corn	AC85-265V/277V	E26	54W	3500K	5,600	30,000	3.66"Dx8.42"H	80	360	No
55025	Corn	AC85-265V/277V	E26	80W	3500K	8,000	30,000	4.75"Dx11.70"H	80	360	No
55026	Corn	AC85-265V/277V	E26	100W	3500K	10,080	30,000	4.72"Dx13.26"H	80	360	No
55027	Corn	AC85-265V/277V	E26	125W	3500K	12,000	30,000	4.72"Dx16.22"H	80	360	No

Kodak

LED LIGHTING

