

# LED Chandelier

# CH71840

INSTALLATION SHEET

## START FROM HERE

- Make sure power is completely off at the fuse box.
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area.
- Wear gloves at all times during this installation.
- Read instructions carefully before you start assembly.
- Keep this instruction sheet for future reference.

## Please Note:

- For dimming, an ELV (Electronic Low Voltage) or a TRIAC type of dimmer is required.

Technical Support: 1-877-452-6858

1. Remove the fixture from its original packaging. Remove the mounting crossbar (1d) from within the canopy (2a) by removing the decorative nuts (2b). Secure the mounting crossbar (1d) to the junction box (1a) with the screws (1g) provided in the hardware package.
2. Install all of the bubble acrylic (3b) to the pendant hub (3a) by threading in clockwise until it is safe and secured. (See Illustration 1 for glass color coding)
3. To remove some of the rods (2d), disconnect the wires from the DC Driver located inside the canopy (2a). Remove the driver cover and unscrew to loosen the wires from the terminal block. Push the wires toward the driver from the connector (2c) and remove the rods of your choice. Remove the driver to have enough space for wire connection (Shorten the wires if required). Connect the wires back to the same connection. **Black to positive and White to negative (See Illustration 2 and refer to the diagram on the Driver)**. Reinstall back the driver to the same position as before. Connect the rods (2d) together by threading clockwise starting from the hub (3a) up to the top. Attach the rod (2d) with the fixture to the swivel connector (2c) by threading in clockwise.
4. First connect all wires correctly G ground to ground, N neutral wire (white to white), L live wire (black to black) with provided marrettes (1b) from the hardware package. Align the holes in the canopy (2a) to the screws (1c) pointing down from the mounting crossbar (1d). Push the canopy up towards the ceiling and use the decorative nuts (2b) to secure the canopy onto the mounting crossbar.
5. You have now completed the installation of your fixture, enjoy.

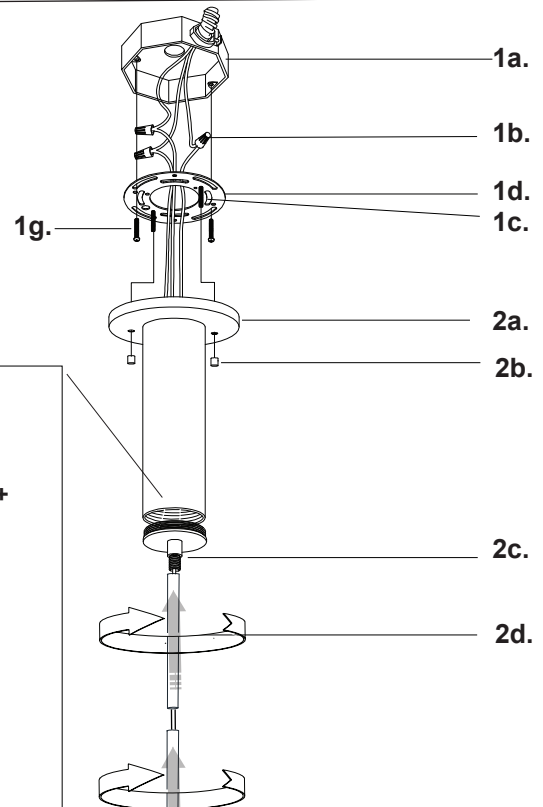


Illustration 2


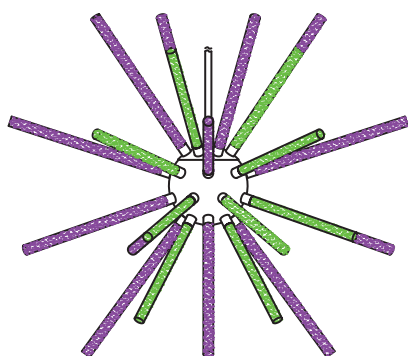


Illustration 1

Size A (Green)  
11-5/8" Glass

Size C (Purple)  
15-3/4" Glass

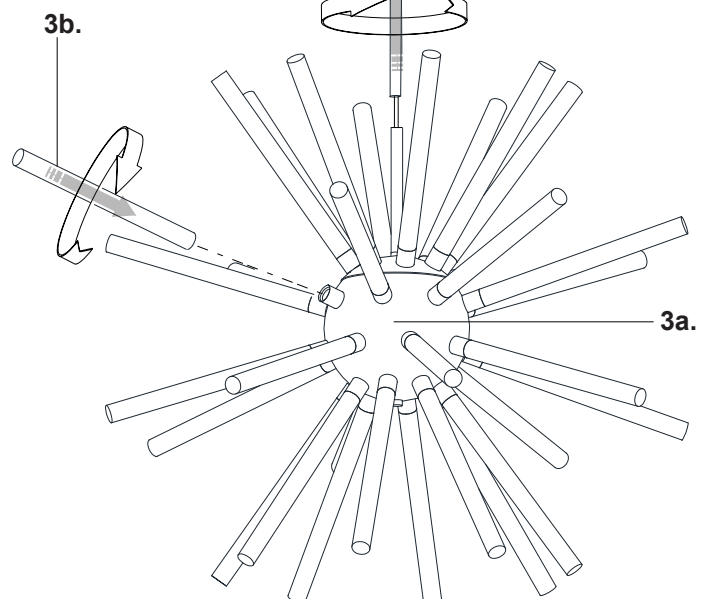

# KUZCO

LIGHTING

19054 28th Avenue Surrey, BC Canada V3S 6M3  
T: 604 538 7162 TF: 1-855 85 KUZCO F: 604 538 7196  
W: kuzcolighting.com  
20160414