

# SYLVANIA Luminaires

## UltraLED™ Mini Wallpack

### Application

The UltraLED Mini Wallpack luminaires are environmentally preferable LED alternatives to traditional HID luminaires, offering up to 70% in energy savings. Ideal in place of traditional luminaires, or as new installations, the Mini wall pack series is offered in several wattages/lumen packages for illuminating building exteriors, outdoor corridors, walkways, and stairwells.

### Benefits and Features

- CCT Selectable (3000K, 4000K, or 5000K) enabled through switch located inside fixture
- IP65 rated body with aluminum backplate and polycarbonate lens offers easy mounting, reducing installation and maintenance costs
- High color rendering and DLC Premium listing ensure energy efficiency and provide uniform and even lighting
- Photosensor included provides additional energy savings
- Up to 130 LPW
- Selectable CCT of 3000, 4000, or 5000K
- CRI >80
- Offered in 15 and 30 watts
- Non-cutoff distribution
- Energy savings up to 70%

### Electrical

- 120-277V<sub>AC</sub>
- Power Factor >90%
- THD <20%
- 0-10V dimmable

### Rated Life

- 150,000 hours (L<sub>70</sub>)

### Warranty

- 5-year

### Ambient Operating Range

- -40°F to +104°F (-40°C to +40°C)

Item #
Type
Project
Notes
Date



### Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
23W CFL	23	15	35%
35W HPS	45	15	67%
42W CFL	46	15	67%
100W Incandescent	100	30	68%
150W Incandescent	150	30	70%

### Certifications and Listings

- cULus
- RoHS
- FCC
- DLC Premium
- IP65

### Installation

- Luminaire mounts to recessed outlet box or can be surface mounted



## Ordering Guide


MWALPAKN	1A	/	XXX	UNV	D	SC2	/	BZ	/	P
Product Name	Generation		Wattage	Voltage	Dimming	Color Temp		Color/Finish		Options
MWALPAKN = Non-cutoff Mini Wallpack	1A = Generation 1A		015 = 15 Watts 030 = 30 Watts	UNV = 120-277V	D = 0-10V Dimming	SC2 = selectable CCT of 3000, 4000 or 5000K		BZ = Bronze		Blank = no option P = Photocell

## Ordering Information

Item Number	Ordering Abbreviation	Power (W)	Input Voltage (V)	Dimming	CRI	Color Temp	Total Fixture Lumens	LPW	Options	DLC
62173	MWALPAKN1A/015UNVDSC2/BZ/P	15	120-277	0-10V	>80	3000, 4000 or 5000K	1950	130	Photocontrol	Prm
62175	MWALPAKN1A/030UNVDSC2/BZ/P	30	120-277	0-10V	>80	3000, 4000 or 5000K	3900	130	Photocontrol	Prm

## Physical Information

Lamp Description	(A) Length in (mm)	(B) Width in (mm)	(C) Height in (mm)
MWALPAKN1A	8.6 (218.4)	5.8 (147.3)	3.1 (78.7)

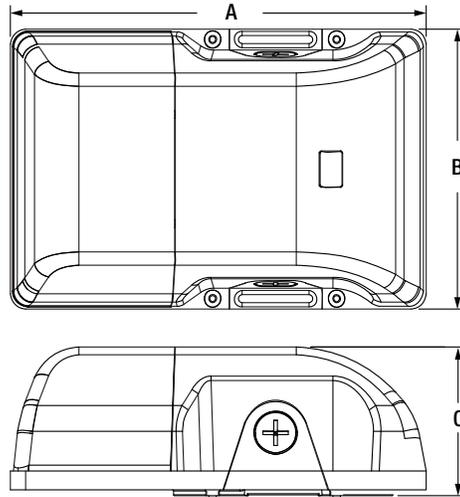

LEDVANCE LLC  
 200 Ballardvale Street  
 Wilmington, MA 01887 USA  
 Phone 1-800-LIGHTBULB (1-800-544-4828)  
 www.sylvania.com

Name: \_\_\_\_\_  
 Email: \_\_\_\_\_  
 Phone: \_\_\_\_\_

SYLVANIA and LEDVANCE are registered trademarks.  
 All other trademarks are those of their respective owners.  
 Licensee of product trademark SYLVANIA in general lighting.  
 Specifications subject to change without notice.

[/sylvania](#) [/sylvania](#)

