

SYLVANIA Luminaires

UltraLED™ CCT Selectable Non-Cutoff Wall Pack

Application

The Wall Pack luminaires are environmentally preferable LED alternatives to traditional HID luminaires, offering up to 78% in energy savings. Ideal in place of traditional luminaires, or as new installations, the Wall Pack series is offered in several wattages/lumen packages for illuminating building exteriors, outdoor corridors, walkways, and stairwells.

Benefits and Features

- DLC Premium listing and wattage and lumen selectability provide high energy efficacy and optimize this product for utility rebates
- Integral Photocontrol included
- Optional Emergency Battery Back-up on selected wattages
- Traditional sizes allow seamless replacement of existing luminaires
- Borosilicate glass lens for solid photometric performance over time
- Up to 150 LPW
- 3000K, 4000K and 5000K color temperatures
- CRI >80
- Offered in 29, 40, 60, 80 or 120 watts
- Energy savings up to 78%

Electrical

- 120-277V_{AC}, 120-347V_{AC} and 277-480V_{AC}
- Power Factor >90%
- THD <20%
- 0-10V dimmable (if applicable)

Rated Life

- 150,000 hours (L₇₀@25°C)

Warranty

- 5-year
- NLB Trusted Warranty Program

Ambient Operating Range

- -40°F to +122°F (-40°C to +50°C)
- 32°F to +122°F (0°C to +50°C) – Emergency versions

Certifications and Listings

- cULus
- FCC
- RoHS
- DLC Premium

Item #

Type

Project

Notes

Date

29W



40/60/80W



120W



Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings
70W HPS	91	29	68%
100W HPS	120	29	76%
100W MH	130	29	78%
70W HPS	91	40	56%
100W HPS	120	40	67%
100W MH	130	40	69%
150W HPS	170	60	65%
150W MH	188	60	68%
175W MH	210	60	71%
175W MH	210	80	62%
250W MH	290	80	72%
250W HPS	295	80	73%
320W MH	370	120	68%
400W HPS	460	120	74%
400W MH	450	120	73%

Installation

- Luminaire mounts to exterior wall.



Ordering Guide

WALPAKN	5X	/	XXX	UNV	D	8	SC2	/	BZ	/	XX
Product Name	Generation/Size*		Wattage	Voltage	Dimming	CRI	Color Temp		Color/Finish		Options
WALPAKN = Non-Cutoff Wall Pack	5A, 5B, 5C		029 = 29 Watts 040 = 40 Watts 060 = 60 Watts 080 = 80 Watts 120 = 120 Watts	UNV = 120-277V UNH = 120-347V HUV = 277-480V	D = 0-10V dimming	8 = >80	SC2 = 3000K, 4000K or 5000K		BZ = Bronze		P = Photocontrol PE = Photocontrol + Emergency Battery Back-up

*5A = 29W only
5B = 40, 60 or 80W
5C = 120W only


Ordering Information

Item Number	Ordering Abbreviation	Wattage (W)	Input Voltage (V)	Dimming	CRI	Color Temperature (CCT)	Total Fixture Lumens	LPW	Color	DLC	Option Included
61838	WALPAKN5A/029UNVD8SC2/BZ/P	29	120-277	0-10V	>80	3000, 4000 or 5000K	3700	135	Bronze	Premium	Photocontrol
61828	WALPAKN5B/040UNVD8SC2/BZ/P	40	120-277	0-10V	>80	3000, 4000 or 5000K	5400	135	Bronze	Premium	Photocontrol
61829	WALPAKN5B/060UNVD8SC2/BZ/P	60	120-277	0-10V	>80	3000, 4000 or 5000K	8100	135	Bronze	Premium	Photocontrol
61830	WALPAKN5B/080UNVD8SC2/BZ/P	80	120-277	0-10V	>80	3000, 4000 or 5000K	12,000	150	Bronze	Premium	Photocontrol
61840	WALPAKN5C/120UNVD8SC2/BZ/P	120	120-277	0-10V	>80	3000, 4000 or 5000K	16,200	135	Bronze	Premium	Photocontrol
61831	WALPAKN5B/040UNVD8SC2/BZ/PE	40	120-277	0-10V	>80	3000, 4000 or 5000K	5400	135	Bronze	Premium	Photocontrol + Emergency Battery Back-up
61839	WALPAKN5A/029UNVD8SC2/BZ/PE	29	120-277	0-10V	>80	3000, 4000 or 5000K	3700	135	Bronze	Premium	Photocontrol + Emergency Battery Back-up
61832	WALPAKN5B/060UNVD8SC2/BZ/PE	60	120-277	0-10V	>80	3000, 4000 or 5000K	8100	135	Bronze	Premium	Photocontrol + Emergency Battery Back-up
62525	WALPAKN5B/040UNHD8SC2/BZ/P	40	120-347	0-10V	>80	3000, 4000 or 5000K	5400	135	Bronze	Premium	Photocontrol
62526	WALPAKN5B/060UNHD8SC2/BZ/P	60	120-347	0-10V	>80	3000, 4000 or 5000K	8100	135	Bronze	Premium	Photocontrol
62902	WALPAKN5B/080UNHD8SC2/BZ/P	80	120-347	0-10V	>80	3000, 4000 or 5000K	12,000	150	Bronze	Premium	Photocontrol
62903	WALPAKN5C/120HUV8SC2/BZ/P	120	277-480	0-10V	>80	3000, 4000 or 5000K	16,200	135	Bronze	Premium	Photocontrol


Physical Information

Lamp Description	Length (inches)	Width (inches)	Height (inches)
29W	10.7	8.3	7.7
40W	14.4	9.3	7.4
60W	14.4	9.3	7.4
80W	14.4	9.3	7.4
120W	17.9	9	9.4


5A

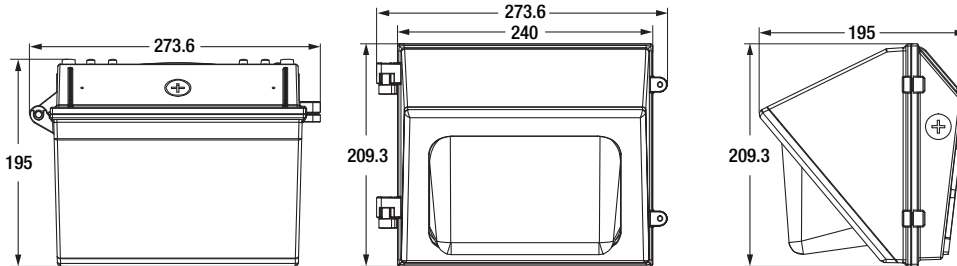

5B

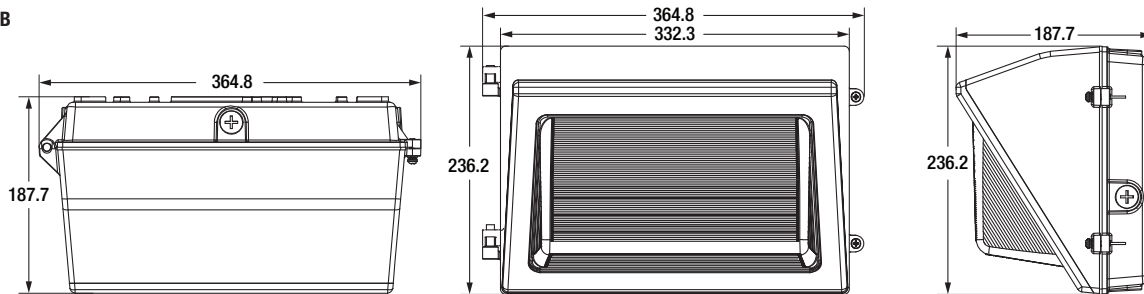

5C

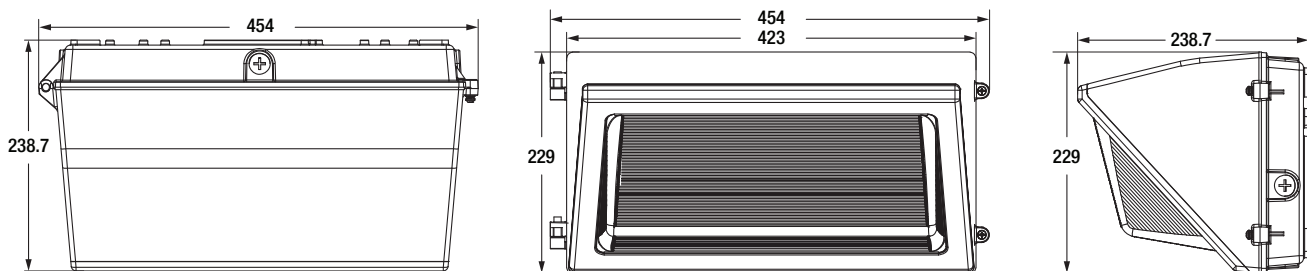

Dimensions in mm

LEDVANCE LLC
 200 Ballardvale Street
 Wilmington, MA 01887 USA
 Phone 1-800-LIGHTBULB (1-800-544-4828)
www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks.
 All other trademarks are those of their respective owners.
 Licensee of product trademark SYLVANIA in general lighting.
 Specifications subject to change without notice.



Name: _____

Email: _____

Phone: _____

