

## FS/FD Mount Weatherproof Covers

For strap mount and flanged devices in FD box and panel mount applications



Available in gray,  
black or yellow

### Features & Benefits

- Vertical self-closing lid constructed of glass-filled thermoplastic provides ultimate impact resistance for use in abusive environments
- Includes provision for 2 padlocks for OSHA compliant lockout/tagout
- Molded-in label area on cover allows for circuit or ratings identification
- Pre-assembled gasket provides an easier installation and tighter seal from harsh elements
- Stainless steel mounting screws and springs offer added corrosion resistance
- NEMA Type 3R and IP64 ratings with cover closed ensure protection for indoor and outdoor use
- Covers may be held open with a Hex Key or pin to ease installation

### Common Applications

- Portable Generators
- Shipyards & Marinas
- Power Distribution Boxes
- Construction Sites
- Carnivals & Fairs

Key Features

			
Provisions for lockout/tagout for OSHA compliance	Convenient space for circuit id label	Pre-mounted flange gasket speeds installation*	Stay open feature makes installation simple

**7420**  
Fits 20A & 30A strap mount single locking receptacles




**WP1**  
Fits 15A locking flanged inlets & outlets and 15A/20A straight blade flanged inlets & outlets




**WP2**  
Fits 20A/30A locking flanged inlets & outlets, and 30A/50A power receptacles



**WP3**  
Fits 50A non-NEMA flanged inlets & outlets for applications where mounting of the device is behind the panel

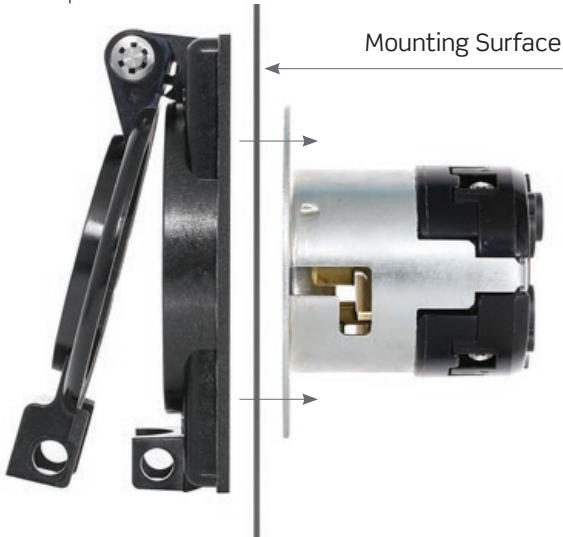

**WP4**  
Fits 50A non-NEMA flanged inlets & outlets for applications where mounting of the device is in front of the panel

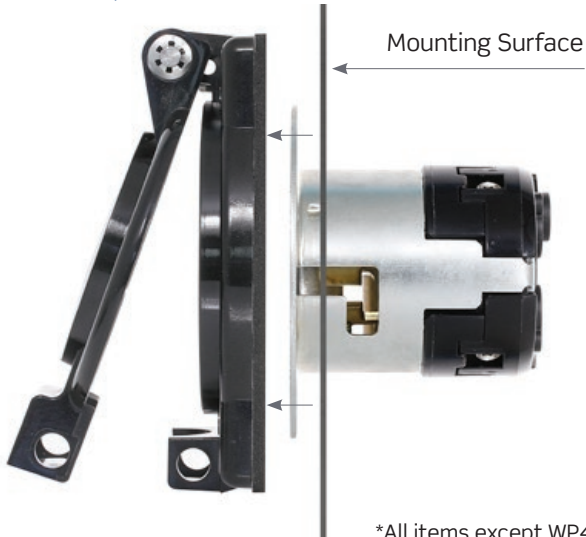

\*All items except WP4

## Ordering Information

Description	Color	Diameter Opening	Cat No
For 20 amp or 30 amp strap-mount single flush mount receptacle	Yellow	1.60"	7420-YL
	Gray		7420-G
	Black		7420-EB
For 3-wire 15 amp and 20 amp straight blade or 15 amp locking flanged outlets or inlets	Yellow	1.72"	WP1-YL
	Gray		WP1-G
	Black		WP1-EB
For 3-, 4- or 5-wire 20 amp or 30 amp locking flanged inlets or outlets	Yellow	2.25"	WP2-YL
	Gray		WP2-G
	Black		WP2-EB
For 50 amp flanged inlets and outlets mounted from behind the panel with 2.6" panel cutout	Yellow	3"	WP3-YL
	Gray		WP3-G
	Black		WP3-EB
For 50 amp flanged inlets and outlets mounted from in front of the panel with 2.6" panel cutout	Yellow	2.6"	WP4-YL
	Gray		WP4-G
	Black		WP4-EB


## Specifications

Description	WP1, WP2, WP3, 7420-CR	WP4
Material Specifications		
Cover Plate	Glass-Filled Thermoplastic	
Mounting Screws & Springs	Stainless Steel	
Standards & Certifications		
UL Standard	UL514C & UL514D	UL498
CSA	C22.2 No. 18.1 and/or 42.1	
NEMA	Type 3R	
RoHS	Compliant	
IP Rating	IP64	
Guarantees		
Product Warranty	10 Year Limited	



## Dimensions

### WP1, WP2, WP3, 7420

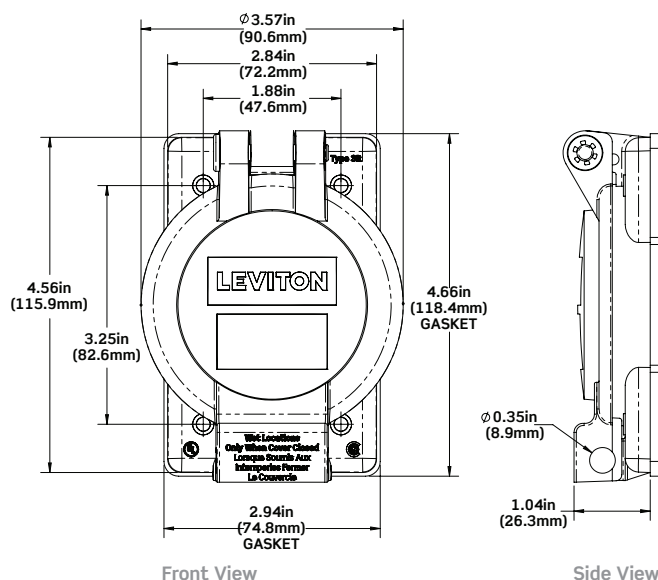

### WP4

