


S432-P6

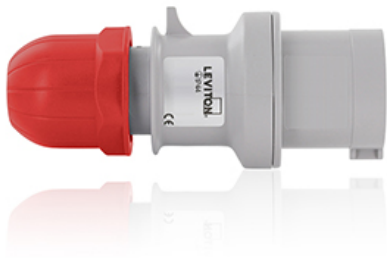

32 Amp, 346-415 Volt, International Configuration Panel Mounting Inlet, Industrial Grade

32 Amp, 346-415 Volt, 3P+N+E (4P, 5W), Clock Position 6, IEC /EN 60309-1 & 60309-2, International Configuration Plug, Industrial Grade, IP44, Splashproof - RED

ROHS Compliant : Yes

Technical Information

Electrical Specifications

Amperage : 32 A

Frequency : 50/60Hz

Pole : 4

Voltage : 346-415 VAC

Wire : 5

Environmental Specifications

IK Rating : IK08

IP Rating : IP44

Operating Temperature : -25° C to 40°C

Material Specifications

Contacts : Nickel Plated Brass

Housing : Halogen-free engineering polymer

Mechanical Specifications

Cord Grip Range (in) : .453 - .827

Terminal Accom. : 14-10 AWG

Torque Range : Terminal screws 7in-lbs|Cable Clamp 66.4 in-lbs

Product Features

Color : Red

Configuration : International

Device Type : Plug

Standards and Certifications

CE : Marked

IEC Rating : 60309-1 and 60309-2

NOM Certified : Yes

RETIE Certified : Yes

UPC Code : 078477675557

Country Of Origin : Slovakia

SPECIFICATION SUBMITTAL

JOB NAME: JOB NUMBER:	CATALOG NUMBERS: <table border="1"> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>				

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2024 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts

© 2024 Leviton Manufacturing Co., Inc.