

RP-B-LS LINEAR LED STRIP FIXTURE

RemPhosBASE



WARRANTY



RATED LIFE



VOLTAGE



DIMMING



OPTIONAL
MOTION SENSOR



OPTIONAL EMG
BATTERY BACKUP



EFFICACY





CRI



OPERATING TEMP

slim profile

flexCOLOR
switch on
each unit

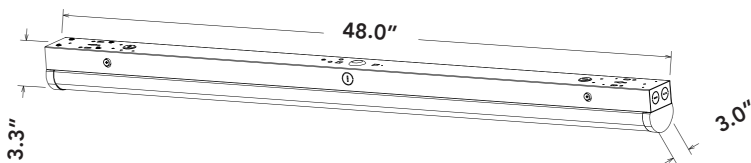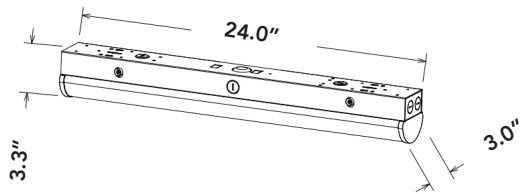

- Ability to daisy chain multiple fixtures together.
- Two installation options: suspended and surface mounted.
- flexCOLOR allows for a reduction in stocked skus.
- Great for schools, hospitals, grocery stores, offices and warehouses.

flexCOLOR

choose from 3 different
color temperatures

flexCONTROL

order without controls,
with basic sensor, or advanced
Bluetooth mesh control

PART #	UPC	WATTAGE	LUMENS	LPW	CCT (K)**	DLC CODE
RP-B-LS-2FT-25L-840-FC	844006061258	20W	2670	137	3500/4000/5000K	PGUXC6L5
RP-B-LS-2FT-25L-840-FC-OCC*	844006061265	20W	2670	137	3500/4000/5000K	PGUXC6L5
RP-B-LS-4FT-40L-840-FC	844006061319	32W	4250	134	3500/4000/5000K	PIP65N0N
RP-B-LS-4FT-40L-840-FC-OCC*	844006061326	32W	4250	134	3500/4000/5000K	PIP65N0N

* OCC part numbers come with integrated motion sensor

** 2FT set to 5000K = 140 LPW


Light Efficient Design

RemPhos

LIGHT EFFICIENT DESIGN HEADQUARTERS 188 S. Northwest Highway • Cary, IL 60013
INNOVATION & MANUFACTURING CENTER 30 Log Bridge Road, Building 200 • Middleton, MA 01949
847.380.3540 • led-llc.com

01.29.21 Information is subject to change without notice.

