

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides maintenance-free general illumination for outdoor use in residential and commercial applications such as retail, education, multi-unit housing and storage. Ideal for lighting building facades, parking areas, walkways, garages, loading areas and any other outdoor space requiring reliable safety and security.

### CONSTRUCTION

Sturdy weather-resistant aluminum housing with a bronze finish.

High performance LEDs are powered by an MVOLT driver that provides 2,300/3,100 delivered lumens at 5000K. 100,000 hours LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology. Fixture is maintenance-free.

Rated for outdoor installations -40°C minimum ambient.

Adjustable Dusk-to-Dawn, photocell standard automatically turns light on at dusk and off at dawn for convenience and energy savings.

Photocell can be disabled by rotating the photocell cover.

### OPTICS

Precision-molded acrylic lenses provide optimal luminaire spacing with Type 3 distribution.

Nighttime Friendly™ full cutoff above 90° angle, standard.

### INSTALLATION

Wall or arm mount (mounting arm sold separately).

All mounting hardware included.

### LISTINGS

UL Certified to US safety standards. C-UL Certified to Canadian safety standards. Wet location listed.

Tested in accordance with IESNA LM-79 and LM-80 standards. DLC qualified product.

### WARRANTY

5-year limited warranty. Complete warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

NOTE: Specifications are subject to change without notice.

Catalog Number
Notes
Type

### Outdoor General Purpose



# OLW

## LED WALL PACK



### Specifications

All dimensions are inches (centimeters)

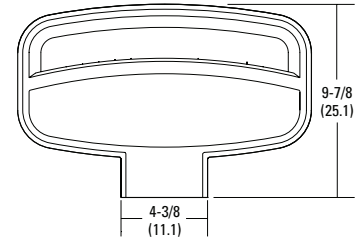

### ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

**Example: OLW 23**

OLW									
Series		Lumens / Color temperature (CCT)		Voltage		Features		Finish	
OLW	LED Wall Light	23	2300 delivered lumens / 5000K <sup>1</sup>	(blank)	MVOLT (120V-277V)	(blank)	Photocell included	(blank)	DDB Dark Bronze
		31	3100 delivered lumens / 5000K <sup>1</sup>						

**Accessories:** Order as separate catalog number.

OMA M6 14" Aluminum Mounting Arm

### Notes

1 Correlated Color Temperature (CCT) shown is nominal per ANSI C78,377-2008.

# OLW LED Wall Light

## PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.  
Tested in accordance with IESNA LM-79 and LM-80 standards.

