

## FEATURES & SPECIFICATIONS

**INTENDED USE** — The OLWP provides years of maintenance-free general illumination for commercial or residential outdoor applications such as driveways, patios, loading areas and warehouses.

**CONSTRUCTION** — Rugged cast-aluminum, corrosion-resistant rear mounting plate.

Impact resistant polycarbonate front cover/diffuser resists fading and cracking.

Driver operates at 120V.

Operating temperature -40°C to 40°C.

**OPTICS** — High-performance LEDs maintain 70% of light output at 50,000 hours of service. (LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.)

Lenses are engineered for superior lighting distribution, uniformity and fixture spacing.

See Lighting Facts Labels for specific fixture performance.

**INSTALLATION** — Designed for wall mounting more than 4' above the ground. Mounts to a recessed junction box (by others).

**LISTINGS** — UL Listed to US and Canadian safety standards for wet locations.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.


Note: Specifications subject to change without notice.



Outdoor General Purpose

# OLWP

LED WALL PACK

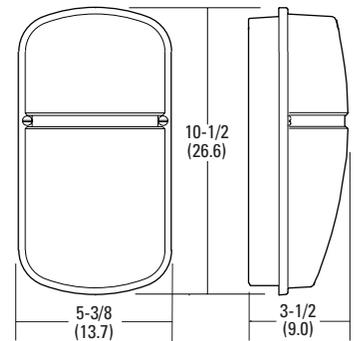

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

**Example:** OLWP LED P1 40K 120 PE BZ

OLWP	P1 40K	120	PE	BZ
Series	Lumens / Color temperature (CCT) <sup>1</sup>	Voltage	Control	Finish
OLWP	P1 40K 1414 lumens / 4000K	120 120V	PE Button photocell	BZ Bronze

### Notes



1 Nominal Correlated Color Temperature (CCT) per ANSI C78.377-2008.

# OLWP LED Wall Pack

## PHOTOMETRIC DIAGRAMS

Tested in accordance with IESNA LM-79 and LM-80 standards.

### OLWP 11

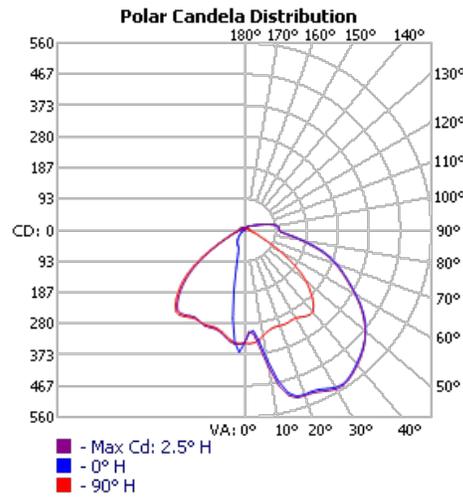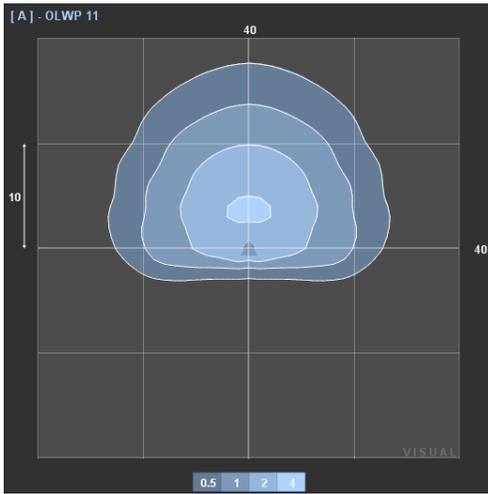

Lithonia Lighting

**LED lighting facts**  
A Program of the U.S. DOE

Light Output (Lumens)	1414
Watts	22.8
Lumens per Watt (Efficacy)	62.02

Color Accuracy Color Rendering Index (CRI)	70
---	----

Light Color  
Correlated Color Temperature (CCT) **4000 (Bright White)**

Warm White | Bright White | Daylight

2700K | 3000K | 4500K | 6500K

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: NJSM-1K4PG6 (7/11/2016)  
Model Number: OLWP LED P1 40K 120 PE  
Type: Luminaire - Other

This is a Lighting Facts label for the OLWP 11 LED wall pack. It includes the Lithonia Lighting logo and the 'LED lighting facts' logo, which is a program of the U.S. Department of Energy (DOE). The label provides the following specifications: Light Output (Lumens) is 1414, Watts is 22.8, and Lumens per Watt (Efficacy) is 62.02. The Color Accuracy is measured by the Color Rendering Index (CRI) at 70. The Light Color is 4000 (Bright White) Correlated Color Temperature (CCT). A color temperature scale is shown below, ranging from 2700K (Warm White) to 6500K (Daylight), with 3000K and 4500K also marked. The label includes a disclaimer that all results are according to IESNA LM-79-2008 and that the U.S. Department of Energy (DOE) verifies product test data and results. It also provides a website link for the Label Reference Guide and registration information: Registration Number: NJSM-1K4PG6 (7/11/2016), Model Number: OLWP LED P1 40K 120 PE, and Type: Luminaire - Other.