



Type IC, Wet, Air-Tight & Open Plenum

DESCRIPTION

4" Round Deep Regressed LED with Invisible Trim
Commercial Grade Quality Built To Last


FEATURES & BENEFITS

15W & 18W High Output versions with CRI 90+
Type IC, Air-Tight & Wet - No Housing Required
3 1/2" Deep - Install Where Ceiling Space Is Limited
Armored Cable & Metal Connectors - Open Plenum Rated
Driver Inside Connection Box with Romex Quick Connectors
and Knock Outs - Fast Installation & No Junction Box Needed

DIMENSIONS ID 4" OD 4 7/16" Ceiling Clearance Required: 3"

CUT OUT

4 1/2"

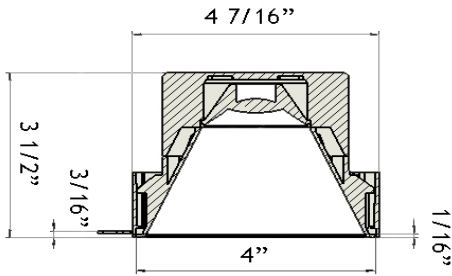

120V TRIAC Dimmable Driver Included

Optional 120V-347V Driver

0-10V Dimmable

Order Separately as

15W: Cat # LLL-LD1535TR

18W: Cat # LLL-LD2050TR



ORDERING GUIDE:

Example 15W **LD4R-30K-4R-WR-IT**

Example 18W **LD4R-30K-HO-4R-WR-IT**

LD4R -	CCT	18W only	Reflector	
	- xxK	- HO	- 4R-xR-IT	
2700K	27K		- 4R-WR-IT	White
3000K	30K		- 4R-SR-IT	Silver
3500K	35K		- 4R-BR-IT	Black
4000K	40K			
5000K	50K			
DTW 3K-2K	32K			
Dim To Warm				

LD4R-IT

4" Trimless Round Deep Regressed LED 15W/18W

Project:

Location:

Cat #:

Qty:

Notes:

SPECIFICATION

Applications	Recessed Ceiling Mount Trimless					
Energy Used	15W Regular / 18W High Output					
Color Temperature (K)	2700	3000	3500	4000	5000	DTW 3-2
Light Output 15W (lm)	1100	1200	1250	1300	1400	900
Light Output 18W (lm)	1500	1550	1600	1650	1700	1150
Beam Angle	30°					
CRI	90 +					
Default Driver Input	120V AC			Triac Dimmable		
Optional Driver Input	120V-347V AC			0-10V Dimmable		
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG					
Power Factor	0.98					
Approved Location	Insulated Ceilings, Open Plenum, Wet					
IP Rating	IP 54					
Air Tight	Yes					
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)					
Projected Life	70% Light Output at 50,000 Hours					
Certification	cULus, Energy Star (except DTW), T24					
Warranty	10 Year Residential / 5 Year Commercial					

AVAILABLE REFLECTORS



White Reflector

4R-WR-IT



Silver Reflector

4R-SR-IT



Black Reflector

4R-BR-IT

ACCESSORIES

Sold Separately



Armored Low Voltage Extension 10ft cat# **MEC10**



4 1/2" Hole Flanged with Hanger Bars cat # **FRP412**



4 1/4" Hole 26" Flat Plate cat # **RIP412**

COMPLIANCE



Type IC & Air-Tight
Open Plenum