




DESCRIPTION

12" Multi-Purpose Surface Mounted Energy-Efficient Fixture
Low Profile With Narrow Flange For Architectural Appearance

FEATURES & BENEFITS

Fast & Easy to Install in J-Box - Save on Labor
Wet Location Approved - Suitable For Indoor & Outdoor Installations
CRI 90+ for True Color Rendering
Flicker Free AC Design

DIMENSIONS OD 12" Thickness 1"

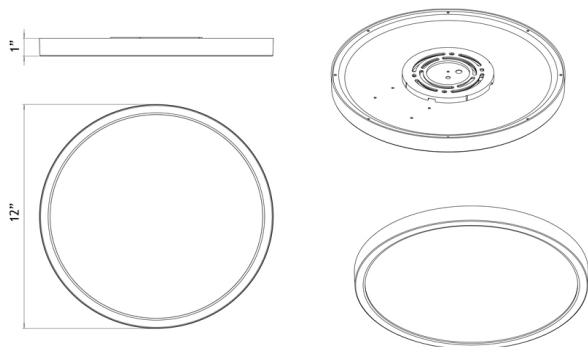

Backside



ORDERING GUIDE

Example **ADS12R9-3K-WH**

ADS12R9	CCT - xK	Trim - xx
3000K	- 3K	- WH
4000K	- 4K	- WH

5000K and Black, Bronze & Brushed Nickel Finish
Available by Custom Order

Project:

Location:

Model:

Qty:


Notes:

SPECIFICATION


Applications	Multi Family, Residential, Office, Hotel	
Energy Used	22 W	
Color Temperature (K)	3000	4000
Light Output (lm)	1400	
Halogen Equivalent	120 W	
Beam Angle	120°	
CRI	90 +	
Driver Input	120V AC 50/60 Hz	
Dimming	TRIAC Dimmers 10% - 100%	
Approved Location	Wet Locations	
Air Tight	No	
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 50,000 Hours	
Certification	cETLus, Energy Star, T24	
Warranty	5 Year	

INSTALLATION

1

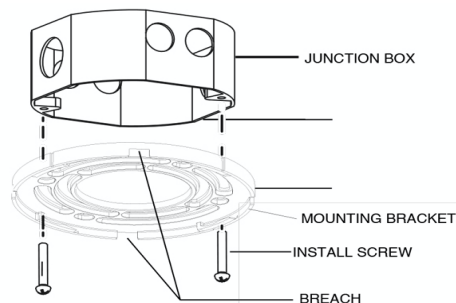

2

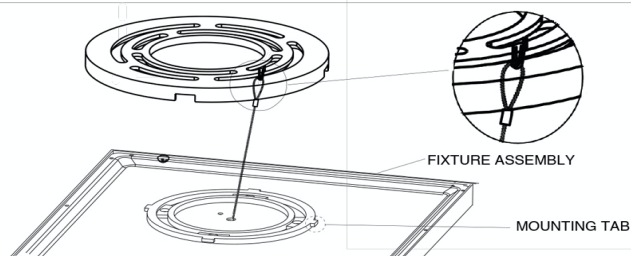

3

