



**Type IC, Wet & Air-Tight**

### DESCRIPTION

4" Round 24V DC Input Recessed LED  
Fits Where No Other Recessed Fixture Can

### FEATURES & BENEFITS


1/2" Deep - Install Directly Under Joists -  
Maximum Layout Flexibility  
Fast & Easy To Install - Save On Labor  
Type IC Rated - No Housing Required  
Connect multiple fixtures to one driver:  
up to 8 per a 96W power supply

**Driver is Not included**

### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached  
Spring Clips. Ceiling Clearance Required : 1/2"

**DIMENSIONS:** ID 4" OD 4 7/8" Cut Out 4" to 4 1/4"

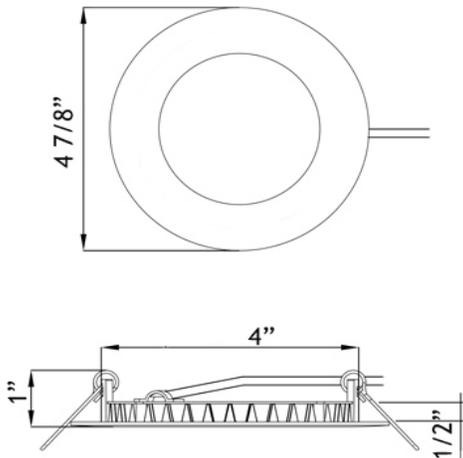

### AVAILABLE TRIMS



White

Black

ORDERING GUIDE Example: **LB4R24V / 30K / WH**

	CCT	Trim Finish	
<b>LB4R24V</b>	/	/	
3000K	<b>30K</b>	<b>WH</b>	White
4100K	<b>41K</b>	<b>BK</b>	Black

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat #: \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

### SPECIFICATION

Applications	Recessed Ceiling, Showers & Soffits	
Energy Used	11 W	
Colour Temperature	3000	4100
Light Output	700	730
Halogen Equivalent	65 W	
Beam Angle	110°	
CRI	80	
Input Voltage	24V DC	
Dimmability	To 5% With Compatible Driver & Dimmer	
Approved Location	Insulated Ceiling, Wet & Damp Locations	
IP Rating	IP 54	
Air Tight	Yes	
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)	
Projected Life	70% Light Output at 25,000 Hours	
Certification	cULus	
Warranty	3 Year	

### ACCESSORIES

Sold Separately



Flat Rough-In Plates - cat #**RIP4**



Flanged Rough-In Plate - cat #**FRP4**



Goof Ring OD 5 3/4"  
White cat #**GR4** Black cat # **GR4-BK**

### COMPLIANCE



**Type IC  
Air-Tight**