



Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat # : \_\_\_\_\_ Qty: \_\_\_\_\_

Notes: \_\_\_\_\_

### DESCRIPTION


24V DC 1.5W / ft LED flexible strip for dry locations  
 CRI 90+ for perfect light consistency with wide beam angle  
 Easy to install and low maintenance  
 Versatile accessories for installation

### APPLICATIONS


Cove lighting, Path and contour marking  
 DIY lights for home undercabinet and valance use  
 Decorative lights for holiday, event, show, exhibition

### INSTALLATION INSTRUCTIONS


1. Remove backing paper to reveal adhesive tape.



2. Press LED tape firmly onto clean smooth surface that adsorbs heat, such as metal or glass. Start at one end and gradually move along surface, making sure tape is smooth and not creased.

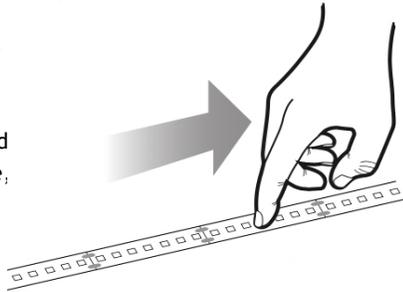

3. Cut only on trim marks

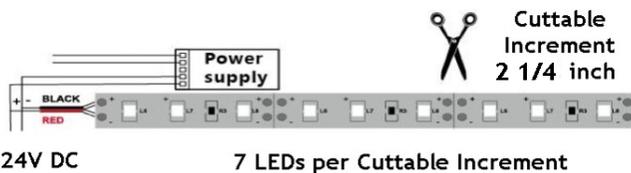

### WARNING

LED tape gets hot. Mounting firmly and securely on smooth and thermo conductive surface such as metal or glass is critical for proper thermal management and long life. Not following these instructions voids the warranty.



### ORDERING GUIDE

2700K	LBL-2216-126P-24V-10-27K
3000K	LBL-2216-126P-24V-10-30K
4000K	LBL-2216-126P-24V-10-40K
5000K	LBL-2216-126P-24V-10-50K

SPECIFICATION (tolerance +/- 10%)	
Applications	Undercabinet, Cove, Valance, Decorative
Color Temperature (K)	2700   3000   4000   5000
Power W/ft	1.5
Efficiency lm/W	95   100   105   110
Lumen lm/ft	190   200   210   220
Length per roll	100 feet / 30 meters
Maximum Length	50 ft / 15 meters
Power per Max Length	75 W
Lumen per Max Length	7,125   7,500   7,875   8,250
Beam Angle	120°
CRI	90 +
Input	24V DC
Dimmable	Yes
LED Operation Type	Constant Voltage
IP Grade	IP 20
Approved Location	Indoor / Dry Location
Ambient Temperature	-4° F (-20° C) to +104° F (+40° C)
LED source	SMD 2216
Cuttable Increment	2 1/4"
LEDs per Increment	7
Adhesive Tape Type	3M 300SE
Projected Life	70% Light Output at 20,000 Hours
Certification	cETLus
Warranty	3 Year

### LED Strip

### Aluminum Channel (Optional)



### ACCESSORIES

Sold Separately



cULus Class 2 Driver cat # **SMT-024-096VTHV2**  
 120V-277V in, 24V DC out, 96W. Triac Dimmable.  
 Built-In Wiring Chambers. Wet location



cULus Class 2 Driver cat # **LBL-DC24V96W**  
 120V in, 24V DC out, 96W. Triac / 0-10V Dimmable



Aluminum Channel With Diffused Cover  
 3.3' cat # XC610



Strip Connector No Wires cat # LSC-0



Single Connector with 6" cat # LSC-1



Two Connectors with 6" Between cat # LSC-2  
 Note: Connectors do not fit inside the channel