



LED-2-S11W-5CCT-EY-T

2" Trimless Round / Square Gimbal LED 11W

Project:

Location:

Model:Qty:

Notes:

DESCRIPTION


2" Trimless Round / Square Gimbal Recessed LED
With Integral Driver In Connection Box

FEATURES & BENEFITS

- 5CCT** user selectable 2700-3000-3500-4000-5000K
- Light output up to **1000 lm**
- CRI 90+** for True Color Rendering
- 5" Deep** - Install Where Ceiling Space Is Limited
- Type IC** Rated - No Housing Required
- Wet Location** Approved
- Driver Inside Connection Box** - No Junction Box Needed

DIMENSIONS: D 2 1/2" ; OD 3 1/2" ; Cut Out 2 5/8"

Ceiling Clearance Required: 5" 120V Triac Dim Driver Included

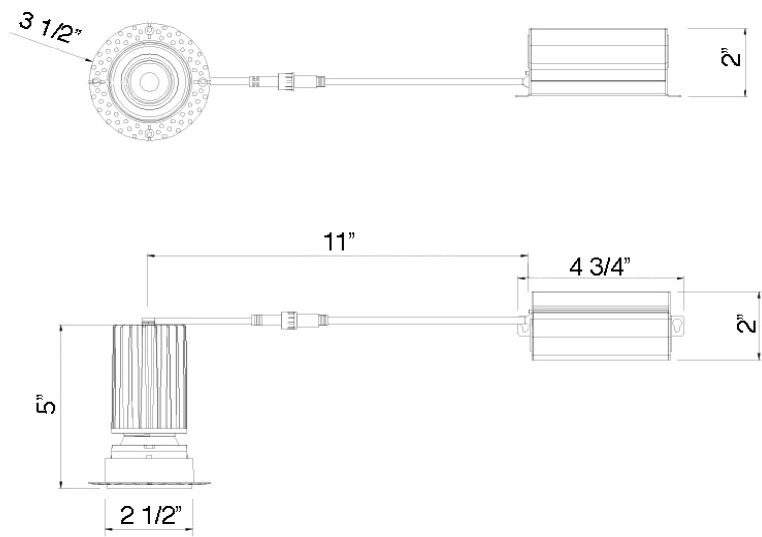

ACCESSORIES

Sold Separately

-
- [Flanged Mounting Plate with bars model FRP212](#)
-
- [Flat Mounting Plate model RIP212](#)
-
- [Jumper Cables 10 ft model JC-5CCT-10](#)

ORDERING GUIDE

	Trim	Beam Angle
--	------	------------

LED-2-S11W-5CCT-WH-EY-T	Round	White	blank for 38°
LED-2-S11W-5CCT-BK-EY-T	Round	Black	-24D for 24°
LED-2-S11W-5CCT-WH-EY-T-SQ	Square	White	
LED-2-S11W-5CCT-BK-EY-T-SQ	Square	Black	

Default beam angle is 38°, Optional is 24°

SPECIFICATION	
Applications	Commercial & High End Residential
Energy Used	11 W
Color Temperature (K)	5CCT: 2700K - 3000K - 3500K - 4000K - 5000K
Light Output White Trim (lm)	800 - 850 - 930 - 980 - 1000
Light Output Black Trim (lm)	730 - 800 - 870 - 920 - 950
Halogen Equivalent	90 W
Beam Angle	38° (default) or 24°
CRI	90 +
Driver Input	120V AC 50/60 Hz
J-Box Volume	6.53 in ³ / 2 in 2 out 12AWG
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus
Warranty	5 Year



AVAILABLE TRIMS

