

Type IC & Air-Tight



DESCRIPTION

6" Recessed LED With Integral Driver In Connection Box
Single Color or 5 CCT

FEATURES & BENEFITS


1/2" Thick - Install Directly Under Ceiling Joists

Type IC Rated - No Housing Required

Driver Inside Connection Box - No Junction Box Needed

5 CCT Switchable Option - User Selectable Light Colors

DIMENSIONS ID 6" OD 6 7/8" Cut Out 6 1/8"
Fixture Thickness: 1/2" 120V Triac Dim Driver Included

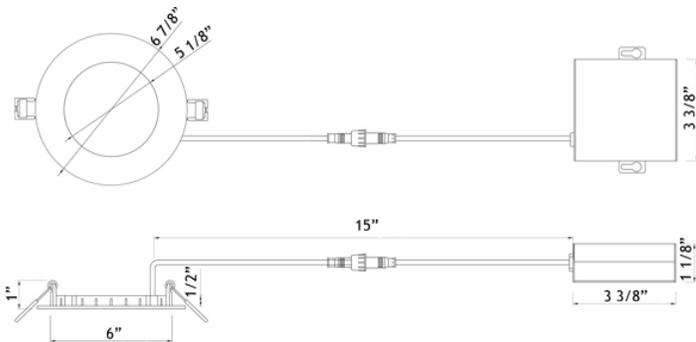

Project: _____

Location: _____

Qty: _____

Notes: _____

SPECIFICATION	
Applications	Renovations & New Construction
Energy Used	12 W
Color Temperature (K)	3000 4000 5 CCT
Light Output (lm)	800 820 800
Halogen Equivalent	75 W
Beam Angle	120°
CRI	80
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year

5 CCT Option



ORDERING GUIDE

	CCT	Trim
LED-6-S12W	- xK	- WH

Example: 3K White LED-6-S12W-3K-WH
5 CCT White LED-6-S12W-5CCT-WH

Other Trim Colors Available By Custom Order

ACCESSORIES



Mounting Plate Flat cat # MP6-2



Jumper Cable 10 ft cat # JC10
For Single Color Model Only
Maximum Extension 40 feet