



LL3R

3" Round Slim Recessed LED 11W



DESCRIPTION

3" Round Slim Recessed LED With Integral Driver In Connection Box

FEATURES & BENEFITS

1 1/4" Deep - Install Where Ceiling Space Is Limited

Type IC Rated - No Housing Required

Air-Tight & Wet Location rated

5CCT user selectable 2700-3000-3500-4000-5000K

or **Dim to Warm** 3000K to 1800K options

CRI 90+ for True Color Rendering

Driver Inside Connection Box - No Junction Box Needed


MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening

With Attached Spring Clips

Ceiling Clearance Required for driver to fit: 3 1/2"

DIMENSIONS: ID 2 7/8" OD 3 1/2" Cut Out 3"

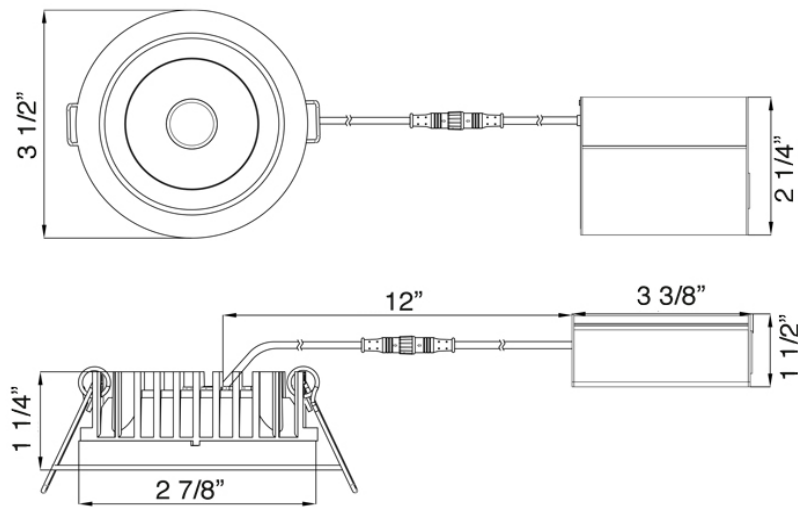

120V TRIAC Dimmable

Driver Included



Optional 120V-347V

Driver 0-10V Dimmable

Order Separately as

[model # LLL-LD1025T3](#)

ORDERING GUIDE

LL3R-5CCT-WH

[5CCT White Trim](#)

LL3R-3018K-WH

[Dim to Warm White Trim](#)

LL3R-5CCT-BK

[5CCT Black Trim](#)

LL3R-3018K-BK

[Dim to Warm Black Trim](#)



COMPLIANCE



Type IC & Air-Tight
Wet Location

Lotus LED Lights USA

250 H Street # 301, Blaine WA 98230 tel 360-200-5500

Hainesport NJ, Naples FL, Vancouver WA

www.LotusLEDLights.com

mailing addresses

warehouses

Lotus LED Lights CANADA

702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090

Delta BC & Mississauga ON

Project:

Location:

Model:

Qty:

Notes:

SPECIFICATION	
Applications	Renovations & New Construction
Power	11 W
Color Temperature (K)	2700 3000 3500 4000 5000 DTW 3000-1800K
Light Output (lm)	780 850 920 940 930 900
Halogen Equivalent	90 W
Beam Angle	38°
CRI	90 +
Default Driver Input	120V AC Triac Dimmable
Optional Driver Input	120V-347V AC 0-10V Dimmable
Junction Box Wire Capacity	Max 5 No 12 AWG or 8 No 14 AWG
Power Factor	0.95
Approved Location	Insulated Ceiling & Wet Locations
IP Rating	IP 54
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cULus
Warranty	10 Year Residential / 5 Year Commercial

AVAILABLE TRIMS



White



Black

ACCESSORIES

Sold Separately



Low Voltage Extension Cables. Max 40 ft Allowed

[6ft - model # EXC6](#)

[20ft - model # EXC20](#)



[Flat Rough-In Plates - model # RIP3](#)



[Flanged Plate with Hanger Bars model # FRP3](#)