LL4R24V

4" Round 24V Input Super Thin Recessed LED 13.5W

Type IC, Wet & Air-Tight

Project:

Location:

Cat #: Qty:

Notes:

DESCRIPTION

4" Round 24V DC Input Recessed LED With
DC Module For Regulating The Input Voltage & Current

FEATURES & BENEFITS

1/2" Deep - Install Directly Under Joists, Maximum Layout Flexibility
Wider Trim - No Goof Rings Needed For Covering Old 4" Holes
Low Voltage Wiring Only
Fast & Easy To Install - Save On Labor
Type IC Rated - No Housing Required
CRI 90 + for True Color Rendering

MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips. Ceiling Clearance Required: 1/2"

DIMENSIONS : ID 4 1/8" OD 5 1/4" Cut Out 4 1/4" to 4 1/2"

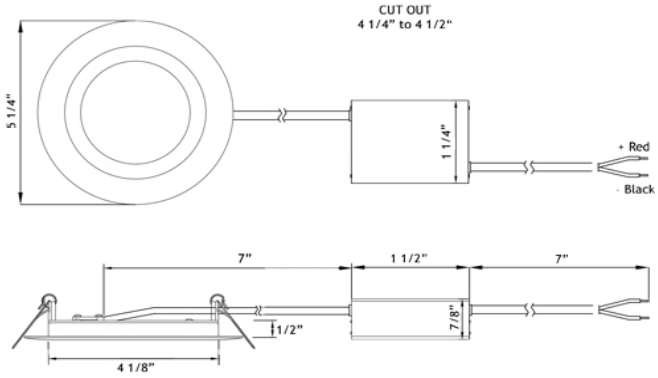

AVAILABLE TRIMS

White

ORDERING GUIDE

Example: **LL4R24V - 30K - WH**

	CCT	Trim Finish	
LL4R24V	-	-	
2700K	**27K**	**WH**	White
3000K	**30K**		
4000K	**40K**		

SPECIFICATION			
Applications	Recessed Ceiling, Showers & Soffits		
Energy Used	13.5 W		
Colour Temperature K	2700	3000	4000
Light Output lm	750	760	800
Halogen Equivalent	75 W		
Beam Angle	110°		
CRI	90 +		
Input Voltage	24V DC		
Approved Location	Insulated Ceiling, Wet & Damp Locations		
IP Rating	IP 54		
Air Tight	Yes		
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)		
Projected Life	70% Light Output at 50,000 Hours		
Certification	cULus		
Warranty	5 Year		

Every fixture comes with an external
DC Module for regulating the voltage & current
Input of this DC Module is 24V

ACCESSORIES Sold Separately

Flat Rough-In Plates - cat #**RIP412**

Flanged Rough-In Plate - cat #**FRP412**

COMPLIANCE

c UL US LISTED
E479890

WET LOCATION

Type IC
Air-Tight

Lotus LED Lights USA www.LotusLEDLights.com **Lotus LED Lights CANADA**
250 H Street # 301, Blaine WA 98230 tel 360-200-5500 800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090
Warehouses: Hainesport NJ, Naples FL, Dallas TX, Las Vegas NV, Lynnwood WA Delta BC & Mississauga ON